

fixed-mounted molded case circuit breaker w. handle frame 1600;
4AUX and trip alarm switch S24; Icu "H" Icu=85kA @ 415V, 3-pole
ETU350, LSI, In=1600A rotary coding switch Ir=640...1600A
Isd=1...10xIn, li=1.5...15xIn N conductor protec. adjustable opt. w.
ext. CT; up to 200% nut keeper kit No communication connection, no
measurement function Without additional alarm switch assembly
With mechanical calling with 2nd auxiliary release UVR, instant
Undervoltage 220-240 V AC/DC without 1st auxiliary release

Model	
Product brand name	SETRON
Product designation	Molded case circuit breaker
Design of the product	MCCB
Design of the operating mechanism	toggel handle actuator
Type of the driving mechanism	manual operating mechanism
Type of the driving mechanism / motor drive	No
Design of the overcurrent release	ETU350
General technical data	
Number of poles	3
Size of the circuit-breaker	1600 A
circuit-breaker / Design	3VA2
Mechanical service life (switching cycles) / typical	1 000
Voltage	
Insulation voltage / rated value	1 000 V
Operating voltage	
• at AC / at 50/60 Hz / rated value	690 V
Protection class IP	IP20
Protection class IP / on the front	IP20
Protective function of the overcurrent release	LSI
Power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	77 W
Current	
Operating current / at 45 °C / rated value	1 541 A
Continuous current / rated value	1 600 A
Adjustable pick-up value current	
• of the current-dependent overload release / Full-scale value	1 600 A
• of instantaneous short-circuit trip unit / initial value	2 400 A

• of instantaneous short-circuit trip unit / Full-scale value	24 000 A
Short-time withstand current (I _{cw})	
• limited to 1 s / rated value	20 kA
• at AC / at 415 V / limited to 0.5 s / rated value	20 kA
Main circuit	
Operating current	
• at 40 °C / rated value	1 600 A
• at 50 °C / rated value	1 481 A
• at 55 °C / rated value	1 417 A
• at 60 °C / rated value	1 352 A
• at 65 °C / rated value	1 281 A
• at 70 °C / rated value	1 209 A
Auxiliary circuit	
Number of CO contacts / for auxiliary contacts	4
Suitability	
Suitability for use	system protection
Adjustable parameters	
Adjustable pick-up value current	
• of the short-time delayed short-circuit release / initial value	1 600 A
• of the short-time delayed short-circuit release / Full-scale value	16 000 A
Adjustable pick-up value current / of the current-dependent overload release / initial value	640 A
Product component	
• Trip indicator	Yes
• Voltage trigger	No
• undervoltage release	Yes
Product extension / optional / motor drive	No
Product function	
Product function	
• Ground fault protection	No
Display and operation	
Display version	Without display
Short circuit	
Operational short-circuit current breaking capacity (I _{cs})	
• at 415 V / rated value	85 kA
• at 500 V / rated value	55 kA

• at 690 V / rated value	36 kA
Maximum short-circuit current breaking capacity (Icu)	
• at 415 V / rated value	85 kA
• at 440 V / rated value	85 kA
• at 500 V / rated value	55 kA
• at 690 V / rated value	36 kA

Connections

Arrangement of electrical connectors / for main current circuit	Main connection on front side
Type of electrical connection	
• for main current circuit	busbar connection

Mechanical Design

Height	296 mm
Width	210 mm
Depth	183 mm
Mounting type	fixed mounting
Net weight	14 kg

Environmental conditions

Ambient temperature / during operation	
• minimum	-25 °C
• maximum	70 °C
Ambient temperature / during storage	
• minimum	-40 °C
• maximum	70 °C

Certificates

Reference code	
• acc. to DIN EN 61346-2	Q
• acc. to DIN EN 81346-2	Q

General Product Approval	Declaration of Conformity	Test Certificates	other
--------------------------	---------------------------	-------------------	-------



[Miscellaneous](#)



[Miscellaneous](#)

[Manufacturer Declaration](#)

[Miscellaneous](#)

Further information

Industry Mall (Online ordering system)


<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA2716-6AC03-0AH0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA2716-6AC03-0AH0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2716-6AC03-0AH0

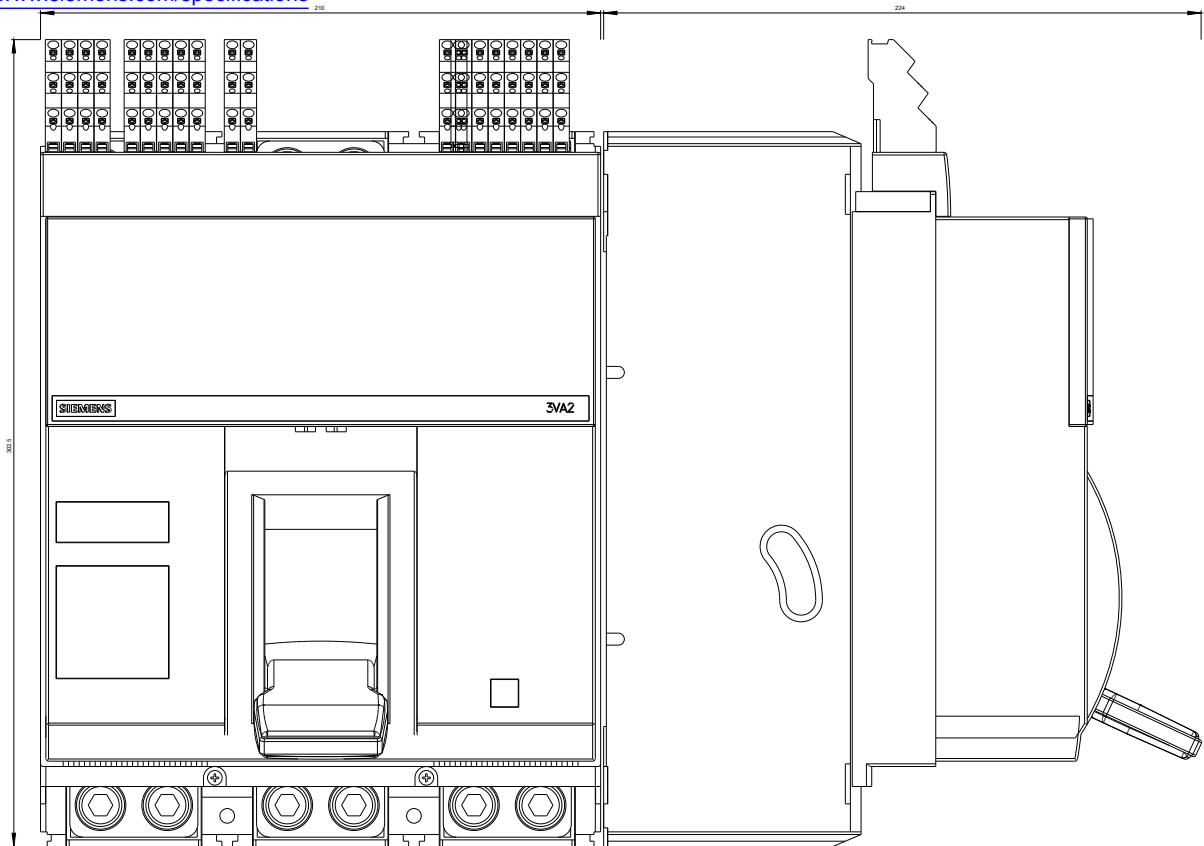



last modified:

04/15/2020