



circuit breaker 3VA6 UL frame 600 breaking capacity class C 100kA @ 480V 3-pole, line protection ETU550, LSI,  $I_n=400A$  overload protection  $I_r=160A...400A$  short-circuit protection  $I_{sd}=0.6..10x I_n$ ,  $I_i=1.5..12x I_n$  N conductor protection optionally with external current transformer, up to 160% without connection

| Model                                                                                                                 |                             |
|-----------------------------------------------------------------------------------------------------------------------|-----------------------------|
| Product brand name                                                                                                    | SETRON                      |
| Product designation                                                                                                   | Molded-case circuit breaker |
| Product designation / according to UL file                                                                            | CLAE                        |
| Product version                                                                                                       | System protection           |
| Design of the load switch / acc. to UL 489 / Heating, Air Conditioning, and Refrigeration circuit breaker (HACR Type) | Yes                         |
| Design of the overcurrent release                                                                                     | ETU550                      |
| Protective function of the overcurrent release                                                                        | LSI                         |
| Number of poles                                                                                                       | 3                           |
| General technical data                                                                                                |                             |
| Rated insulation voltage $U_i$                                                                                        | 600 V                       |
| Max. rated operational voltage $U_e$ with AC 50/60Hz                                                                  | 600 V                       |
| Power loss [W] / maximum                                                                                              | 70 W                        |
| Active power loss / for rated value of the current / at AC / in hot operating state / per pole                        | 23.3 W                      |
| Latching - endurance                                                                                                  | 15 000                      |

|                                                                           |         |
|---------------------------------------------------------------------------|---------|
| Electrical endurance (switching cycles) / at AC-1 / at 380/415 V 50/60 Hz | 4 000   |
| Electrical endurance (switching cycles) / at AC-1 / at 690 V 50/60 Hz     | 2 500   |
| Electrical endurance (switching cycles) / at 480 V / at 50/60 Hz          | 4 000   |
| Electrical endurance (switching cycles) / at 600 V / at 50/60 Hz          | 3 000   |
| Neutral conductors / upgradeable/retrofitable                             | Yes     |
| Ground fault monitoring version                                           | Without |
| Product function                                                          |         |
| • communication function                                                  | Yes     |
| • other measurement function                                              | No      |

#### Current

|                                                  |       |
|--------------------------------------------------|-------|
| Marking / acc. to UL 489 / 100%-rated breaker    | Yes   |
| Max. rated operational current of the frame size | 600 A |
| Rated continuous current I <sub>u</sub>          | 400 A |
| Operating current                                |       |
| • at 40 °C                                       | 400 A |
| • at 45 °C                                       | 400 A |
| • at 50 °C                                       | 400 A |
| • at 55 °C                                       | 400 A |
| • at 60 °C                                       | 400 A |
| • at 65 °C                                       | 400 A |
| • at 70 °C                                       | 400 A |

#### Switching capacity according to IEC 60947

|                                                                        |        |
|------------------------------------------------------------------------|--------|
| Switching capacity class of the circuit breaker                        | C      |
| Maximum short-circuit current breaking capacity (I <sub>cu</sub> )     |        |
| • at 240 V                                                             | 150 kA |
| • at 415 V                                                             | 110 kA |
| • at 690 V                                                             | 6 kA   |
| Operational short-circuit current breaking capacity (I <sub>cs</sub> ) |        |
| • at 240 V                                                             | 150 kA |
| • at 415 V                                                             | 110 kA |
| • at 690 V                                                             | 6 kA   |
| Short-circuit current making capacity (I <sub>cm</sub> )               |        |
| • at 240 V                                                             | 330 kA |
| • at 415 V                                                             | 242 kA |
| • at 690 V                                                             | 9 kA   |

#### Switching capacity according to UL 489

|                           |  |
|---------------------------|--|
| Breaking capacity current |  |
|---------------------------|--|

|            |        |
|------------|--------|
| • at 240 V | 200 kA |
| • at 480 V | 100 kA |
| • at 600 V | 35 kA  |

#### Adjustable parameters

|                                                            |         |
|------------------------------------------------------------|---------|
| Adjustable response value current / Ir min.                | 160 A   |
| Adjustable response value current / Ir max.                | 400 A   |
| Adjustable response value time / tr min.                   | 0.5     |
| Adjustable response value time / tr max.                   | 25      |
| Adjustable response value current / Isd min.               | 240 A   |
| Adjustable response value current / Isd max.               | 4 000 A |
| Adjustable response value time / tsd min.                  | 0.05 s  |
| Adjustable response value time / tsd max.                  | 0.5 s   |
| Adjustable response value time / tsd min.                  | 0.05 s  |
| Adjustable response value time / tsd max.                  | 0.5 s   |
| Adjustable response value current / li min.                | 600 A   |
| Adjustable response value current / li max.                | 4 800 A |
| Ground fault protection / tripping switchable / I2t=ON/OFF | No      |

#### Mechanical Design

|             |        |
|-------------|--------|
| Height [in] | 9.8 in |
| Height      | 248 mm |
| Width [in]  | 5.4 in |
| Width       | 138 mm |
| Depth [in]  | 4.3 in |
| Depth       | 110 mm |

#### Connections

|                                                                 |                    |
|-----------------------------------------------------------------|--------------------|
| Arrangement of electrical connectors / for main current circuit | Without connection |
| Type of electrical connection / for main current circuit        | Without            |

#### Auxiliary circuit

|                                                |   |
|------------------------------------------------|---|
| Number of CO contacts / for auxiliary contacts | 0 |
|------------------------------------------------|---|

#### Accessories

|                                            |     |
|--------------------------------------------|-----|
| Product extension / optional / motor drive | Yes |
|--------------------------------------------|-----|

#### Environmental conditions

|                                    |        |
|------------------------------------|--------|
| Protection class IP / on the front | IP40   |
| Ambient temperature                |        |
| • during operation / minimum       | -25 °C |
| • during operation / maximum       | 70 °C  |
| • during storage / minimum         | -40 °C |
| • during storage / maximum         | 80 °C  |

## Certificates

|                                                                                        |     |
|----------------------------------------------------------------------------------------|-----|
| Reference code / acc. to DIN EN 81346-2                                                | Q   |
| Certificate of suitability / as approval for NAVAL (no combat vessels) / Supplement SB | Yes |

### General Product Approval

### EMC



### Declaration of Conformity

### Shipping Approval

### other



[Miscellaneous](#)

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA6440-7JP31-2AA0>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA6440-7JP31-2AA0>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA6440-7JP31-2AA0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA6440-7JP31-2AA0)

### CAX-Online-Generator


<http://www.siemens.com/cax>

### Tender specifications

<http://www.siemens.com/specifications>

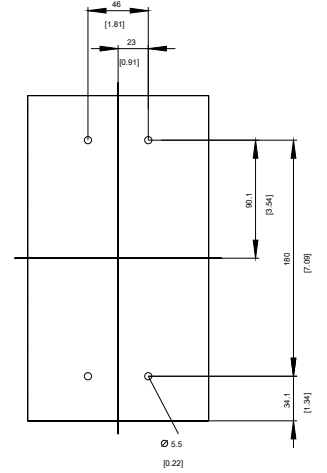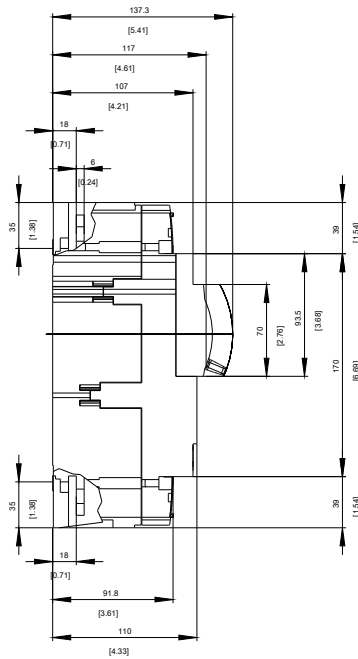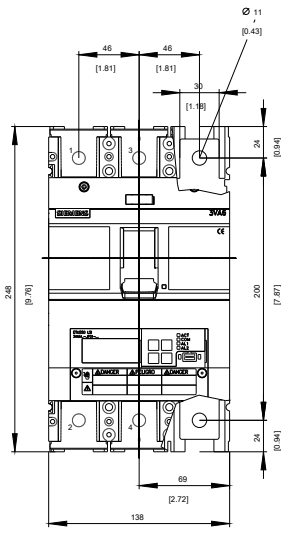



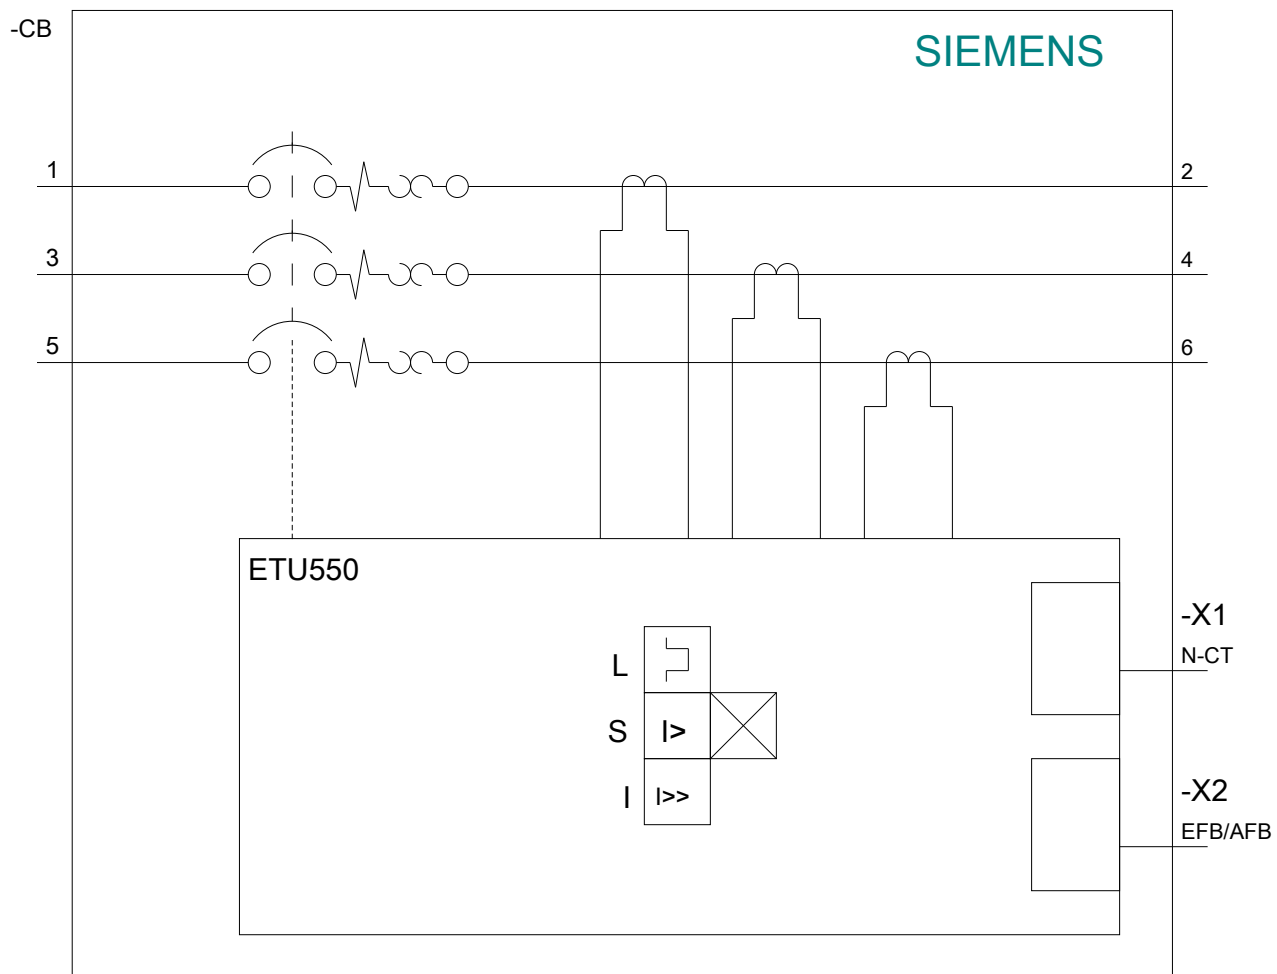

last modified:

03/16/2020