

wire connector 3 units accessory for: 3VA1 250



Model	
Product brand name	SENTRON
Product designation	accessories
Connections according IEC	
IEC-marking / of terminals	35-185 mm ² CU/AL NNL
Connectable conductor cross-section	• for copper cable / stranded / minimum 35 mm² • for copper cable / stranded / maximum 185 mm² • for aluminum cable / stranded / minimum 35 mm² • for aluminum cable / stranded / maximum 185 mm²
Wire stripping length	20 mm
Connections according UL	
Permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C
Connectable conductor cross-section	• for copper cable / stranded / minimum 2 AWG

- for copper cable / stranded / maximum
- for copper cable / finely stranded / minimum
- for copper cable / finely stranded / maximum
- for copper cable / finely stranded / with core end processing / minimum
- for copper cable / finely stranded / with core end processing / maximum

350 kcmil
2 AWG
350 kcmil
35
150

Certificates

General Product Approval	EMC	Declaration of Conformity	Test Certificates	Shipping Approval
Miscellaneous 	 RCM	 EG-Konf.	Type Test Certificates/Test Report	 LRS

other

[Manufacturer Declaration](#) [Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9253-0JB12>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9253-0JB12>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9253-0JB12

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

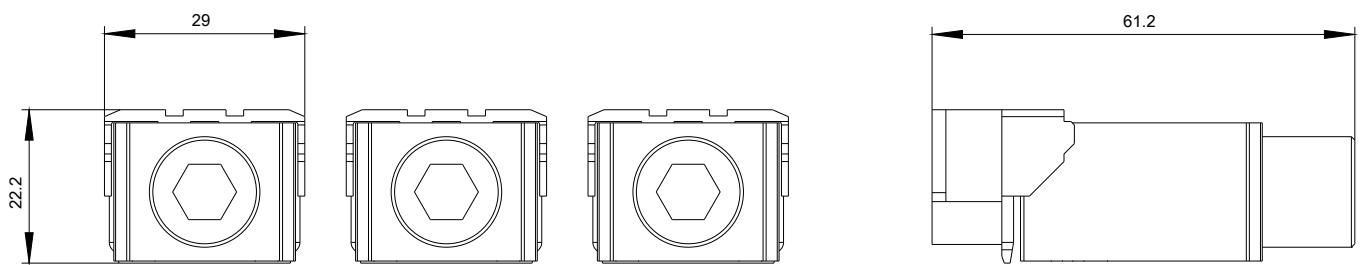

last modified:

03/16/2020