

motor operator 24-60V DC accessory for: 3VA2 100/160/250



Model	
product brand name	SENTRON
product designation	Accessories
Product version	Motorized operating mechanism (MO)
Voltage	
Type de tension pour la commande	DC
Rated operational power	250 VA
Mechanical Design	
Rated control supply voltage Us with DC	60 V
Height	75 mm
Width	105 mm
depth	132 mm
net weight	941 g
connectable conductor cross-section / solid	
• minimum	1.5 mm ²
• maximum	2.5 mm ²
connectable conductor cross-section / finely stranded / with core end processing	
• minimum	1.5 mm ²
• maximum	2.5 mm ²
connectable conductor cross-section / stranded	
• minimum	1.5 mm ²
• maximum	2.5 mm ²
ambient temperature / during operation	
• minimum	-25 °C
• maximum	70 °C
ambient temperature / during storage	
• minimum	-40 ... +80
• maximum	
tightening torque	
• minimum	0.36 N·m
• maximum	0.44 N·m
Connections according IEC	
stripped length	7 mm
Further information	

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9267-0HA10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9267-0HA10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9267-0HA10


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

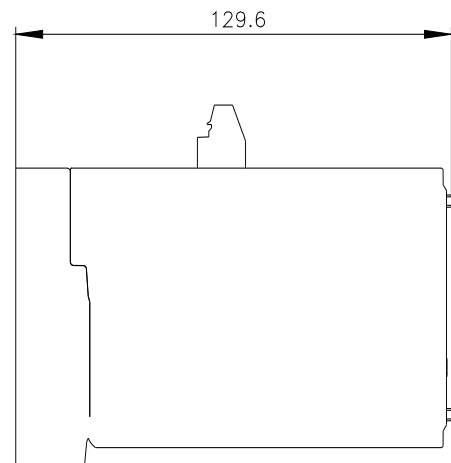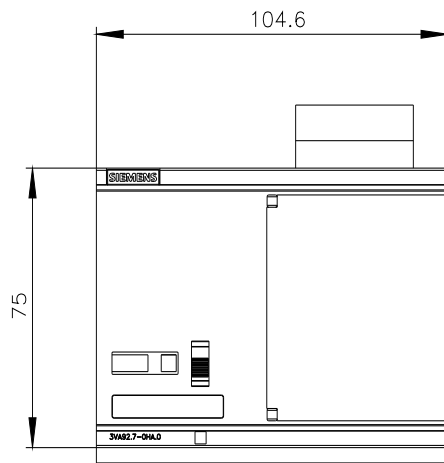

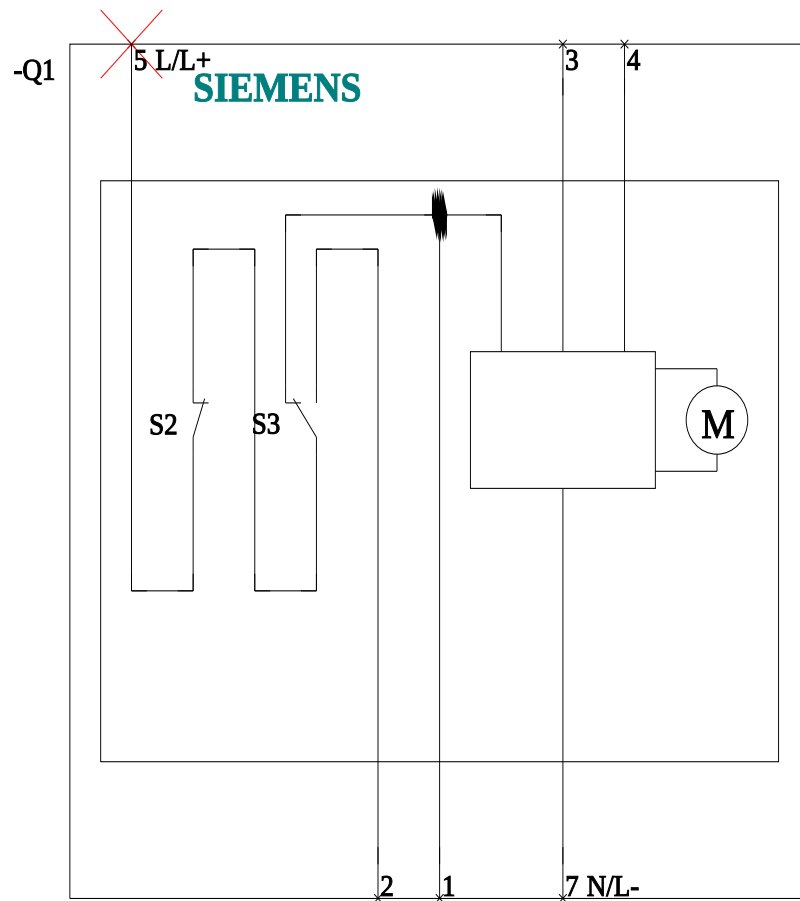

last modified:

4/29/2021 

