



Model		
product brandname		SENTRON
General technical data		
Overvoltage category		1
Protection class IP		20 acc. to IEC60529
Operating resource protection class		III according to IEC61558
Control supply voltage / at DC / rated value / maximum	V	24
Suitability		
Suitability for operation		3VA2 400/630
Accessories		
accessories		Communication and measurement function
Connectable conductor cross-section		
• solid		
— minimum	mm²	0.5
— maximum	mm²	1.5
• finely stranded / with core end processing		
— minimum	mm²	0.5

— maximum	mm ²	0.75
Tightening torque / with screw-type terminals		
• minimum	N·m	0.22
• maximum	N·m	0.25
Type of electrical connection		
• at the inputs for supply voltage		screw-type terminals
Height	mm	63
Width	mm	29
Depth	mm	33
Mounting position		Right switch pocket
Net weight	g	80
Ambient temperature		
• during operation / minimum	°C	-25
• during operation / maximum	°C	70
• during storage / minimum	°C	-40
• during storage / maximum	°C	80
• during transport / minimum	°C	-40
• during transport / maximum	°C	80

General Product Approval	Declaration of Conformity	Test Certificates	other
--------------------------	---------------------------	-------------------	-------



[Typprüfbescheinigung/W
erkszeugnis](#)

[sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA9387-0TB50>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3VA9387-0TB50/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9387-0TB50

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

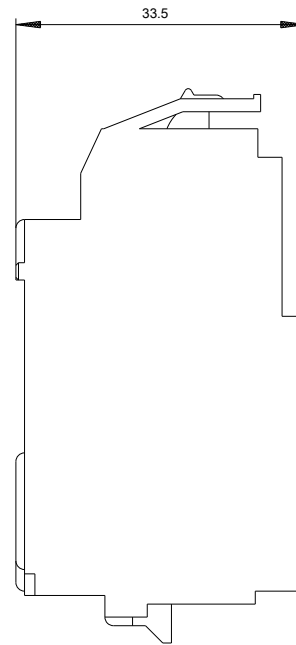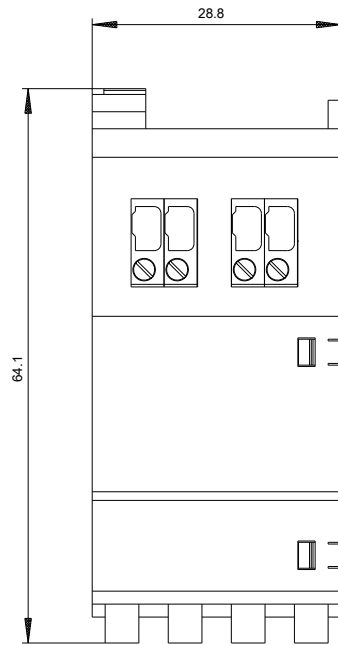

last modified:

10/14/2016