



synchronizable stored energy operator (SEO) 24 V DC accessory for: 3VA13/14;
3VA23/24

Model			
product brand name		SETRON	
General technical data			
make time / typical		0.08 s	
break time / typical		5 s	
Voltage			
type of voltage / of the operating voltage / for actuation		DC	
Rated control supply voltage Us with DC			
• minimum		24 V	
• maximal		24 V	
operating apparent power		300 VA	
Mechanical Design			
height		127.4 mm	
width		137.6 mm	
depth		159 mm	
connectable conductor cross-section / solid			
• minimum		1.5 mm²	
• maximum		2.5 mm²	
connectable conductor cross-section / finely stranded / with core end processing			
• minimum		1.5 mm²	
• maximum		2.5 mm²	
connectable conductor cross-section / stranded			
• minimum		1.5 mm²	
• maximum		2.5 mm²	
ambient temperature / during operation			
• minimum		-25 °C	
• maximum		70 °C	
tightening torque			
• minimum		0.36 N·m	
• maximum		0.44 N·m	
ambient temperature / during storage			
• minimum		-40 °C	
• maximum		80 °C	
Connections according IEC			
stripped length		7 mm	
Certificates			
General Product Approval		Marine / Shipping	other



[Miscellaneous](#)



[Confirmation](#)

other	Dangerous Good	Environment
-------	----------------	-------------

[Miscellaneous](#)

[Transport Information](#)

[Environmental Con-
firmations](#)

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9467-0HC10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9467-0HC10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9467-0HC10


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

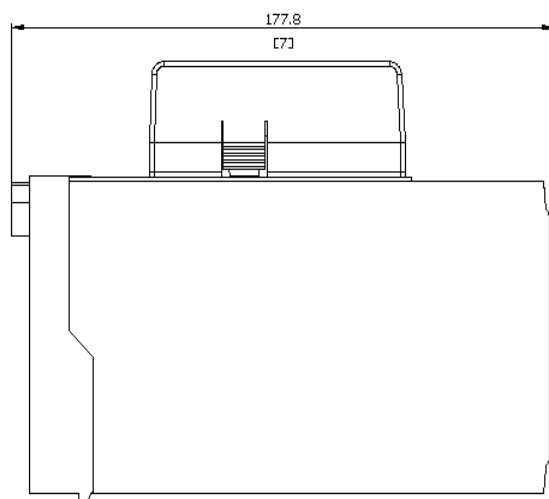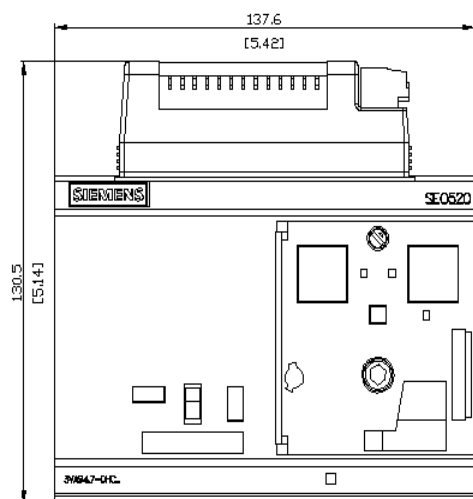

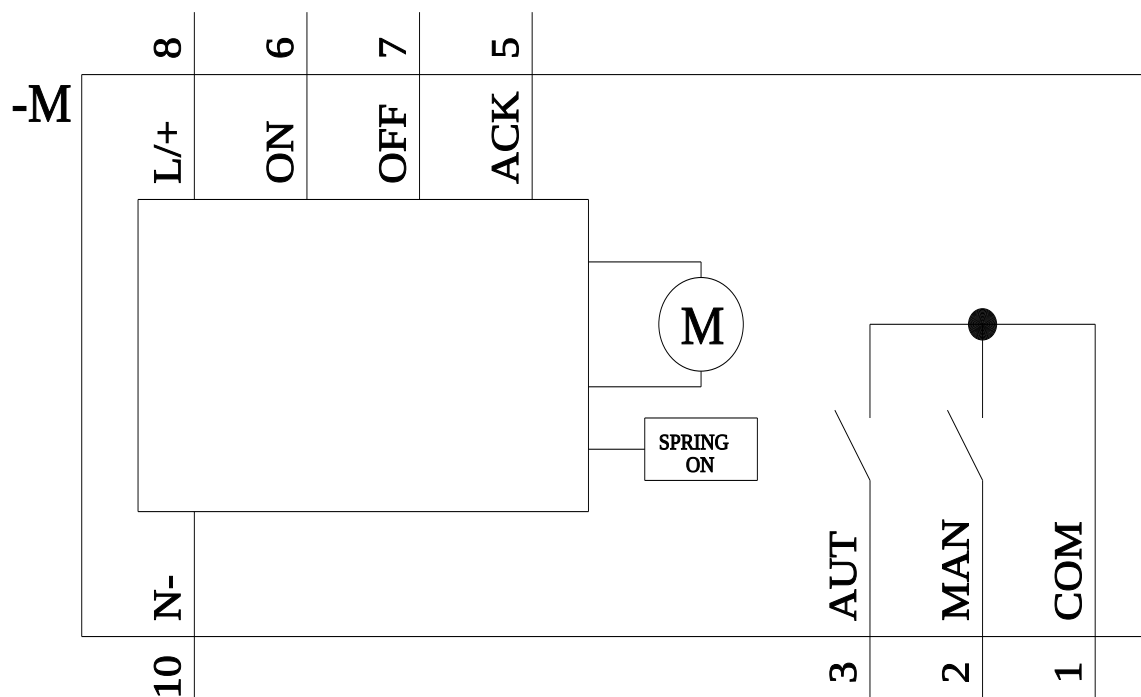

last modified:

8/15/2023 

