



Stored energy motor operator (SEO) 110-230V AC/110-250V DC
accessory for: 3VA23/3VA24

Model	
product brand name	SENTRON
product designation	Accessories
Product version	Motorized operating mechanism with stored energy mechanism (SEO)
Voltage	
Type de tension pour la commande	AC/DC
Rated control supply voltage U_s at AC 50 Hz	110 V
Rated control supply voltage U_s at AC 50 Hz	240 V
Rated control supply voltage U_s at AC 60 Hz	110 V
Rated control supply voltage U_s at AC 60 Hz	240 V
Rated operational power	300 VA
Mechanical Design	
Rated control supply voltage U_s with DC	250 V
Height	127.4 mm
Width	137.6 mm
depth	159 mm
net weight	1 980 g
connectable conductor cross-section / solid	
minimum	1.5 mm ²
maximum	2.5 mm ²
connectable conductor cross-section / finely stranded / with core end processing	
minimum	1.5 mm ²
maximum	2.5 mm ²
connectable conductor cross-section / stranded	
minimum	1.5 mm ²
maximum	2.5 mm ²
ambient temperature / during operation	
minimum	-25 °C
maximum	70 °C
ambient temperature / during storage	
minimum	-40 ... +80
maximum	
tightening torque	
minimum	0.36 N·m
maximum	0.44 N·m
Connections according IEC	
stripped length	7 mm
Further information	

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9467-0HC30>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9467-0HC30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9467-0HC30


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

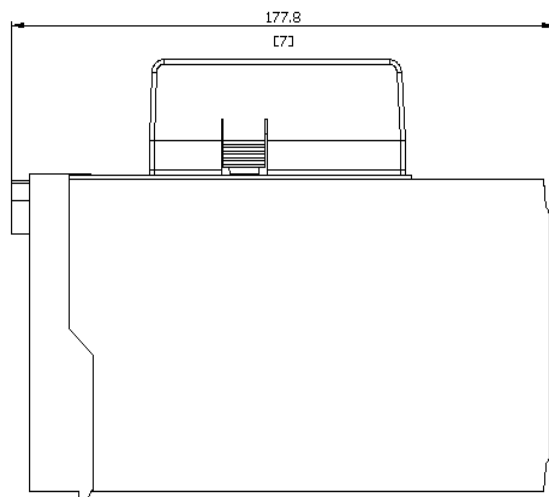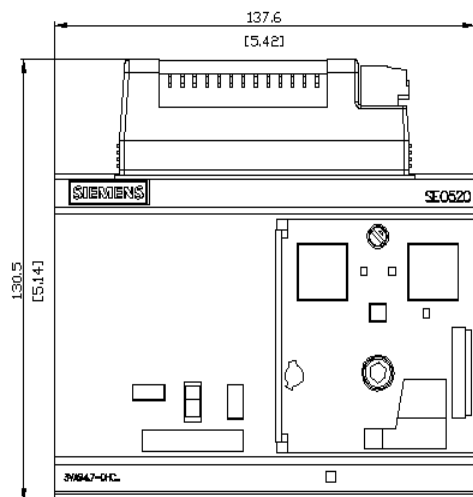

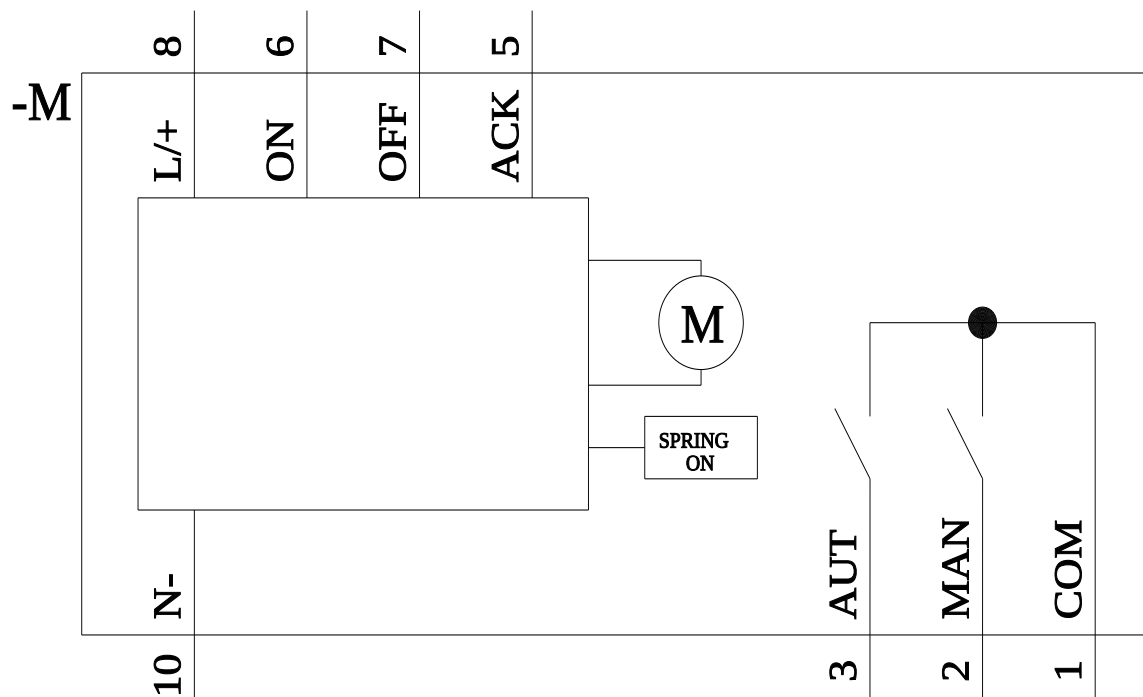

last modified:

7/9/2021 

