

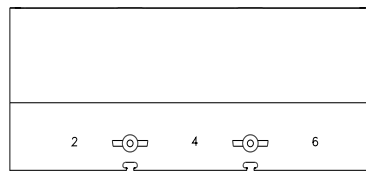




WIRE CONNECTOR 4 CABLES WITH CONTROL WIRE TAP 3 PCS.
ACCESSORY FOR: 3VA15/25 1000

Model	
product brand name	SETRON
product designation	accessories
Product version	circular conductor terminal
Accessories	Wire connector
General technical data	
designation / of the terminal	TA4.3
Connections according IEC	
connectable conductor cross-section	
• for copper cable / stranded / minimum	120 mm ²
• for copper cable / stranded / maximum	240 mm ²
• for aluminum cable / stranded / minimum	120 mm ²
• for aluminum cable / stranded / maximum	240 mm ²
stripped length	23.1 44.5
Connections according UL	
permissible temperature / of connectable conductor / according to UL 486A-486B	90 °C
connectable conductor cross-section	
• for copper cable / stranded / minimum	4/0
• for copper cable / stranded / maximum	500
• for copper cable / finely stranded / minimum	4/0
• for copper cable / finely stranded / maximum	500
• for aluminum cable / stranded / minimum	4/0
• for aluminum cable / stranded / maximum	500
tightening torque / when using copper cables	
• stranded	4/0 - 500 kcmil: 325 lb-in
• finely stranded	4/0 - 500 kcmil: 325 lb-in
Further information	
Information- and Downloadcenter (Catalogs, Brochures,...)	
http://www.siemens.com/lowvoltage/catalogs	
Industry Mall (Online ordering system)	
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9603-0JC43	
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)	
https://support.industry.siemens.com/cs/ww/en/ps/3VA9603-0JC43	
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)	
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9603-0JC43	
CAx-Online-Generator	
http://www.siemens.com/cax	
Tender specifications	
http://www.siemens.com/specifications	

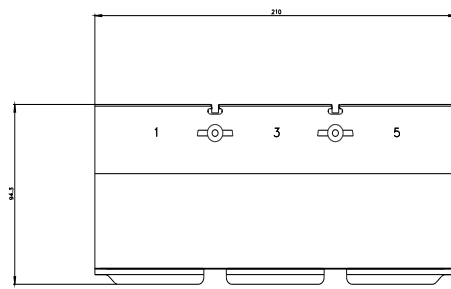

last modified:

4/6/2021 

