


circular conduc. terminal TA7.2 4 x 600...750 kcmil for 4 cables; 1 unit accessory for: circuit breaker, 3-pole 3VA58; 3VA68



Model		
product brand name	SETRON	
product designation	Circular conductor terminal 1 unit	
accessories	Wire connector	
General technical data		
designation / of the terminal	TA7.2	
type of electrical connection / with control wire tap	No	
Connetctions according UL		
permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C	
stripped length	1.2 in	
connectable conductor cross-section		
• for copper cable / stranded / minimum	600 kcmil	
• for copper cable / stranded / maximum	750 kcmil	
• for aluminum cable / stranded / minimum	600 kcmil	
• for aluminum cable / stranded / maximum	750 kcmil	
tightening torque / when using copper cables		
• stranded	600-750 kcmil: 480 lb-in	
Certificates		
General Product Approval	EMV	Test Certificates

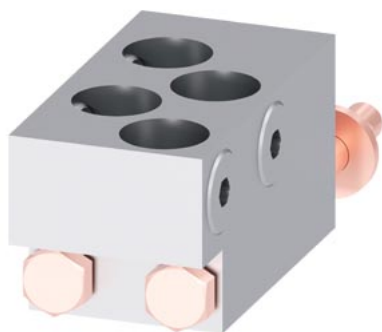

[Miscellaneous](#)



[Type Test Certificates/Test Report](#)

Marine / Shipping	other	Environment			
	Confirmation	Miscellaneous	Miscellaneous	Environmental Confirmations	Environmental Confirmations


Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
 Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
 Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9771-0JJ44>
 Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3VA9771-0JJ44>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9771-0JJ44

CAX-Online-Generator
<http://www.siemens.com/cax>

Tender specifications
<http://www.siemens.com/specifications>

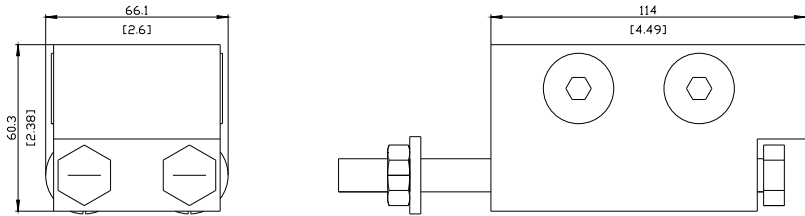

last modified:

4/19/2024 

