


CIRCUIT-BREAKER VL 150 UL TYPE DG (CAT NO. HDK3B070)
NON-INTERCHANGEABLE FRAME W. APPROBATION CIRCUIT-
BREAKER ACC. UL489 HIGH BREAKING CAPACITY 3-POLE,
NEMA RATING 65KA@480V AND 18KA@600/347V (MOLDED
CASE CIRCUIT BREAKER) OVERCURRENT RELEASE TM, LI TU=
40 DEGR. CELSIUS IN=70A, RATED CURRENT II= 450...700A
SHORT-CIRCUIT PROTECTION IR= 70A OVERCURRENT
RELEASE F. PLANT PROTECTION W/O CONNECTION
ACCESSORIES

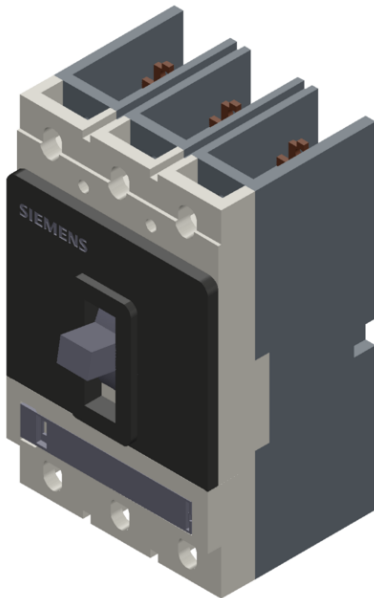

Model	
Type of the driving mechanism / motor drive	No
Design of the overcurrent release	TM
General technical data	
Number of poles	3
Size of the circuit-breaker	3VL2 UL
Electrical endurance (switching cycles) / typical	10 000
Usage category	A
Performance class for circuit breaker	N
Mechanical service life (switching cycles) / typical	20 000
Reference identifier / acc. to DIN 40719 extended according to IEC 204-2 / acc. to IEC 750	Q
Operating frequency / maximum	120 1/s
Voltage	
Rated operational voltage U _e / max.	690 V
Insulation voltage	
• rated value	800 V
• at AC / rated value	800 V
Surge voltage resistance / rated value	8 kV
Protection class	
Protection class IP	IP20
Protective function of the overcurrent release	LI
Electricity	
Operating current / at 45 °C / rated value	65.1 A
Continuous current / rated value	70 A
Derating temperature / for the rated value of the continuous current	50 °C
• acc. to UL 489	40 °C
Adjustable pick-up value current	
• of the current-dependent overload release / Full-scale value	70 A
• of instantaneous short-circuit trip unit / initial value	450 A
• of instantaneous short-circuit trip unit / Full-scale value	700 A
Main circuit	
Operating frequency	
• 1 / rated value	50 Hz
• 2 / rated value	60 Hz
Operating voltage	
• rated value / maximum	690 V

• for main current circuit / at AC / at 50 Hz / acc. to UL 489 / maximum	600 V
• for main current circuit / at AC / at 50 Hz / maximum	690 V
• for main current circuit / at AC / at 60 Hz / acc. to UL 489 / maximum	600 V
• for main current circuit / at AC / at 60 Hz / maximum	690 V
Operating current	
• at 40 °C / rated value	70 A
• at 50 °C / rated value	65.1 A
• at 55 °C / rated value	60.2 A
• at 60 °C / rated value	60.2 A
Suitability	
Suitability for use	system protection
Adjustable parameters	
Adjustable pick-up value current / of the current-dependent overload release / initial value	70 A
Product details	
Product component	
• Trip indicator	No
• Auxiliary switch	Yes
• Voltage trigger	No
• undervoltage release	No
• undervoltage release with leading contact	No
Product extension / optional / motor drive	Yes
Product function	
Product function	
• of thermal overload trip unit	fixed
• Ground fault protection	No
• for neutral conductors / Short-circuit and overload proof	No
• Overload protection	Yes
Short circuit	
Operational short-circuit current breaking capacity (Ics)	
• at 240 V / rated value	75 kA
Maximum short-circuit current breaking capacity (Icu)	
• at 240 V / rated value	100 kA
• at 480 V / acc. to NEMA / rated value	65 kA
Connections	

Arrangement of electrical connectors / for main current circuit	front side
Type of electrical connection / for main current circuit	without connection accessoires

Mechanical Design

Height	174.5 mm
Width	104.5 mm
Depth	106.5 mm
Mounting type	fixed mounting

Certificates

Certificate of suitability	UL high switching capacity (H), non-interchangeable
Reference identifier	Q
• acc. to DIN EN 61346-2	

General Product Approval	EMC	Declaration of Conformity
--------------------------	-----	---------------------------



[Miscellaneous](#)



Test Certificates	Shipping Approval	other
-------------------	-------------------	-------

[Special Test Certificate](#)



[Miscellaneous](#)

[Environmental Confirmations](#)

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VL2507-2KN30-0AB1>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VL2507-2KN30-0AB1>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VL2507-2KN30-0AB1

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>