


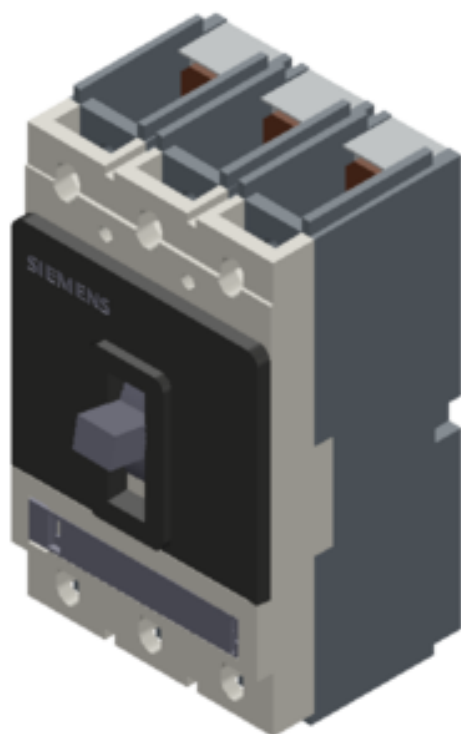

CIRCUIT-BREAKER VL 250N STANDARD BREAKING
CAPACITY ICU=55KA / 415 V AC 3 POLE, LINE
PROTECTION OVERCURRENT RELEASE TM, LI
IN=250A, RATED CURRENT IR=200-250A,
OVERLOAD II=1200-2500A, SHORT-CIRCUIT

Certificates

General Product Approval			EMC
 CCC	sonstig		 C-TICK
		TSE	KTL

Declaration of Conformity	Test Certificates	Shipping Approval			
 EG-Konf.	spezielle Prüfbescheinigungen n	 ABS	 BUREAU VERITAS	 DNV	 GL

Shipping Approval				other
 LRS	 PRS	 RINA	 RMRS	Umweltbestätigung sonstig

other
Bestätigungen

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VL37251DC368VD1>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3VL37251DC368VD1/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VL37251DC368VD1

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

last modified:

13.08.2015