


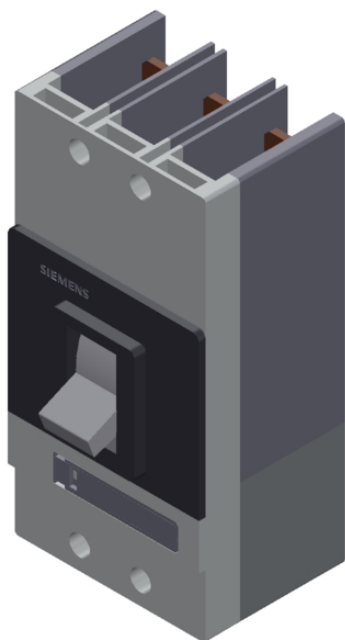

Similar to image

CIRCUIT-BREAKER VL 400H HIGH BREAKING CAPACITY
R.U.S.-C.BR.C.= 70 KA,
415 V AC 3-POLE,
MOTOR PROTECTION ELECTRONIC TRIP UNIT ETU30M,
LI IN=315A,
RATED CURRENT TC= 10A ... 30,
TIME LAG CLASS II= 6 ... 11 X IN,
SHORT-CIRCUIT PROTECTION WITHOUT AUXILIARY
RELEASE WITHOUT AUXILIARY/ALARM SWITCH

General technical data:

Number of poles		3
Design of the overcurrent release		ETU30M
Acceptability for application		Motor Protection
Utilization category		A
Electrical operating cycles as operating time / typical		10,000
Mechanical operating cycles as operating time / typical		20,000
Active power loss / maximum	W	90
Product component		
• auxiliary switch		No
• Voltage trigger		No
• undervoltage release mechanism		No
• undervoltage release with leading contact		No
Product function		
• of the thermal overload release		adjustable
• ground-fault protection		No
• for zero conductors / short-circuit and overload protection		No
• overload protection		Yes
Operating cycles / maximum	1/s	120

Protection class IP		IP20
Protective function of the overcurrent release		LI
Impulse voltage resistance / rated value	kV	8
Ambient temperature		
• during operating	°C	-25 ... +70
• during storage	°C	-40 ... +80

Main circuit:

Insulation voltage / for AC / rated value	V	800
Operating frequency		
• 1 / rated value	Hz	50
• 2 / rated value	Hz	60
Service power / at AC-3		
• at 230 V / rated value	kW	57.9
• at 400 V / rated value	kW	174.6
Reference code		
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		Q
• according to DIN EN 61346-2		Q
Operating voltage / for main circuit		
• at 50 Hz / with AC		
• maximum	V	690
• at 60 Hz / with AC		
• maximum	V	690
Operating current		
• at 40 °C / rated value	A	315
• at 50 °C / rated value	A	315
• at 60 °C / rated value	A	299.3
• at 70 °C / rated value	A	252
Continuous current / rated value	A	315
Derating temperature / for the rated value of the continuous current	°C	50

Auxiliary circuit:

Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0

Short-circuit:

Adjustable response current		
• of the current-dependent overload release	A	126 ... 315
• of the non-delayed short-circuit release	A	1,890 ... 3,465

Breaking capacity limit short-circuit current (Icu) / at 415 V / rated value	kA	70
---	----	----

Installation/mounting/dimensions:		
Mounting type		fixed mounting
Height	mm	279.5
Width	mm	139
Depth	mm	163.5

Connections:		
Arrangement of electrical connectors / for main current circuit		front side
Design of the electrical connection / for main current circuit		screw-type terminals
Type of the connectable conductor cross-section • for main contacts • with flexible busbar • solid • finely stranded / with conductor end processing • stranded • for auxiliary contacts • solid • finely stranded / with conductor end processing		25 x 10 50 ... 300 mm ² 50 ... 240 mm ² 50 ... 300 mm ² 0.75 ... 1.5 mm ² 0,75 ... 1.0 mm ²

Certificates/approvals:		
General Product Approval	Declaration of Conformity	Test Certificates



[Special Test Certificate](#)

Shipping Approval



other

[Confirmation](#)

[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VL4731-2SS36-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3VL4731-2SS36-0AA0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VL4731-2SS36-0AA0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

last change:

Sep 1, 2014