


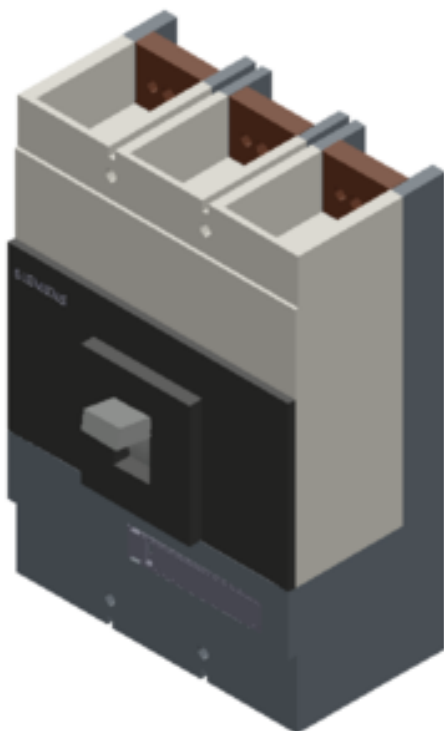

CIRCUIT-BREAKER VL 630N STANDARD BREAKING CAPACITY R.U.S.-C.BR.C.= 50 KA, 415 V AC 3-POLE, MOTOR PROTECTION ELECTRONIC TRIP UNIT ETU30M, LI IN=500A, RATED CURRENT TC= 10A ... 30, TIME LAG CLASS II= 6 ... 12.5 X IN, SHORT-CIRCUIT PROTECTION

Model		
Type of the driving mechanism / motor drive		No
Design of the overcurrent release		ETU30M
General technical data		
Number of poles		3
Size of the circuit-breaker		3VL5
Electrical endurance (switching cycles) / typical		5 000
Usage category		A
Performance class for circuit breaker		N
Mechanical service life (switching cycles) / typical		10 000
Equipment marking / acc. to DIN 40719 extended according to IEC 204-2 / acc. to IEC 750		Q
Operating frequency / maximum	1/s	60
Voltage		
Rated operational voltage Ue / max.	V	690
Insulation voltage		
• rated value	V	800
• at AC / rated value	V	800

Surge voltage resistance / rated value	kV	8
Protection class		
Protection class IP		IP20
Protective function of the overcurrent release		LI
Dissipation		
Power loss [W]		
• maximum	W	118
Electricity		
Continuous current / rated value	A	500
Derating temperature / for the rated value of the continuous current	°C	50
Adjustable pick-up value current		
• of the current-dependent overload release / Full-scale value	A	500
• of instantaneous short-circuit trip unit / initial value	A	3 000
• of instantaneous short-circuit trip unit / Full-scale value	A	6 250
Main circuit		
Operating frequency		
• 1 / rated value	Hz	50
• 2 / rated value	Hz	60
Operating power / at AC-3		
• at 230 V / rated value	kW	92
• at 400 V / rated value	kW	277.1
Operating voltage		
• for main current circuit / at AC / at 50 Hz / maximum	V	690
• for main current circuit / at AC / at 60 Hz / maximum	V	690
Operating current		
• at 40 °C / rated value	A	500
• at 50 °C / rated value	A	500
• at 55 °C / rated value	A	475
• at 60 °C / rated value	A	475
• at 65 °C / rated value	A	400
• at 70 °C / rated value	A	400
Auxiliary circuit		
Number of CO contacts / for auxiliary contacts		0
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0

Suitability		
Suitability for use		Motor Protection
Adjustable parameters		
Adjustable pick-up value current / of the current-dependent overload release / initial value	A	200
Product details		
Product component		
• Trip indicator		No
• Auxiliary switch		No
• Voltage trigger		No
• undervoltage release		No
• undervoltage release with leading contact		No
Product extension / optional / motor drive		Yes
Product function		
Product function		
• of thermal overload trip unit		adjustable
• Ground fault protection		No
• for neutral conductors / Short-circuit and overload proof		No
• Overload protection		Yes
Short circuit		
Operational short-circuit current breaking capacity (Ics)		
• at 240 V / rated value	kA	65
• at 415 V / rated value	kA	55
• at 500 V / rated value	kA	20
• at 690 V / rated value	kA	10
Maximum short-circuit current breaking capacity (Icu)		
• at 240 V / rated value	kA	65
• at 415 V / rated value	kA	55
• at 440 V / rated value	kA	35
• at 480 V / acc. to NEMA / rated value	kA	25
• at 500 V / rated value	kA	25
• at 600 V / acc. to NEMA / rated value	kA	20
• at 690 V / rated value	kA	20
Connections		
Arrangement of electrical connectors / for main current circuit		front side
Type of electrical connection / for main current circuit		screw-type terminals
Mechanical Design		

Height	mm	279.5
Width	mm	190
Depth	mm	138.5
Mounting type		fixed mounting

Environmental conditions

Ambient temperature

• during operation / minimum	°C	-25
• during operation / maximum	°C	70
• during storage / minimum	°C	-40
• during storage / maximum	°C	80

Certificates

Certificate of suitability IEC, standard switching capacity (N)

Equipment marking
• acc. to DIN EN 61346-2 Q

General Product Approval

EMC

Declaration of Conformity



[sonstig](#)



[TSE](#)



EG-Konf.

Test Certificates

Shipping Approval

other

[spezielle Prüfbescheinigungen](#)
[n](#)



[Umweltbestätigung](#)

other

[Bestätigungen](#)

[sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VL57501SS360AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3VL57501SS360AA0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VL57501SS360AA0

CAX-Online-Generator
<http://www.siemens.com/cax>

Tender specifications
<http://ausschreibungstexte.siemens.com/tiplv>

last modified:

11.04.2016