


circuit breaker VL1600N standard breaking capacity Icu=55kA, 415V AC 3-pole, line protection trip unit ETU20, LSI In=1600A, rated current IR=640...1600A, overload protection, ISD=1.5 to 8 xIR, II=9 xIN short-circuit protection without auxiliary release Auxiliary/alarm switch mounting kit 2 AUX (1 NO+1 NC)+1 AS (1 NO)

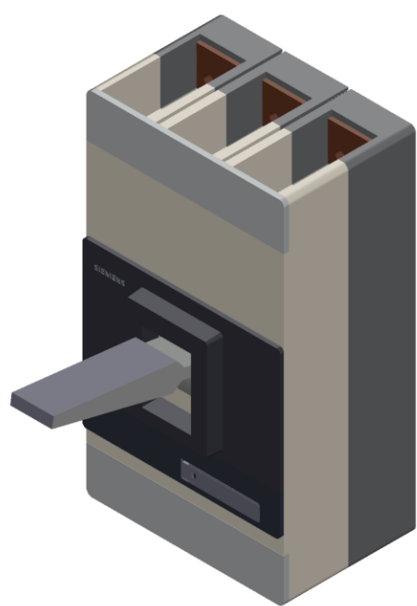

Model	
type of the driving mechanism / motor drive	No
design of the overcurrent release	ETU20
General technical data	
number of poles	3
size of the circuit-breaker	3VL8
mechanical service life (switching cycles) / typical	3 000

electrical endurance (switching cycles) / typical	1 500
utilization category	A
performance class for circuit breaker	N
reference code / acc. to DIN 40719 extended according to IEC 204-2 / acc. to IEC 750	Q
operating frequency / maximum	30 1/s

Voltage

Rated operational voltage U _e / max.	690 V
insulation voltage	
• rated value	800 V
• at AC / rated value	800 V
surge voltage resistance / rated value	8 kV
operating voltage	
• rated value / maximum	690 V
• for main current circuit / at AC / at 50 Hz / maximum	690 V
• for main current circuit / at AC / at 60 Hz / maximum	690 V

Protection class

protection class IP	IP20
protection function of the overcurrent release	LSI

Current

continuous current / rated value	1 600 A
derating temperature / for the rated value of the continuous current	50 °C
adjustable current response value current	
• of the current-dependent overload release / full- scale value	1 600 A
• of instantaneous short-circuit trip unit / initial value	14 400 A
• of instantaneous short-circuit trip unit / full-scale value	14 400 A

Main circuit

operating frequency	
• 1 / rated value	50 Hz
• 2 / rated value	60 Hz
operational current	
• at 40 °C / rated value	1 600 A
• at 50 °C / rated value	1 600 A
• at 55 °C / rated value	1 520 A
• at 60 °C / rated value	1 520 A
• at 65 °C / rated value	1 280 A

- at 70 °C / rated value

1 280 A

Auxiliary circuit

number of CO contacts / for auxiliary contacts	0
number of NC contacts / for auxiliary contacts	1
number of NO contacts / for auxiliary contacts	2

Suitability

suitability for use	system/generator protection
---------------------	-----------------------------

Adjustable parameters

adjustable current response value current / of the short-time delayed short-circuit release / full-scale value	12 800 A
adjustable current response value current / of the current-dependent overload release / initial value	640 A

Product details

product component	
• trip indicator	Yes
• auxiliary switch	Yes
• voltage trigger	No
• undervoltage release	No
• undervoltage release with leading contact	No
product extension / optional / motor drive	Yes

Product function

product function	
• of thermal overload trip unit	adjustable
• grounding protection	No
• for neutral conductors / short-circuit and overload proof	No
• overload protection	Yes

Short circuit

breaking capacity operating short-circuit current (Ics)	
• at 240 V / rated value	35 kA
• at 415 V / rated value	28 kA
• at 500 V / rated value	20 kA
• at 690 V / rated value	10 kA
breaking capacity maximum short-circuit current (Icu)	
• at 240 V / rated value	65 kA
• at 415 V / rated value	55 kA
• at 440 V / rated value	35 kA
• at 480 V / acc. to NEMA / rated value	25 kA
• at 500 V / rated value	25 kA

- at 600 V / acc. to NEMA / rated value
- at 690 V / rated value

20 kA

20 kA

Connections

arrangement of electrical connectors / for main current circuit	front side
type of connectable conductor cross-sections / for auxiliary contacts	
• solid	0.75 ... 1.5 mm ²
• finely stranded / with core end processing	0,75 ... 1.0 mm ²
type of electrical connection / for main current circuit	without connection accessoires

Mechanical Design

height	406.5 mm
width	228.5 mm
depth	333.5 mm
fastening method	fixed mounting

Environmental conditions

ambient temperature / during operation	
• minimum	-25 °C
• maximum	70 °C
ambient temperature / during storage	
• minimum	-40 °C
• maximum	80 °C

Certificates

certificate of suitability	IEC, standard switching capacity (N)
reference code	
• acc. to DIN EN 61346-2	Q

General Product Approval

EMC

Test Certificates

Shipping Approval



CCC

[Miscellaneous](#)

[TSE](#)



C-Tick

[Special Test Certificate](#)



RINA

Shipping Approval

other



RMRS

[Miscellaneous](#)

[Environmental Confirmations](#)

[Confirmation](#)

[Manufacturer Declaration](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VL8716-1SE30-0AE1>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VL8716-1SE30-0AE1>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VL8716-1SE30-0AE1

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>