

fixed-mounted circuit breaker 3-pole, size I, IEC In=630A to 690V, AC50/60Hz Icu=55kA at 500V rear connection horizontal Overcurrent release ETU 76 LSING protection adjustable 0.4-1 in with graphic display U cubicle bus with ground fault protection Opt.: Comm./measuring func./ZSI Motorized/manual operating mechanism with spring charging motor AC 50/60 Hz 208-240 V or 220-250 V DC Activation AC 50/60 Hz 230 V, 220 V DC With 1st auxiliary release Shunt release "F", F1 50/60 Hz 230 V AC/220 V DC, 100% on-load factor With 2nd auxiliary release "F", F2 Shunt release 230 V AC/220 V DC, 100% on-load factor 2NO+2NC

Model	
product brand name	SENTRON
product designation	ACB
design of the product	IEC 60947-2
design of the actuating element	Pushbutton
type of the driving mechanism	Manual/motorized operating mechanism with mechanical and electrical closing
type of the driving mechanism / motor drive	Yes
design of the overcurrent release	ETU76B
General technical data	
number of poles	3
size of the circuit-breaker	1
utilization category	B
circuit-breaker / Design	3WL1
Voltage	
Rated insulation voltage Ui	1 000 V
insulation voltage / rated value	1 000 V
operating voltage	
• at AC / at 50/60 Hz / rated value	690 V
Protection class	
protection class IP	IP20
protection class IP / on the front	IP20
protection function of the overcurrent release	LSING
Dissipation	
power loss [W]	
• for rated value of the current / at AC / in hot operating state / per pole	33.3 W
• maximum	100 W
Current	
operational current	
• at 40 °C / rated value	630 A
• at 45 °C / rated value	630 A
• at 50 °C / rated value	630 A
• at 55 °C / rated value	630 A
continuous current / rated value / maximum	630 A
continuous current / rated value	630 A
adjustable current response value current	
• of the current-dependent overload release / full-scale value	630 A
• of instantaneous short-circuit trip unit / minimum	945 A
• of instantaneous short-circuit trip unit / maximum	44 000 A
Main circuit	
operating frequency	
• 1 / rated value	50 Hz
• 2 / rated value	60 Hz

Auxiliary circuit				
number of NC contacts / for auxiliary contacts		2		
number of NO contacts / for auxiliary contacts		2		
Suitability				
suitability for use		Plant / motor protection		
Adjustable parameters				
adjustable current response value current				
• of the L-trip / with I4t characteristic / initial value		252 A		
• of the L-trip / with I4t characteristic / full-scale value		630 A		
adjustable current response value current / of the current-dependent overload release / initial value		252 A		
Product details				
product component				
• trip indicator		Yes		
• voltage trigger		Yes		
• undervoltage release		No		
design of the auxiliary switch		2 NO + 2 NC		
product extension / optional / motor drive		No		
Product function				
product function				
• grounding protection		Yes		
• phase failure detection		Yes		
Display and operation				
display version		With fully-graphical display		
Short circuit				
breaking capacity operating short-circuit current (Ics)				
• at 415 V / rated value		55 kA		
• at 500 V / rated value		55 kA		
• at 690 V / rated value		42 kA		
breaking capacity maximum short-circuit current (Icu)				
• at 415 V / rated value		55 kA		
• at 500 V / rated value		55 kA		
• at 690 V / rated value		42 kA		
Connections				
arrangement of electrical connectors / for main current circuit		Main connection rear side horizontal		
type of electrical connection / for main current circuit		busbar connection		
Mechanical Design				
height		439.5 mm		
width		320 mm		
depth		337 mm		
fastening method		fixed mounting		
Environmental conditions				
ambient temperature / during operation				
• minimum		-20 °C		
• maximum		55 °C		
ambient temperature / during storage				
• minimum		-40 °C		
• maximum		70 °C		
General Product Approval		EMC	Declaration of Conformity	Test Certificates



[UK Declaration of Conformity](#)

[Special Test Certificate](#)

Test Certificates

Marine / Shipping

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)



Marine / Shipping

other

[CCS / China Classification Society](#)



[Miscellaneous](#)

[Confirmation](#)

[Environmental Confirmations](#)

[Miscellaneous](#)

Dangerous Good

[Transport Information](#)

Further information

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1106-2NG32-4GG2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1106-2NG32-4GG2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1106-2NG32-4GG2


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

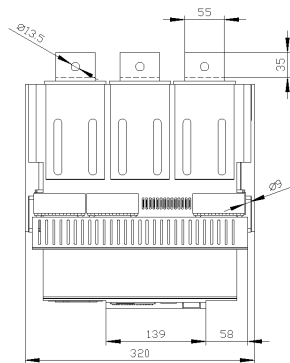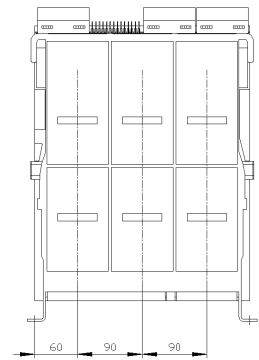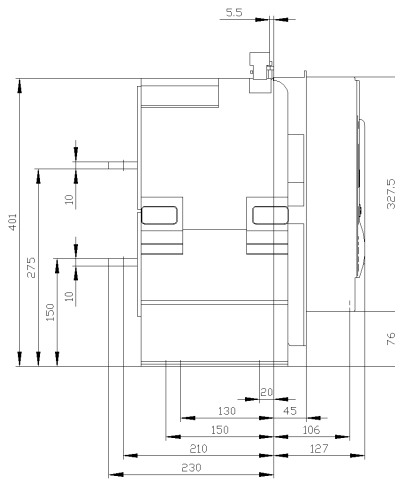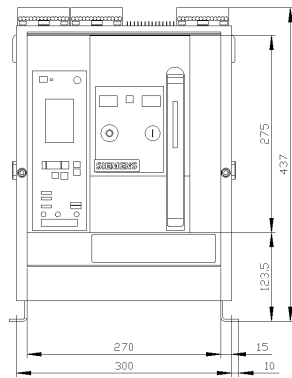

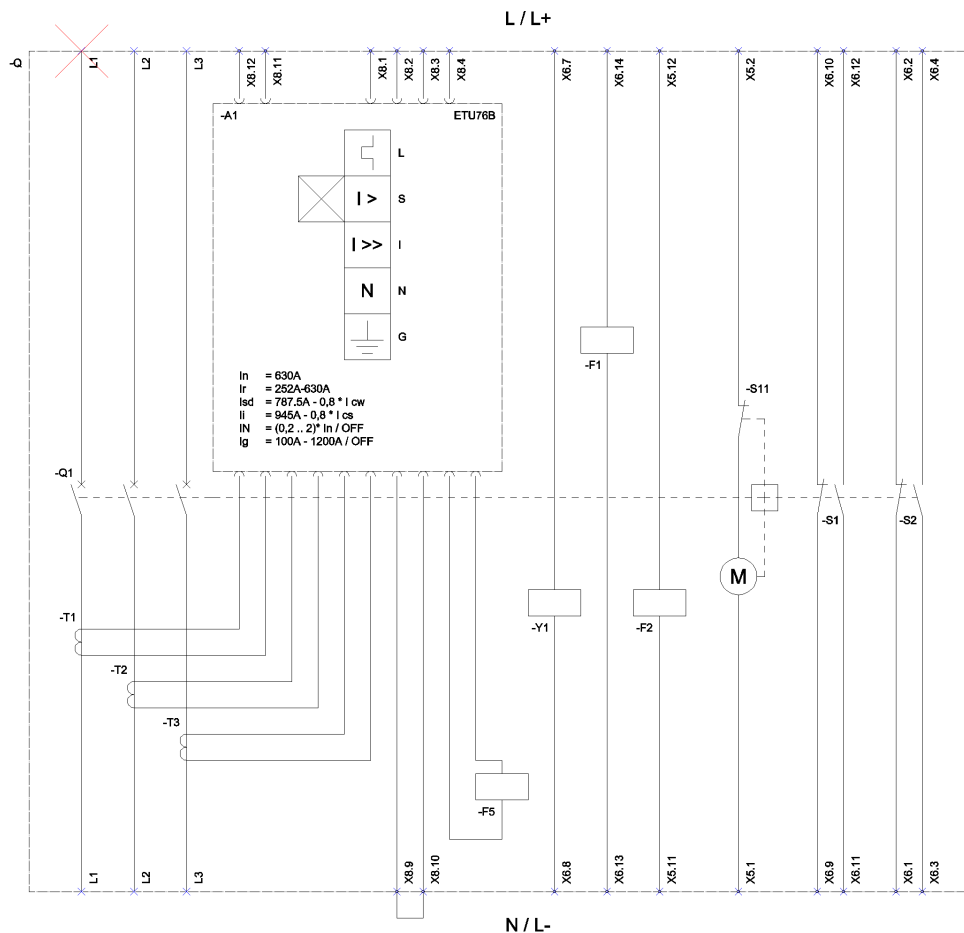

L (Long Time Delay / Überlastschutz); S (Short Time Delay / Kurzschlusschutz, kurzzeitverzögert); I (Instantaneous / Kurzschlusschutz, unverzögert);
 N (Neutral Protection / Neutralleiterschutz); G (Ground Fault Protection / Erdschlussschutz);
 S11 (Internal motor shutdown switch, if spring is tensioned / Interner Motorabstellschalter, wenn Feder gespannt); F1 (1st auxiliary release / Erster Hilfsauslöser);
 F2 (2nd auxiliary release / Zweiter Hilfsauslöser); F5 (Maglatch for trip unit / Auslösemagnet); S1 - S8 (Auxiliary switch / Hilfschalter); Y1 (Closing coil / Einschaltmagnet);

last modified:

3/30/2020

