

withdrawable circuit breaker with guide frame 3-pole, size I, IEC In=630A to 690V, AC50/60Hz Icu=66kA at 500V rear connection horizontal
Overcurrent release ETU 25 LSI protection adjustable 0.4-1 in
Motorized/manual operating mechanism with spring charging motor AC 50/60 Hz 208-240 V or 220-250 V DC Activation AC 50/60 Hz 230 V, 220 V DC without 1st auxiliary release without 2nd auxiliary release 2NO+2NC

Model	
product brand name	SENTRON
product designation	ACB
design of the product	IEC 60947-2
design of the actuating element	Pushbutton
type of the driving mechanism	Manual/motorized operating mechanism with mechanical and electrical closing
type of the driving mechanism / motor drive	Yes
design of the overcurrent release	ETU25B
General technical data	
number of poles	3
size of the circuit-breaker	1
utilization category	B
circuit-breaker / Design	3WL1
Voltage	
Rated insulation voltage Ui	1 000 V
insulation voltage / rated value	1 000 V
operating voltage	
• at AC / at 50/60 Hz / rated value	690 V
Protection class	
protection class IP	IP20
protection class IP / on the front	IP20
protection function of the overcurrent release	LSI
Dissipation	
power loss [W]	
• for rated value of the current / at AC / in hot operating state / per pole	65 W
• maximum	195 W
Current	
operational current	
• at 40 °C / rated value	630 A
• at 45 °C / rated value	630 A
• at 50 °C / rated value	630 A
• at 55 °C / rated value	630 A
• at 60 °C / rated value	630 A
• at 65 °C / rated value	630 A
• at 70 °C / rated value	630 A
continuous current / rated value / maximum	630 A
continuous current / rated value	630 A
adjustable current response value current	
• of the current-dependent overload release / full-scale value	630 A
• of instantaneous short-circuit trip unit / minimum	12 600 A
• of instantaneous short-circuit trip unit / maximum	12 600 A
Main circuit	
operating frequency	
• 1 / rated value	50 Hz

● 2 / rated value		60 Hz				
Auxiliary circuit						
number of NC contacts / for auxiliary contacts		2				
number of NO contacts / for auxiliary contacts		2				
Suitability						
suitability for use		Plant / motor protection				
Adjustable parameters						
adjustable current response value current / of the current-dependent overload release / initial value		252 A				
Product details						
product component						
● trip indicator		Yes				
● voltage trigger		No				
● undervoltage release		No				
design of the auxiliary switch		2 NO + 2 NC				
product extension / optional / motor drive		No				
Product function						
product function						
● grounding protection		No				
● phase failure detection		Yes				
Display and operation						
display version		without display				
Short circuit						
breaking capacity operating short-circuit current (Ics)						
● at 415 V / rated value		66 kA				
● at 500 V / rated value		66 kA				
● at 690 V / rated value		50 kA				
breaking capacity maximum short-circuit current (Icu)						
● at 415 V / rated value		66 kA				
● at 500 V / rated value		66 kA				
● at 690 V / rated value		50 kA				
Connections						
arrangement of electrical connectors / for main current circuit		Main connection rear side horizontal				
type of electrical connection / for main current circuit		busbar connection				
Mechanical Design						
height		460 mm				
width		320 mm				
depth		456 mm				
fastening method		drawer unit				
Environmental conditions						
ambient temperature / during operation						
● minimum		-20 °C				
● maximum		70 °C				
ambient temperature / during storage						
● minimum		-40 °C				
● maximum		70 °C				
General Product Approval		EMC	Declaration of Conformity	Test Certificates		
						
CCC		RCM	EG-Konf.			
Test Certificates		Marine / Shipping				

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)



Marine / Shipping

other

[CCS / China Classification Society](#)



[Miscellaneous](#)

[Environmental Confirmations](#)

[Confirmation](#)

[Miscellaneous](#)

Dangerous Good

[Transport Information](#)

Further information

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1106-3CB36-4AA2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1106-3CB36-4AA2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1106-3CB36-4AA2


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

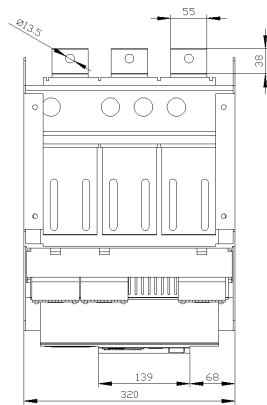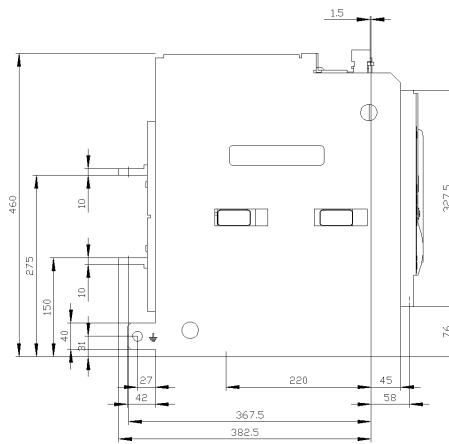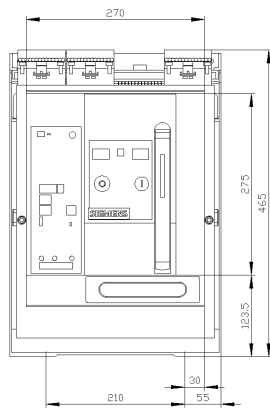

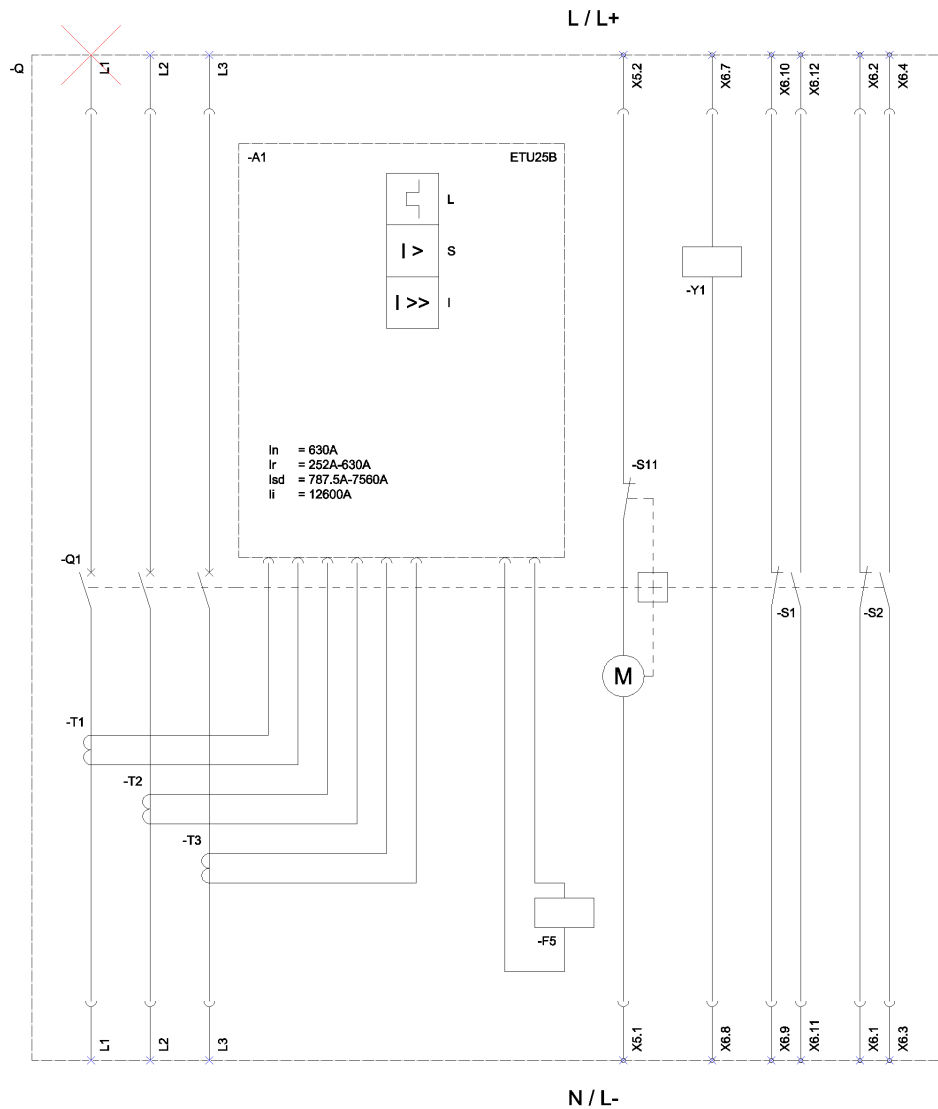

L (Long Time Delay / Überlastschutz); S (Short Time Delay / Kurzschlusschutz, kurzzeitverzögert); I (Instantaneous / Kurzschlusschutz, unverzögert);
 S11 (Internal motor shutdown switch, if spring is tensioned / Interner Motorabstellschalter, wenn Feder gespannt); F5 (Maglatch for trip unit / Auslösemagnet);
 S1 - S8 (Auxiliary switch / Hilfsschalter); Y1 (Closing coil / Einschaltmagnet);

last modified:

3/30/2020

