


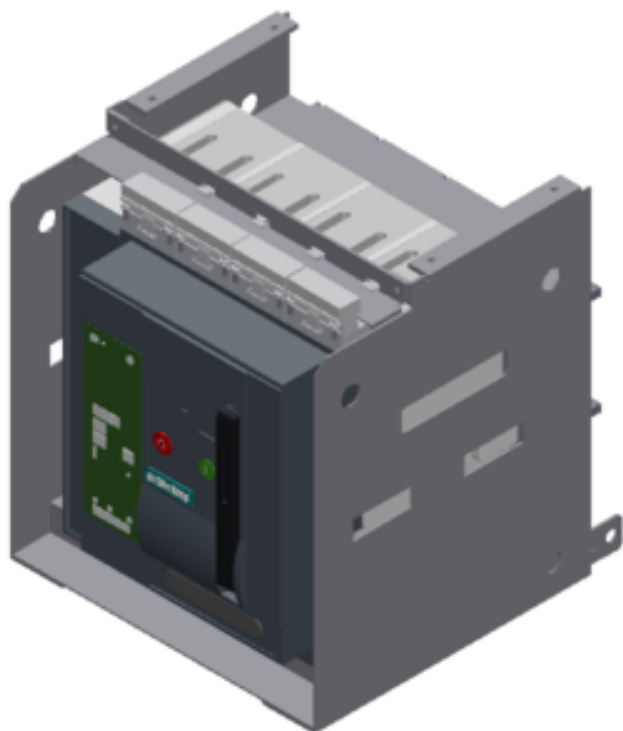

WITHDRAWABLE CIRCUIT BREAKER WITH GUIDE
FRAME 4-POLE, SIZE I, IEC IN=800A TO 690V,
AC50/60HZ ICU=66KA AT 500V REAR CONNECTION
HORIZONTAL

Model		
product brand name		SENTRON
Product designation		ACB
Design of the operating mechanism		Pushbutton
Type of the driving mechanism		Manual operating mechanism with mechanical closing
Type of the driving mechanism / motor drive		No
Design of the overcurrent release		ETU25B

General technical data		
Number of poles		4
Tripping characteristics / Upper tolerance band		AK_3WL_ETU25B_LSI_o
Tripping characteristics / Lower tolerance band		AK_3WL_ETU25B_LSI_u
Size of the circuit-breaker		1
Electrical endurance (switching cycles) / typical		20 000
Usage category		B
circuit-breaker / Design		3WL1108
Mechanical service life (switching cycles) / typical		20 000

Voltage		
---------	--	--

Rated insulation voltage U_i	V	1 000
Insulation voltage / Rated value	V	1 000
Protection class		
Protection class IP		IP20
Protective function of the overcurrent release		LSI
Dissipation		
Active power loss		
• for rated value of the current / at AC / in hot operating state / per pole	W	65
• maximum	W	195
Electricity		
Continuous current / Rated value	A	800
Adjustable response value current		
• of the current-dependent overload release / Full-scale value	A	800
• of the instantaneous short-circuit release / initial value	A	16 000
• of the instantaneous short-circuit release / Full-scale value	A	16 000
Short-time current resistance (I_{cw})		
• limited to 0.5 s / Rated value	kA	66
• limited to 1 s / Rated value	kA	50
• limited to 2 s / Rated value	kA	35
• limited to 3 s / Rated value	kA	29
Main circuit		
Operating frequency		
• 1 / Rated value	Hz	50
• 2 / Rated value	Hz	60
Operating voltage		
• at AC / at 50/60 Hz / Rated value	V	690
Operating current		
• at 40 °C / Rated value	A	800
• at 50 °C / Rated value	A	800
• at 55 °C / Rated value	A	800
• at 60 °C / Rated value	A	800
• at 65 °C / Rated value	A	800
• at 70 °C / Rated value	A	800
Auxiliary circuit		
Number of NC contacts / for auxiliary contacts		4
Number of NO contacts / for auxiliary contacts		4

Suitability		
Suitability for use		Plant / motor protection
Adjustable parameters		
Adjustable response value current / of the current-dependent overload release / initial value	A	320
Product details		
Product component		
• Trip indicator		Yes
• Voltage trigger		Yes
• undervoltage release		No
Product expansion / optional / motor drive		Yes
Product function		
Product function		
• Ground fault protection		No
• Phase failure detection		Yes
Display and operation		
Display version		without display
Short circuit		
Operational short-circuit current breaking capacity (Ics)		
• at 415 V / Rated value	kA	66
• at 500 V / Rated value	kA	66
• at 690 V / Rated value	kA	50
Maximum short-circuit current breaking capacity (Icu)		
• at 415 V / Rated value	kA	66
• at 500 V / Rated value	kA	66
• at 690 V / Rated value	kA	50
Short-circuit current making capacity (Icm)		
• at 415 V / Rated value	kA	145
• at 500 V / Rated value	kA	145
• at 690 V / Rated value	kA	105
Connections		
Arrangement of electrical connectors / for main current circuit		Main terminal on the rear horizontal
Type of electrical connection / for main current circuit		busbar connection
Mechanical Design		
Height	mm	460
Width	mm	410
Depth	mm	456
Mounting type		drawer unit

Environmental conditions

Ambient temperature

• during operation / minimum	°C	-20
• during operation / maximum	°C	70
• during storage / minimum	°C	-40
• during storage / maximum	°C	70

Certificates

Equipment marking

• acc. to DIN EN 61346-2	Q
• acc. to DIN EN 81346-2	Q

General Product Approval

Declaration of Conformity

Test Certificates

CB

CB



CCC



VDE

EAC



EG-Konf.

[spezielle
Prüfbescheinigunge
n](#)

Test Certificates

Shipping Approval

[sonstig](#)



ABS



BUREAU
VERITAS



DNV



GL



LRS

Shipping Approval

other



PRS



RMRS

[Umweltbestätigung](#)

[sonstig](#)

Further information

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3WL11083CB461FA4>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3WL11083CB461FA4/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL11083CB461FA4

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

last modified:

14.08.2015