

Draw-out circuit breaker with slide-in module frame 3-pole, Size 1, IEC In=1000 A up to 690 V, 50/60 Hz AC Icu=66 kA at 500 V Rear horizontal connection Overcurrent release ETU 15 LI protection adjustable 0.5-1 in With manual operating mechanism with storage with mechanical request With 1st auxiliary release Shunt release "F", F1 50/60 Hz 230 V AC/220 V DC, 100% on-load factor without 2nd auxiliary release 4NO+4NC C22= Ready indicator K07= Tripped signaling contact, 1 CO not possible with option F02 R16= Position signaling switch, withdrawable part 6 changeover contacts R21= Shutter 2-part can be locked with padlock

### Further information

#### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

#### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1110-3BB66-1GA4-Z C22+K07+R16+R21>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1110-3BB66-1GA4-Z C22+K07+R16+R21>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3WL1110-3BB66-1GA4-Z C22+K07+R16+R21](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1110-3BB66-1GA4-Z C22+K07+R16+R21)

#### CAX-Online-Generator

<http://www.siemens.com/cax>

#### Tender specifications

<http://www.siemens.com/specifications>

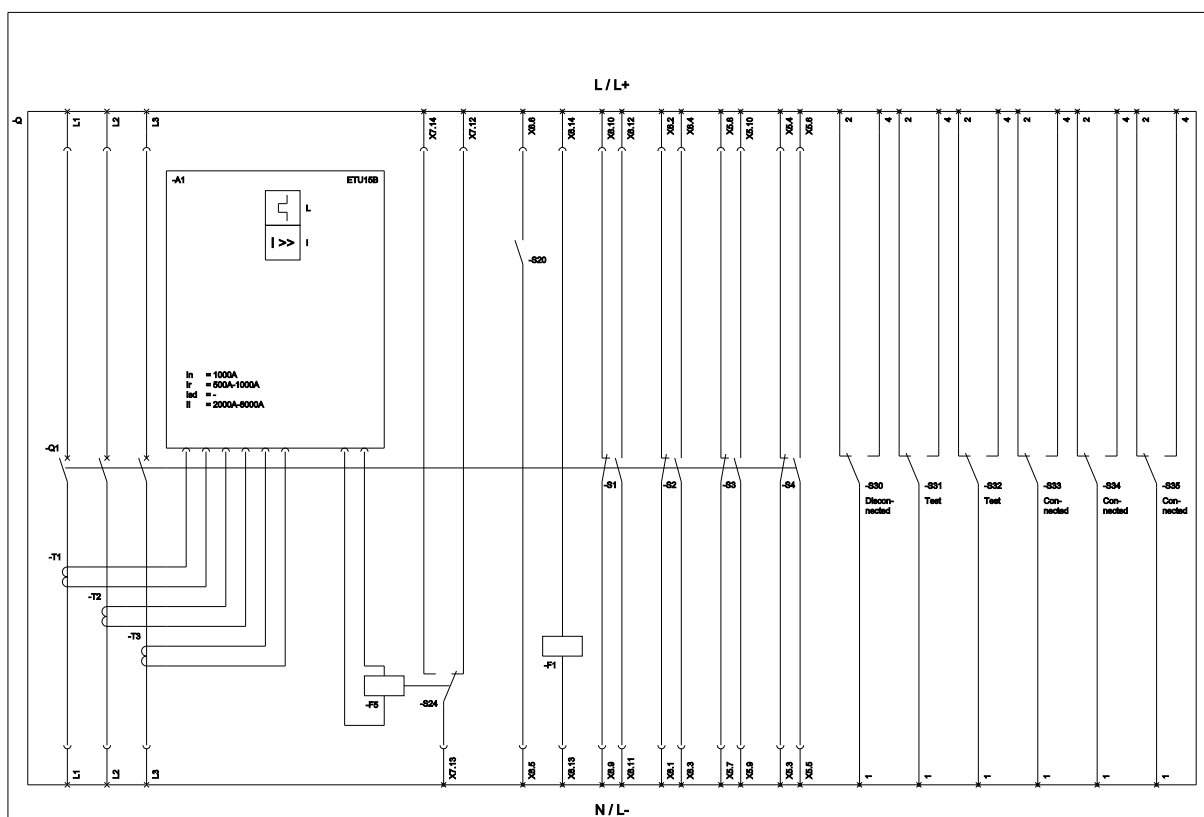

L (Long Time Delay / Overload release), T (Instantaneous / Thermal release, unadjustable), F1 (1st auxiliary release / Shutter 2-part), F2 (Magnet for trip unit / Auxiliary magnet), R1 - R6 (Auxiliary switch / 2-position switch), S20 (Ready to close signaling switch / Shutter 2-part), S24 (1st trip signaling switch K07 (Rest position) / Shutter 2-part), S27 (Rest position);



