

Draw-out circuit breaker with slide-in module frame 3-pole, Size 1, IEC In=1000 A up to 690 V, 50/60 Hz AC Icu=85 kA at 500 V with connecting flange Overcurrent release ETU 25 LSI protection adjustable 0.4-1 in With manual operating mechanism with storage with mechanical request With 1st auxiliary release Shunt release "F", F1 50/60 Hz 230 V AC/220 V DC, 100% on-load factor With 2nd auxiliary release "R", F3 Undervoltage, instant. 208-240 V AC, 220-250 V DC 2NO+2NC A08= Tin plating of customer terminals in slide-in unit frame for horizontal connection or flange connection K07= Tripped signaling contact, 1 CO not possible with option F02 R15= Position signaling switch, withdrawable part 3 changeover contacts T40= Door sealing frame

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1110-4CB68-1GN2-Z A08+K07+R15+T40>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1110-4CB68-1GN2-Z A08+K07+R15+T40>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1110-4CB68-1GN2-Z A08+K07+R15+T40


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

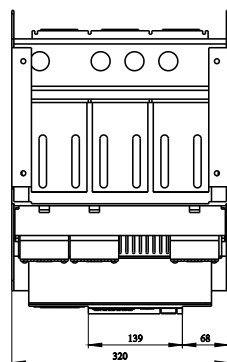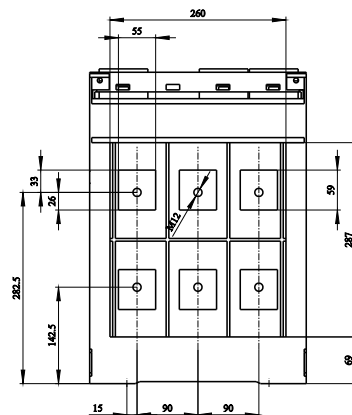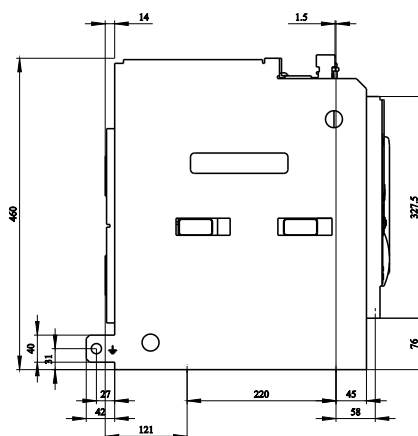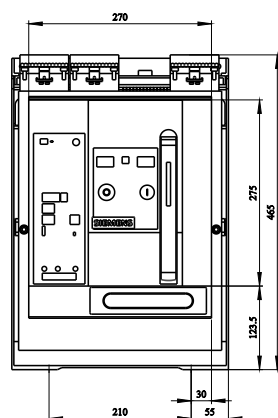

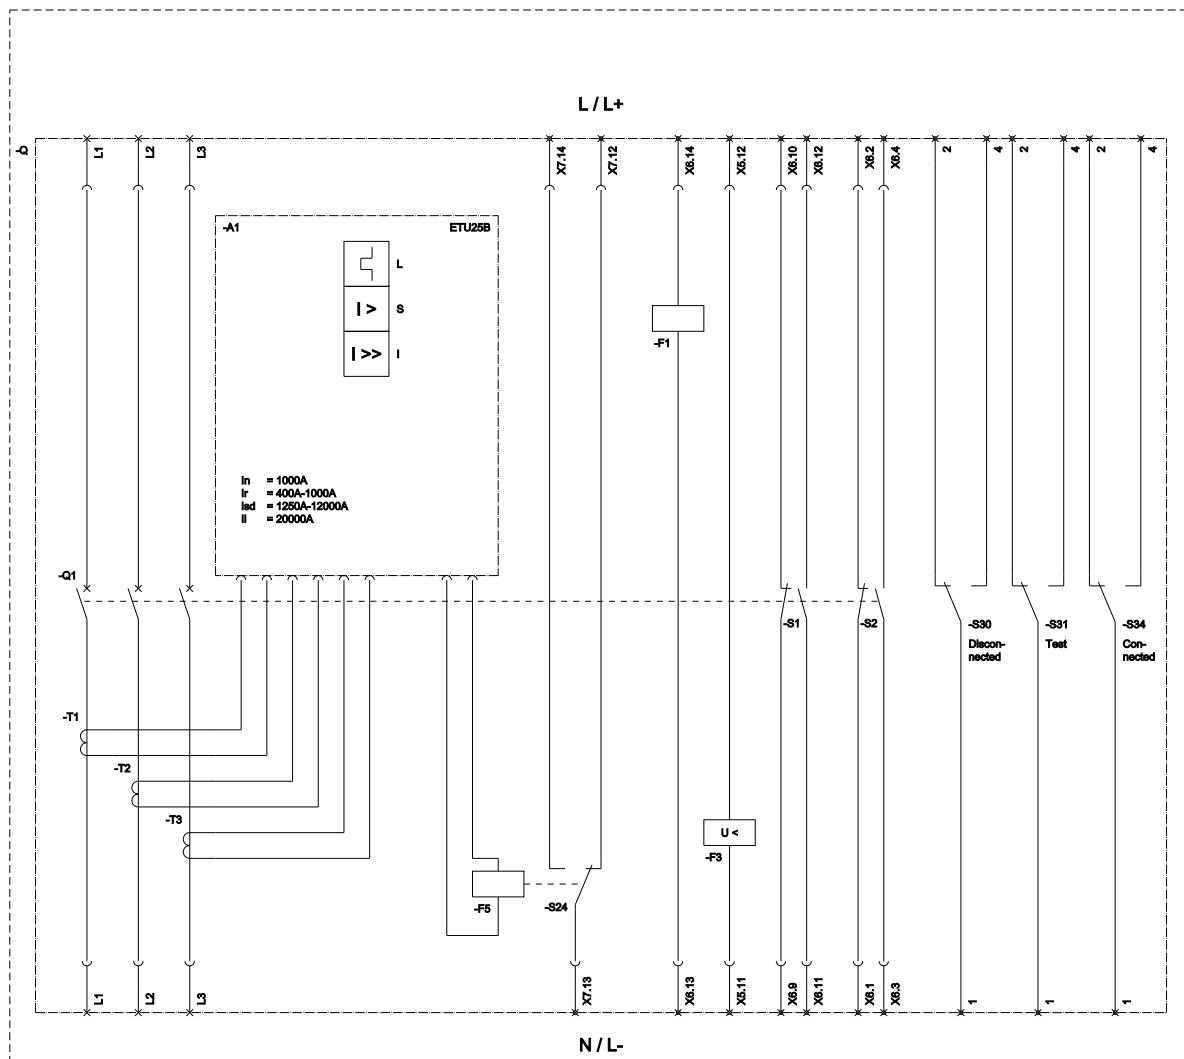

L (Long Time Delay / Überlastschutz); S (Short Time Delay / Kurzschlussschutz, kurzzeitverzögerter); I (Instantaneous / Kurzschlussschutz, unverzögerter); F1 (1st auxiliary release / Erster Hilfsauslöser);
 F3 (Undervoltage release / Unterspannungsauslöser); F5 (Maglatch for trip unit / Auslöseverriegelung); S1 - S8 (Auxiliary switch / Hilfschalter);
 S24 (1st trip signalling switch K07 (Reset position) / Erster Ausgabelöschschalter K07 (Reset Position));

last modified:

1/23/2025

