


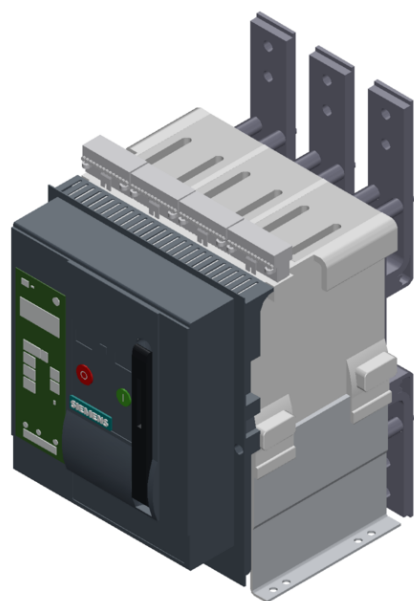

fixed-mounted circuit breaker 3-pole, size I, IEC In=1250A to 690V, AC50/60Hz Icu=66kA at 500V frnt.conn. top/bot. dual-hole
Overcurrent release ETU 45 LSIN protection adjustable 0.4-1 in with cubicle bus Opt.: Comm. /measuring func./ground fault/ ZSS
Motorized/manual operating mechanism with memory Drive motor 24-30 V DC Activation 24 V DC without 1st auxiliary release With 2nd auxiliary release "R", F3 Undervoltage, instant. 24 V DC 2NO+2NC
C22= Ready indicator K07= Tripped signaling contact, 1 CO not possible with option F02 N61= Cage spring connections for auxiliary S07= Locking device in OFF position w. 4 bracket locks (safe OFF/disconnector functionality) Disconnector condition IEC 60947-2

Model	
Product brand name	SENTRON
Product designation	ACB
Design of the product	IEC 60947-2
Design of the auxiliary switch	2 NO + 2 NC
Design of the operating mechanism	Pushbutton

Type of the driving mechanism	Manual/motorized operating mechanism with mechanical and electrical closing
Type of the driving mechanism / motor drive	Yes
Design of the overcurrent release	ETU45B

General technical data

Number of poles	3
Size of the circuit-breaker	1
Usage category	B
circuit-breaker / Design	3WL1

Voltage

Rated insulation voltage U_i	1 000 V
--------------------------------	---------

Protection class

Protection class IP	IP20
Protection class IP / on the front	IP20
Protective function of the overcurrent release	LSIN

Dissipation

Power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	35 W
---	------

Electricity

Operating current / at 45 °C / rated value	1 250 A
Continuous current / rated value	1 250 A
Adjustable pick-up value current	
• of the current-dependent overload release / Full-scale value	1 250 A
• of instantaneous short-circuit trip unit / initial value	1 875 A
• of instantaneous short-circuit trip unit / Full-scale value	15 000 A

Main circuit

Operating frequency	
• 1 / rated value	50 Hz
• 2 / rated value	60 Hz
Operating voltage	
• at AC / at 50/60 Hz / rated value	690 V
Operating current	
• at 40 °C / rated value	1 250 A
• at 50 °C / rated value	1 250 A
• at 55 °C / rated value	1 250 A
• at 60 °C / rated value	1 250 A
• at 65 °C / rated value	1 250 A
• at 70 °C / rated value	1 210 A

Auxiliary circuit	
Number of NC contacts / for auxiliary contacts	2
Number of NO contacts / for auxiliary contacts	2
Suitability	
Suitability for use	Plant / motor protection
Adjustable parameters	
Adjustable pick-up value current	
• of the L-trip / with I4t characteristic / initial value	500 A
• of the L-trip / with I4t characteristic / Full-scale value	1 250 A
Adjustable pick-up value current / of the current-dependent overload release / initial value	500 A
Product details	
Product component	
• Trip indicator	Yes
• Voltage trigger	No
• undervoltage release	Yes
Product extension / optional / motor drive	No
Product function	
Product function	
• Ground fault protection	No
• Phase failure detection	Yes
Display and operation	
Display version	without display
Short circuit	
Operational short-circuit current breaking capacity (Ics)	
• at 415 V / rated value	66 kA
• at 500 V / rated value	66 kA
• at 690 V / rated value	50 kA
Maximum short-circuit current breaking capacity (Icu)	
• at 415 V / rated value	66 kA
• at 500 V / rated value	66 kA
• at 690 V / rated value	50 kA
Connections	
Arrangement of electrical connectors / for main current circuit	Main connection top front/bottom double hole
Type of electrical connection / for main current circuit	busbar connection
Mechanical Design	
Height	541 mm

Width	320 mm
Depth	374 mm
Mounting type	fixed mounting

Environmental conditions

Ambient temperature

- during operation / minimum -20 °C
- during operation / maximum 70 °C
- during storage / minimum -40 °C
- during storage / maximum 70 °C

Certificates

Reference code

- acc. to DIN EN 61346-2 Q
- acc. to DIN EN 81346-2 Q

General Product Approval	Declaration of Conformity	Test Certificates
 CB	 CCC	 VDE
 EG-Konf.	Special Test Certificate	Miscellaneous

Shipping Approval



Shipping Approval	other
 RMRS	Environmental Confirmations
	Manufacturer Declaration
	Miscellaneous

Further information

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1112-3EB34-6AJ2-Z C22+K07+N61+S07>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1112-3EB34-6AJ2-Z C22+K07+N61+S07>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1112-3EB34-6AJ2-Z C22+K07+N61+S07

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

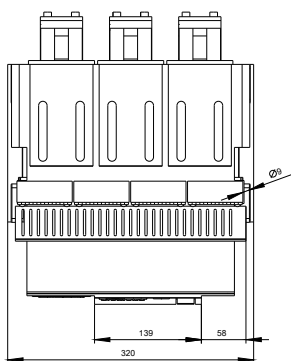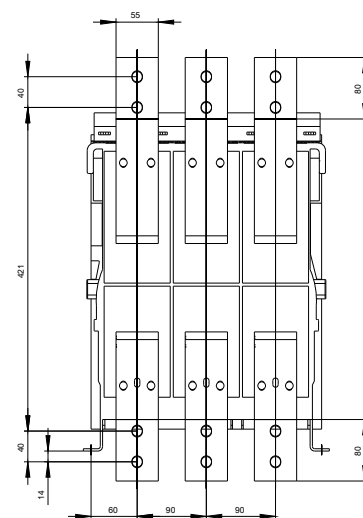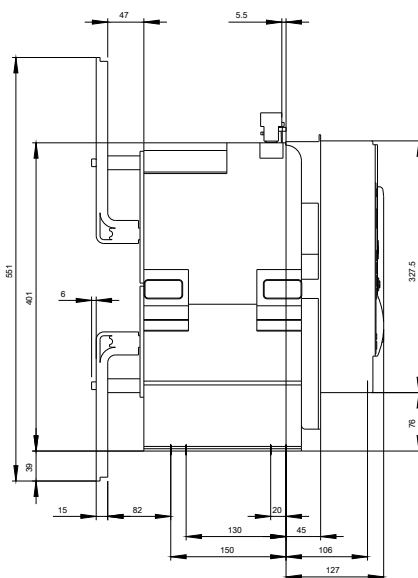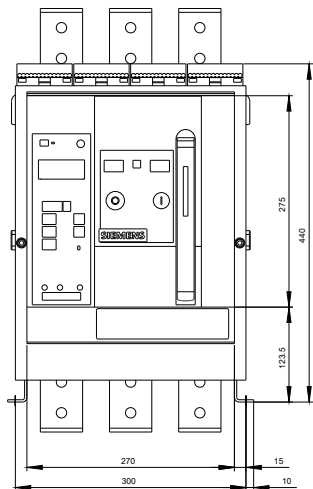

last modified:

03/14/2019