

withdrawable circuit breaker with guide frame 3-pole, size i, IEC
In=1250A to 690V, AC50/60Hz Icu=66kA at 500V rear connection
horizontal Overcurrent release ETU 45 LSIN protection adjustable
0.4-1 in with cubicle bus Opt.: Comm. /measuring func./ground fault/
ZSS Motorized/manual operating mechanism with spring charging
motor AC 50/60 Hz 208-240 V or 220-250 V DC Activation AC 50/60
Hz 230 V, 220 V DC With 1st auxiliary release Shunt release "F", F1
50/60 Hz 230 V AC/220 V DC, 100% on-load factor without 2nd
auxiliary release 4NO+4NC T40= Door sealing frame



Model	
Product brand name	SENTRON
Product designation	ACB
Design of the auxiliary switch	4 NO + 4 NC
Design of the product	IEC 60947-2
Design of the operating mechanism	Pushbutton

Type of the driving mechanism	Manual/motorized operating mechanism with mechanical and electrical closing
Type of the driving mechanism / motor drive	Yes
Design of the overcurrent release	ETU45B

General technical data

Number of poles	3
Size of the circuit-breaker	1
Usage category	B
circuit-breaker / Design	3WL1

Voltage

Rated insulation voltage U_i	1 000 V
--------------------------------	---------

Protection class

Protection class IP	IP20
Protective function of the overcurrent release	LSIN

Dissipation

Power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	68.3 W
---	--------

Electricity

Operating current / at 45 °C / rated value	1 250 A
Continuous current / rated value	1 250 A
Adjustable pick-up value current	
• of the current-dependent overload release / Full-scale value	1 250 A
• of instantaneous short-circuit trip unit / initial value	1 875 A
• of instantaneous short-circuit trip unit / Full-scale value	15 000 A

Main circuit

Operating frequency	
• 1 / rated value	50 Hz
• 2 / rated value	60 Hz
Operating voltage	
• at AC / at 50/60 Hz / rated value	690 V
Operating current	
• at 40 °C / rated value	1 250 A
• at 50 °C / rated value	1 250 A
• at 55 °C / rated value	1 250 A
• at 60 °C / rated value	1 250 A
• at 65 °C / rated value	1 250 A
• at 70 °C / rated value	1 210 A

Auxiliary circuit	
Number of NC contacts / for auxiliary contacts	4
Number of NO contacts / for auxiliary contacts	4
Suitability	
Suitability for use	Plant / motor protection
Adjustable parameters	
Adjustable pick-up value current	
• of the L-trip / with I4t characteristic / initial value	500 A
• of the L-trip / with I4t characteristic / Full-scale value	1 250 A
Adjustable pick-up value current / of the current-dependent overload release / initial value	500 A
Product details	
Product component	
• Trip indicator	Yes
• Voltage trigger	Yes
• undervoltage release	No
Product extension / optional / motor drive	No
Product function	
Product function	
• Ground fault protection	No
• Phase failure detection	Yes
Display and operation	
Display version	without display
Short circuit	
Operational short-circuit current breaking capacity (Ics)	
• at 415 V / rated value	66 kA
• at 500 V / rated value	66 kA
• at 690 V / rated value	50 kA
Maximum short-circuit current breaking capacity (Icu)	
• at 415 V / rated value	66 kA
• at 500 V / rated value	66 kA
• at 690 V / rated value	50 kA
Connections	
Arrangement of electrical connectors / for main current circuit	Main connection rear side horizontal
Type of electrical connection / for main current circuit	busbar connection
Mechanical Design	
Height	460 mm

Width	320 mm
Depth	456 mm
Mounting type	drawer unit

Environmental conditions

Ambient temperature	-20 ... +70 °C
	-40 ... +70 °C

Certificates

Reference code

- acc. to DIN EN 61346-2
- acc. to DIN EN 81346-2

Q
Q

General Product Approval

Declaration of Conformity

Test Certificates



CCC

CB

CB



VDE



EG-Konf.

[Miscellaneous](#)

[Special Test Certificate](#)

Shipping Approval



ABS



BUREAU
VERITAS



LRS



PRS



RMRS

[CCS / China Classification Society](#)

other

[Environmental Conformations](#)

[Manufacturer Declaration](#)

[Confirmation](#)

[Miscellaneous](#)

Further information

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1112-3EB36-4GA4-Z T40>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1112-3EB36-4GA4-Z T40>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1112-3EB36-4GA4-Z T40


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

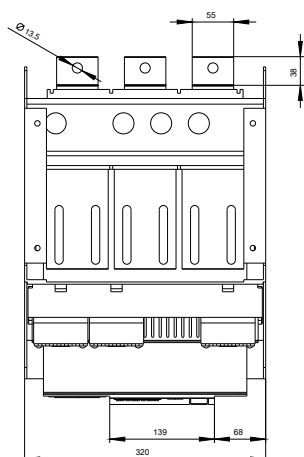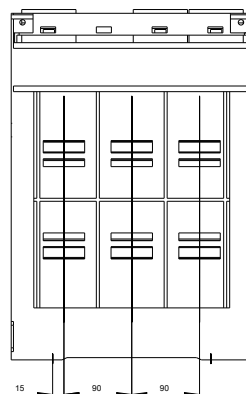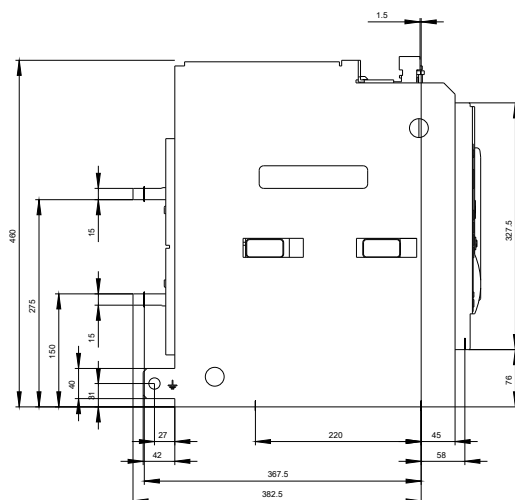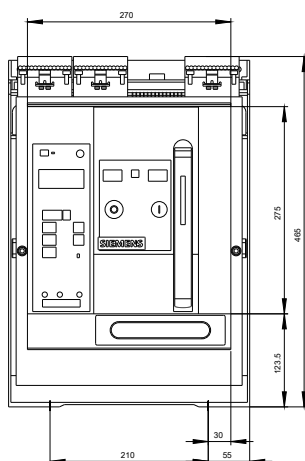

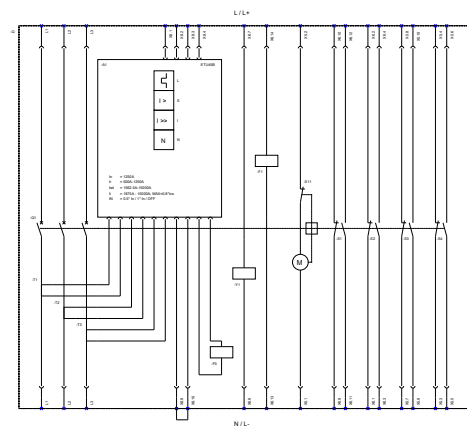

1. 2-way Time Delay (On-delay) (2-Wege Zeitverzögerung (mit Vorlaufzeit)) 2. 2-way Time Delay (Off-delay) (2-Wege Zeitverzögerung (mit Nachlaufzeit)) 3. 2-way Time Delay (On-delay) (2-Wege Zeitverzögerung (mit Vorlaufzeit)) 4. 2-way Time Delay (Off-delay) (2-Wege Zeitverzögerung (mit Nachlaufzeit)) 5. 2-way Time Delay (On-delay) (2-Wege Zeitverzögerung (mit Vorlaufzeit))

last modified:

03/24/2020