

fixed-mounted circuit breaker 3-pole, size I, IEC In=1600A to 690V, AC50/60Hz Icu=55kA at 500V frnt.conn. top/bot. single-hole
Overcurrent release ETU 25 LSI protection adjustable 0.4-1 in
Motorized/manual operating mechanism with spring charging motor
AC 50/60 Hz 208-240 V or 220-250 V DC Activation AC 50/60 Hz 230 V, 220 V DC without 1st auxiliary release With 2nd auxiliary release "R", F3 Undervoltage, instant. 110-127 V AC, 110-125 V DC 2NO+2NC



Model	
Product brand name	SETRON
Product designation	ACB
Design of the auxiliary switch	2 NO + 2 NC
Design of the product	IEC 60947-2
Design of the operating mechanism	Pushbutton

Type of the driving mechanism	Manual/motorized operating mechanism with mechanical and electrical closing
Type of the driving mechanism / motor drive	Yes
Design of the overcurrent release	ETU25B

General technical data

Number of poles	3
Size of the circuit-breaker	1
Usage category	B
circuit-breaker / Design	3WL1

Voltage

Rated insulation voltage U_i	1 000 V
--------------------------------	---------

Protection class

Protection class IP	IP20
Protection class IP / on the front	IP20
Protective function of the overcurrent release	LSI

Dissipation

Power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	50 W
---	------

Electricity

Operating current / at 45 °C / rated value	1 600 A
Continuous current / rated value	1 600 A
Adjustable pick-up value current	
• of the current-dependent overload release / Full-scale value	1 600 A
• of instantaneous short-circuit trip unit / initial value	32 000 A
• of instantaneous short-circuit trip unit / Full-scale value	32 000 A

Main circuit

Operating frequency	
• 1 / rated value	50 Hz
• 2 / rated value	60 Hz
Operating voltage	
• at AC / at 50/60 Hz / rated value	690 V
Operating current	
• at 40 °C / rated value	1 600 A
• at 50 °C / rated value	1 600 A
• at 55 °C / rated value	1 600 A
• at 60 °C / rated value	1 600 A
• at 65 °C / rated value	1 600 A
• at 70 °C / rated value	1 490 A

Auxiliary circuit	
Number of NC contacts / for auxiliary contacts	2
Number of NO contacts / for auxiliary contacts	2
Suitability	
Suitability for use	Plant / motor protection
Adjustable parameters	
Adjustable pick-up value current / of the current-dependent overload release / initial value	640 A
Product details	
Product component	
• Trip indicator	Yes
• Voltage trigger	No
• undervoltage release	Yes
Product extension / optional / motor drive	No
Product function	
Product function	
• Ground fault protection	No
• Phase failure detection	Yes
Display and operation	
Display version	without display
Short circuit	
Operational short-circuit current breaking capacity (Ics)	
• at 415 V / rated value	55 kA
• at 500 V / rated value	55 kA
• at 690 V / rated value	42 kA
Maximum short-circuit current breaking capacity (Icu)	
• at 415 V / rated value	55 kA
• at 500 V / rated value	55 kA
• at 690 V / rated value	42 kA
Connections	
Arrangement of electrical connectors / for main current circuit	Main connection top front/bottom single hole
Type of electrical connection / for main current circuit	busbar connection
Mechanical Design	
Height	462 mm
Width	320 mm
Depth	374 mm
Mounting type	fixed mounting

Environmental conditions

Ambient temperature

-20 ... +70 °C

-40 ... +70 °C

Certificates

Reference code

- acc. to DIN EN 61346-2
- acc. to DIN EN 81346-2

Q

Q

General Product Approval

Declaration of Conformity

Test Certificates



CCC

CB

CB



VDE



EG-Konf.

[Special Test Certificate](#)

[Miscellaneous](#)

Shipping Approval



ABS



BUREAU
VERITAS



LRS



PRS



RMRS

[CCS / China Classification Society](#)

other

[Environmental Confirmations](#)

[Manufacturer Declaration](#)

[Confirmation](#)

[Miscellaneous](#)

Further information

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1116-2CB33-4AM2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1116-2CB33-4AM2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1116-2CB33-4AM2


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

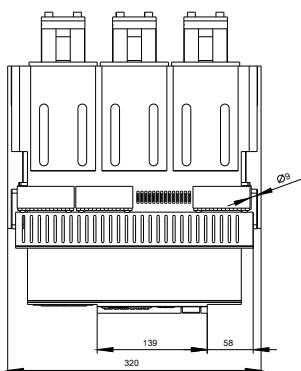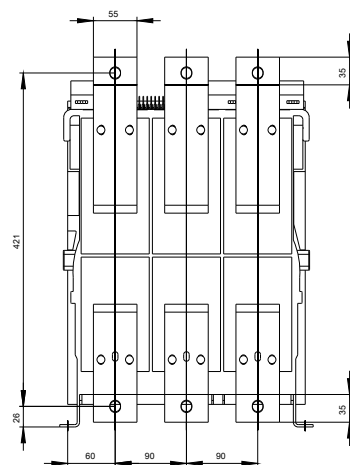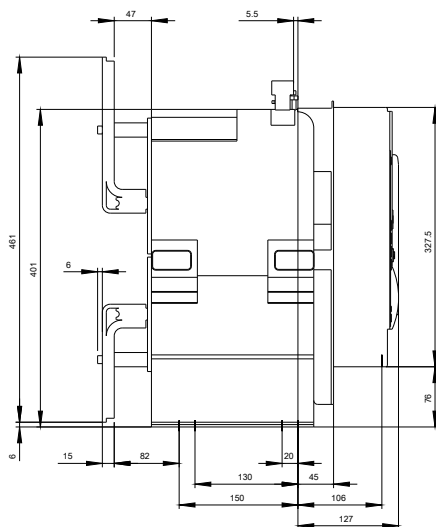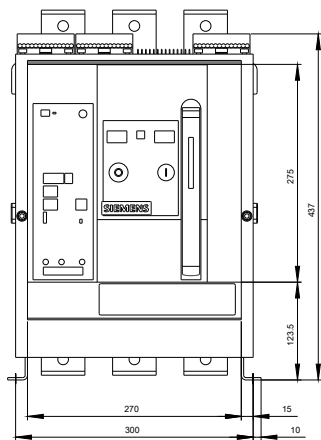

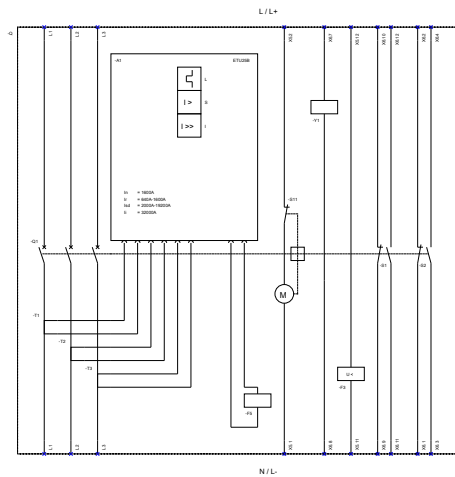

1. 2-pole Time delay / 2-pole (Zeitverzögerung) / 2-pole (Zeitverzögerung) / 2-pole (Zeitverzögerung) / 2-pole (Zeitverzögerung)
 2. 1-pole Time delay / 1-pole (Zeitverzögerung) / 1-pole (Zeitverzögerung) / 1-pole (Zeitverzögerung) / 1-pole (Zeitverzögerung)
 3. 1-pole Instantaneous / 1-pole (Sofort) / 1-pole (Sofort) / 1-pole (Sofort) / 1-pole (Sofort)
 4. 1-pole Instantaneous / 1-pole (Sofort) / 1-pole (Sofort) / 1-pole (Sofort) / 1-pole (Sofort)
 5. 1-pole Instantaneous / 1-pole (Sofort) / 1-pole (Sofort) / 1-pole (Sofort) / 1-pole (Sofort)
 6. 1-pole Instantaneous / 1-pole (Sofort) / 1-pole (Sofort) / 1-pole (Sofort) / 1-pole (Sofort)
 7. 1-pole Instantaneous / 1-pole (Sofort) / 1-pole (Sofort) / 1-pole (Sofort) / 1-pole (Sofort)
 8. 1-pole Instantaneous / 1-pole (Sofort) / 1-pole (Sofort) / 1-pole (Sofort) / 1-pole (Sofort)
 9. 1-pole Instantaneous / 1-pole (Sofort) / 1-pole (Sofort) / 1-pole (Sofort) / 1-pole (Sofort)
 10. 1-pole Instantaneous / 1-pole (Sofort) / 1-pole (Sofort) / 1-pole (Sofort) / 1-pole (Sofort)

last modified:

01/21/2020