

fixed-mounted circuit breaker 3-pole, size II, IEC In=800A to 690V, AC50/60Hz Icu=80kA at 500V frnt.conn. top/bot. dual-hole Overcurrent release ETU 27 LSING protection adjustable 0.4-1 in Ground fault/N protection integrated With manual operating mechanism with storage with electrical + mechanical request 50/60 Hz 230 V AC, 220 V DC With 1st auxiliary release Shunt release "F", F1 50/60 Hz 230 V AC/220 V DC, 100% on-load factor With 2nd auxiliary release "R", F3 Undervoltage, instant. 208-240 V AC, 220-250 V DC 2NO+2NC

Model	
product brand name	SENTRON
product designation	ACB
design of the product	IEC 60947-2
design of the actuating element	Pushbutton
type of the driving mechanism	Manual operating mechanism with mechanical and electrical closing
type of the driving mechanism / motor drive	No
design of the overcurrent release	ETU27B
General technical data	
number of poles	3
size of the circuit-breaker	2
utilization category	B
circuit-breaker / Design	3WL1
Voltage	
Rated insulation voltage Ui	1 000 V
insulation voltage / rated value	1 000 V
operating voltage	
• at AC / at 50/60 Hz / rated value	690 V
Protection class	
protection class IP	IP20
protection class IP / on the front	IP20
protection function of the overcurrent release	LSING
Dissipation	
power loss [W]	
• for rated value of the current / at AC / in hot operating state / per pole	13.3 W
• maximum	40 W
Current	
operational current	
• at 40 °C / rated value	800 A
• at 45 °C / rated value	800 A
• at 50 °C / rated value	800 A
• at 55 °C / rated value	800 A
• at 60 °C / rated value	800 A
• at 65 °C / rated value	800 A
• at 70 °C / rated value	800 A
continuous current / rated value / maximum	800 A
continuous current / rated value	800 A
adjustable current response value current	
• of the current-dependent overload release / full-scale value	800 A
• of instantaneous short-circuit trip unit / minimum	16 000 A
• of instantaneous short-circuit trip unit / maximum	16 000 A
Main circuit	
operating frequency	

• 1 / rated value • 2 / rated value	50 Hz 60 Hz		
Auxiliary circuit			
number of NC contacts / for auxiliary contacts	2		
number of NO contacts / for auxiliary contacts	2		
Suitability			
suitability for use	Plant / motor protection		
Adjustable parameters			
adjustable current response value current / of the current-dependent overload release / initial value	320 A		
Product details			
product component			
• trip indicator • voltage trigger • undervoltage release	Yes Yes Yes		
design of the auxiliary switch	2 NO + 2 NC		
product extension / optional / motor drive	Yes		
Product function			
product function			
• grounding protection • phase failure detection	Yes Yes		
Display and operation			
display version	without display		
Short circuit			
breaking capacity operating short-circuit current (Ics)			
• at 415 V / rated value • at 500 V / rated value • at 690 V / rated value	80 kA 80 kA 75 kA		
breaking capacity maximum short-circuit current (Icu)			
• at 415 V / rated value • at 500 V / rated value • at 690 V / rated value	80 kA 80 kA 75 kA		
Connections			
arrangement of electrical connectors / for main current circuit	Main connection top front/bottom double hole		
type of electrical connection / for main current circuit	busbar connection		
Mechanical Design			
height	507 mm		
width	460 mm		
depth	369 mm		
fastening method	fixed mounting		
Environmental conditions			
ambient temperature / during operation			
• minimum • maximum	-20 °C 70 °C		
ambient temperature / during storage			
• minimum • maximum	-40 °C 70 °C		
General Product Approval		EMC	Declaration of Conformity
			Test Certificates
    UK Declaration of Conformity Type Test Certificates/Test Report			
Test Certificates		Marine / Shipping	

[Special Test Certificate](#)

[Miscellaneous](#)



Marine / Shipping

other

[CCS / China Classification Society](#)



[Miscellaneous](#)

[Environmental Confirmations](#)

[Confirmation](#)

[Miscellaneous](#)

Dangerous Good

[Transport Information](#)

Further information

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1208-3DG34-3GN2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1208-3DG34-3GN2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1208-3DG34-3GN2


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

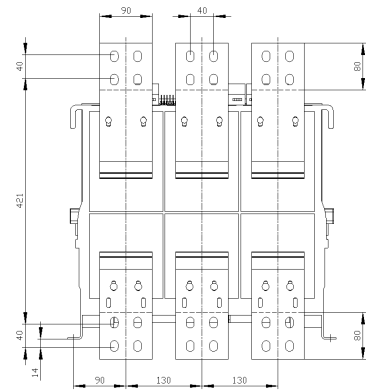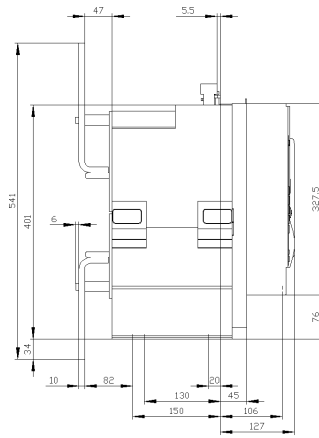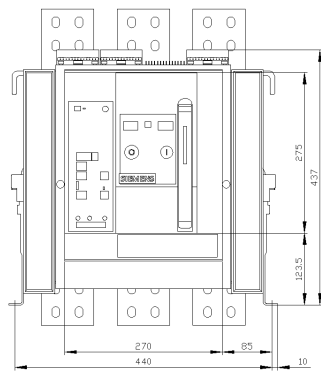

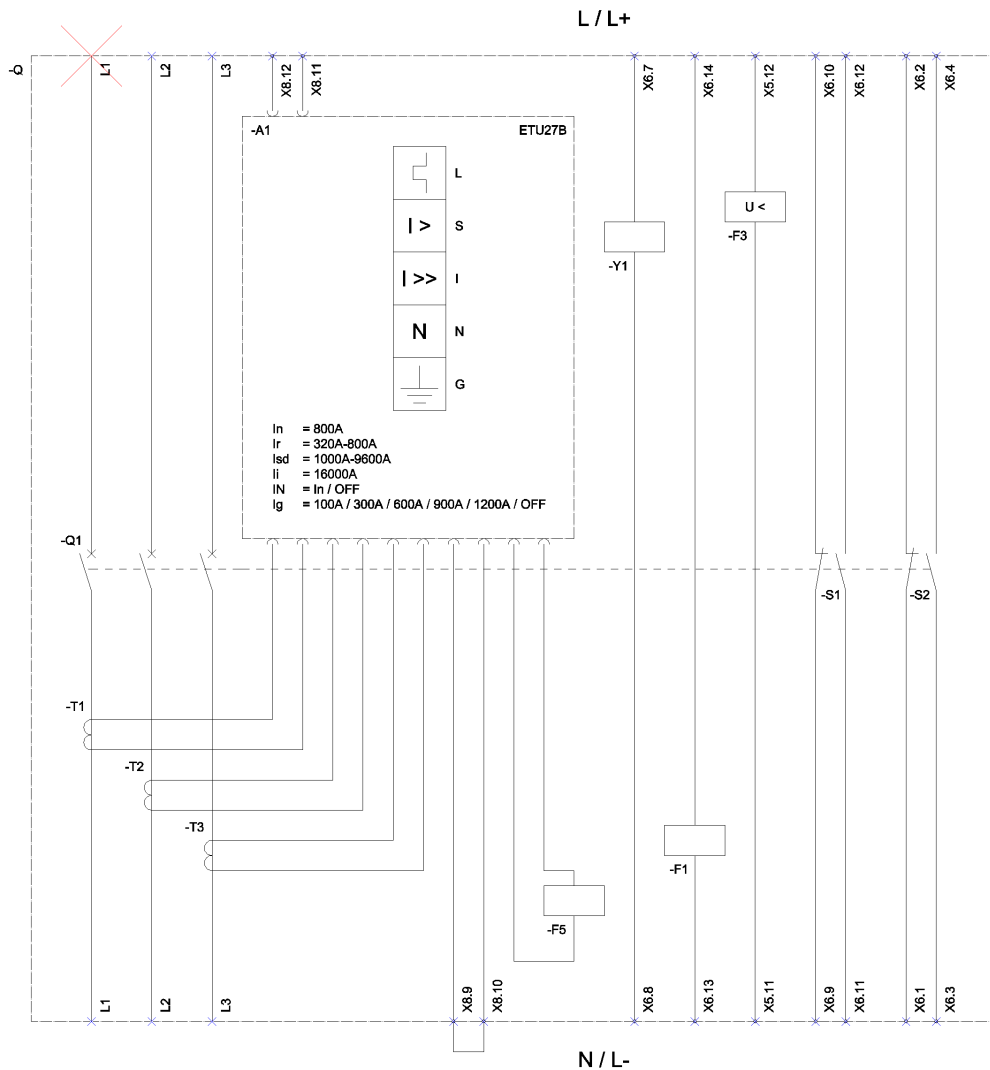

L (Long Time Delay / Überlastschutz); S (Short Time Delay / Kurzschlusschutz, kurzzeitverzögert); I (Instantaneous / Kurzschlusschutz, unverzögert);
 N (Neutral Protection / Neutralleiterschutz); G (Ground Fault Protection / Erdschlussschutz); F1 (1st auxiliary release / Erster Hilfsauslöser);
 F3 (Undervoltage release / Unterspannungsauslöser); F5 (Maglatch for trip unit / Auslösemagnet); S1 - S8 (Auxiliary switch / Hilfsschalter);
 Y1 (Closing coil / Einschaltmagnet);

last modified:

4/6/2020

