

withdrawable circuit breaker with guide frame 3-pole, size II, IEC In=1000A to 690V, AC50/60Hz Icu=80kA at 500V rear connection horizontal
Overcurrent release ETU45 LSIN protection adjustable 0.4-1 in with display and cubicle bus Opt.: Comm. /measuring func./ground fault/ ZSS
Motorized/manual operating mechanism with spring charging motor AC 50/60 Hz 208-240 V or 220-250 V DC Activation AC 50/60 Hz 230 V, 220 V DC With 1st auxiliary release Shunt release "F", F1 50/60 Hz 230 V AC/220 V DC, 100% on-load factor without 2nd auxiliary release 2NO+2NC

Model	
product brand name	SENTRON
product designation	ACB
design of the product	IEC 60947-2
design of the actuating element	Pushbutton
type of the driving mechanism	Manual/motorized operating mechanism with mechanical and electrical closing
type of the driving mechanism / motor drive	Yes
design of the overcurrent release	ETU45B
General technical data	
number of poles	3
size of the circuit-breaker	2
utilization category	B
circuit-breaker / Design	3WL1
Voltage	
Rated insulation voltage Ui	1 000 V
insulation voltage / rated value	1 000 V
operating voltage	
• at AC / at 50/60 Hz / rated value	690 V
Protection class	
protection class IP	IP20
protection class IP / on the front	IP20
protection function of the overcurrent release	LSIN
Dissipation	
power loss [W]	
• for rated value of the current / at AC / in hot operating state / per pole	31.7 W
• maximum	95 W
Current	
operational current	
• at 40 °C / rated value	1 000 A
• at 45 °C / rated value	1 000 A
• at 50 °C / rated value	1 000 A
• at 55 °C / rated value	1 000 A
continuous current / rated value / maximum	1 000 A
continuous current / rated value	1 000 A
adjustable current response value current	
• of the current-dependent overload release / full-scale value	1 000 A
• of instantaneous short-circuit trip unit / minimum	1 500 A
• of instantaneous short-circuit trip unit / maximum	12 000 A
Main circuit	
operating frequency	
• 1 / rated value	50 Hz
• 2 / rated value	60 Hz

Auxiliary circuit			
number of NC contacts / for auxiliary contacts		2	
number of NO contacts / for auxiliary contacts		2	
Suitability			
suitability for use		Plant / motor protection	
Adjustable parameters			
adjustable current response value current			
• of the L-trip / with I4t characteristic / initial value		400 A	
• of the L-trip / with I4t characteristic / full-scale value		1 000 A	
adjustable current response value current / of the current-dependent overload release / initial value		400 A	
Product details			
product component			
• trip indicator		Yes	
• voltage trigger		Yes	
• undervoltage release		No	
design of the auxiliary switch		2 NO + 2 NC	
product extension / optional / motor drive		No	
Product function			
product function			
• grounding protection		No	
• phase failure detection		Yes	
Display and operation			
display version		WITH 4-LINE DISPLAY	
Short circuit			
breaking capacity operating short-circuit current (Ics)			
• at 415 V / rated value		80 kA	
• at 500 V / rated value		80 kA	
• at 690 V / rated value		75 kA	
breaking capacity maximum short-circuit current (Icu)			
• at 415 V / rated value		80 kA	
• at 500 V / rated value		80 kA	
• at 690 V / rated value		75 kA	
Connections			
arrangement of electrical connectors / for main current circuit		Main connection rear side horizontal	
type of electrical connection / for main current circuit		busbar connection	
Mechanical Design			
height		465.5 mm	
width		460 mm	
depth		456 mm	
fastening method		drawer unit	
Environmental conditions			
ambient temperature / during operation			
• minimum		-20 °C	
• maximum		55 °C	
ambient temperature / during storage			
• minimum		-40 °C	
• maximum		70 °C	
General Product Approval		EMC	Declaration of Conformity
			Test Certificates



[UK Declaration of Conformity](#)

[Special Test Certificate](#)

Test Certificates

Marine / Shipping

[Type Test Certificates/Test Report](#)

[Miscellaneous](#)



Marine / Shipping

other

[CCS / China Classification Society](#)



[Miscellaneous](#)

[Confirmation](#)

[Environmental Confirmations](#)

[Miscellaneous](#)

Dangerous Good

[Transport Information](#)

Further information

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1210-3FB36-4GA2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1210-3FB36-4GA2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1210-3FB36-4GA2

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

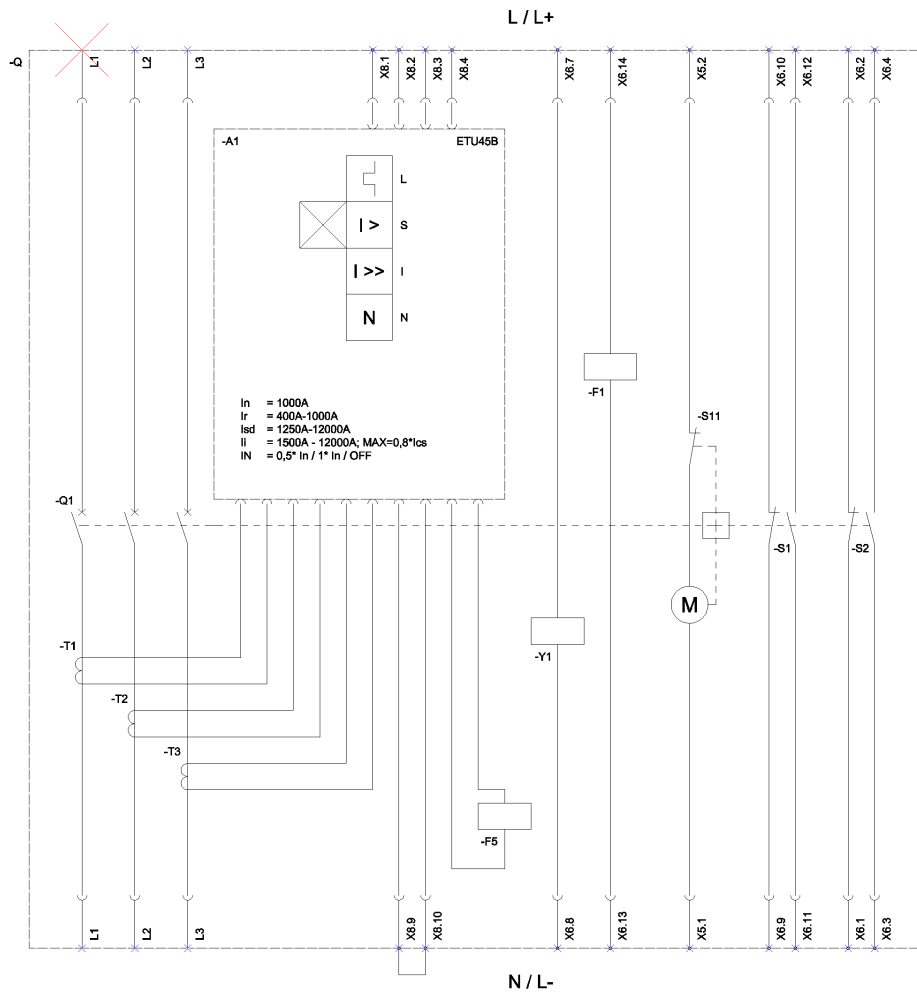

L (Long Time Delay / Überlastschutz); S (Short Time Delay / Kurzschlusschutz, kurzzeitverzögert); I (Instantaneous / Kurzschlusschutz, unverzögert);
 N (Neutral Protection / Neutralleiterschutz); S11 (Internal motor shutdown switch, if spring is tensioned / Interner Motorabstellschalter, wenn Feder gespannt);
 F1 (1st auxiliary release / Erster Hilfsauslöser); F5 (Maglatch for trip unit / Auslösemagnet); S1 - S8 (Auxiliary switch / Hilfsschalter); Y1 (Closing coil / Einschaltmagnet);

last modified:

4/5/2020

