

withdrawable circuit breaker without guide frame 3-pole, size II, IEC In=1600A to 690V, AC50/60Hz Icu=100kA at 500V rear connection horizontal Overcurrent release ETU 25 LSI protection adjustable 0.4-1 in Motorized/manual operating mechanism with spring charging motor AC 50/60 Hz 208-240 V or 220-250 V DC Activation AC 50/60 Hz 230 V, 220 V DC without 1st auxiliary release With 2nd auxiliary release "RC", F4 Undervoltage, Delay 0.2-3.2s 208-240 V AC, 220-250 V DC, 100% ED 4NO+4NC K07= Tripped signaling contact, 1 CO not possible with option F02 R10= Arc chute cover withdrawable part not possible with option A05 Rated voltage 1000 V R21= Shutter 2-part can be locked with padlock S07= Castell/Fortress in Off position with 4 padlock (Safe Off/disconnector function) Disconnector condition in compliance with IEC 60947-2

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1216-4CB35-4AS4-Z K07+R10+R21+S07>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1216-4CB35-4AS4-Z K07+R10+R21+S07>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1216-4CB35-4AS4-Z K07+R10+R21+S07


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>



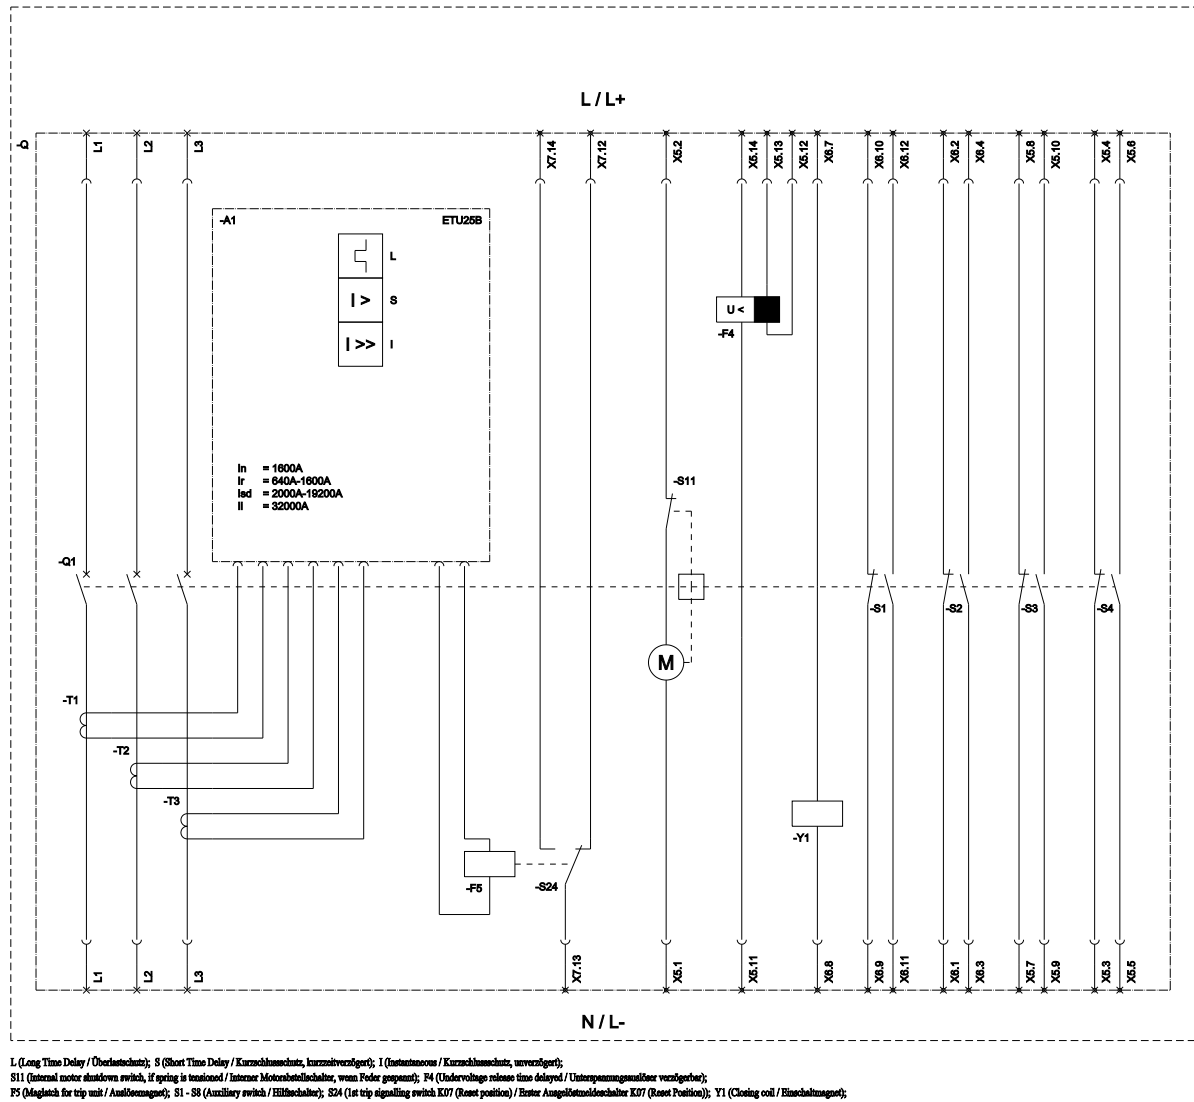

last modified:

2/25/2025

