



fixed-mounted circuit breaker 3-pole, size II, IEC In=2000A to 690V, AC50/60Hz Icu=100kA at 500V frnt.conn. top/bot. dual-hole Overcurrent release ETU 25 LSI protection adjustable 0.4-1 in Motorized/manual operating mechanism with spring charging motor AC 50/60 Hz 208-240 V or 220-250 V DC Activation AC 50/60 Hz 230 V, 220 V DC without 1st auxiliary release With 2nd auxiliary release "R", F3 Undervoltage, instant. 208-240 V AC, 220-250 V DC 2NO+2NC A05= Version for 1000 V C11= electrical On with sealing cap not possible with option F02 C22= Ready indicator F31= EMC filter K07= Tripped signaling contact, 1 CO not possible with option F02 S07= Castell/Fortress in Off position with 4 padlocks (Safe Off/disconnector function) Disconnector condition in compliance with IEC 60947-2

Model	
Product brand name	SENTRON
Product designation	ACB
Design of the product	IEC 60947-2
Design of the operating mechanism	Pushbutton
Type of the driving mechanism	Manual/motorized operating mechanism with mechanical and electrical closing

Type of the driving mechanism / motor drive	Yes
Design of the overcurrent release	ETU25B
General technical data	
Number of poles	3
Size of the circuit-breaker	2
Usage category	B
circuit-breaker / Design	3WL1
Voltage	
Rated insulation voltage U_i	1 000 V
Operating voltage at AC / at 50/60 Hz / rated value	1 000 V
Protection class	
Protection class IP	IP20
Protection class IP / on the front	IP20
protection function of the overcurrent release	LSI
Dissipation	
Power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	60 W
Current	
Operating current / at 45 °C / rated value	2 000 A
Continuous current / rated value	2 000 A
Adjustable pick-up value current - of the current-dependent overload release / Full-scale value - of instantaneous short-circuit trip unit / initial value - of instantaneous short-circuit trip unit / Full-scale value	2 000 A 40 000 A 40 000 A
Main circuit	
Operating frequency 1 / rated value 2 / rated value	50 Hz 60 Hz
Operating current - at 40 °C / rated value - at 50 °C / rated value - at 55 °C / rated value - at 60 °C / rated value - at 65 °C / rated value - at 70 °C / rated value	2 000 A 2 000 A 2 000 A 2 000 A 2 000 A 2 000 A
Auxiliary circuit	

Number of NC contacts / for auxiliary contacts	2
Number of NO contacts / for auxiliary contacts	2
Suitability	
Suitability for use	Plant / motor protection
Adjustable parameters	
Adjustable pick-up value current / of the current-dependent overload release / initial value	800 A
Product details	
Product component	
• Trip indicator	Yes
• Voltage trigger	No
• undervoltage release	Yes
Product extension / optional / motor drive	No
Product function	
Product function	
• Ground fault protection	No
• Phase failure detection	Yes
Display and operation	
Display version	without display
Short circuit	
Operational short-circuit current breaking capacity (Ics)	
• at 415 V / rated value	100 kA
• at 500 V / rated value	100 kA
• at 690 V / rated value	85 kA
Maximum short-circuit current breaking capacity (Icu)	
• at 415 V / rated value	100 kA
• at 500 V / rated value	100 kA
• at 690 V / rated value	85 kA
Connections	
Arrangement of electrical connectors / for main current circuit	Main connection top front/bottom double hole
Type of electrical connection / for main current circuit	busbar connection
Mechanical Design	
Height	507 mm
Width	460 mm
Depth	369 mm
Mounting type	fixed mounting
Environmental conditions	

Ambient temperature / during operation	
• minimum	-20 °C
• maximum	70 °C
Ambient temperature / during storage	
• minimum	-40 °C
• maximum	70 °C

Certificates

Reference code

- acc. to DIN EN 61346-2
- acc. to DIN EN 81346-2

Q
Q

General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval
 CCC	 VDE	 EG-Konf.	Special Test Certificate Miscellaneous  ABS

Shipping Approval	other
 BUREAU VERITAS	 LRS
 PRS	 RMRS
	CCS / China Classification Society Environmental Confirmations

other
Manufacturer Declaration Confirmation Miscellaneous

Further information

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1220-4CB34-4AN2-Z A05+C11+C22+F31+K07+S07>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1220-4CB34-4AN2-Z A05+C11+C22+F31+K07+S07>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1220-4CB34-4AN2-Z A05+C11+C22+F31+K07+S07

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

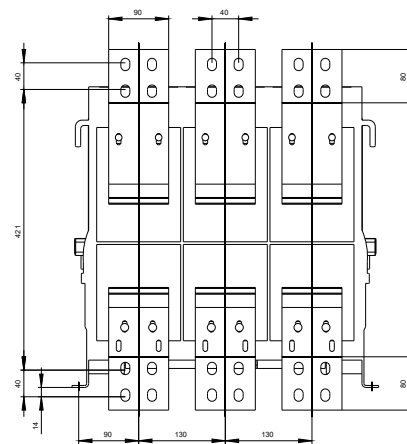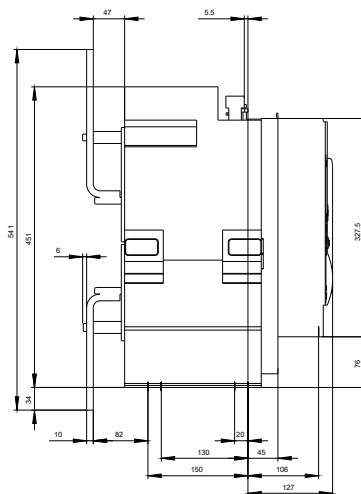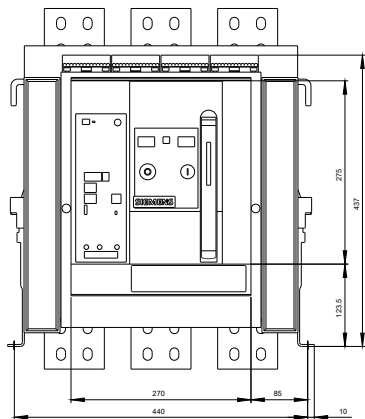

last modified:

06/12/2020