SIEMENS

Data sheet

3WL1220-4CB35-5FM2-Z C11+C22+F31+K07+S07

withdrawable circuit breaker without guide frame 3-pole, size II, IEC In=2000A to 690V, AC50/60Hz Icu=100kA at 500V rear connection horizontal Overcurrent release ETU 25 LSI protection adjustable 0.4-1 in Motorized/manual operating mechanism with spring charging motor AC 50/60 Hz 110-127 V AC or 110-125 V DC Activation 50/60 Hz 110 V AC, 110 V DC With 1st auxiliary release Shunt release "F", F1 50/60 Hz 110 V AC/110 V DC, 100% on-load factor With 2nd auxiliary release "R", F3 Undervoltage, instant. 110-127 V AC, 110-125 V DC 2NO+2NC C11= electrical On with sealing cap not possible with option F02 C22= Ready indicator F31= EMC filter K07= Tripped signaling contact, 1 CO not possible with option F02 S07= Castell/Fortress in Off position with 4 padlock (Safe Off/disconnector function) Disconnector condition in compliance with IEC 60947-2

Model	
product brand name	SENTRON
product designation	ACB
design of the product	IEC 60947-2
design of the actuating element	Pushbutton
type of the driving mechanism	Manual/motorized operating mechanism with mechanical and electrical closing
type of the driving mechanism / motor drive	Yes
design of the overcurrent release	ETU25B
General technical data	
number of poles	3
size of the circuit-breaker	2
utilization category	В
circuit-breaker / Design	3WL1
Voltage	
Rated insulation voltage Ui	1 000 V
insulation voltage / rated value	1 000 V
operating voltage	
• at AC / at 50/60 Hz / rated value	690 V
Protection class	
protection class IP	IP20
 protection class IP / on the front 	IP20
protection function of the overcurrent release	LSI
Dissipation	
power loss [W]	
 for rated value of the current / at AC / in hot operating state / per pole 	106.7 W
• maximum	320 W
Main circuit	
operating frequency	
• 1 / rated value	50 Hz
• 2 / rated value	60 Hz
Auxiliary circuit	
number of NC contacts / for auxiliary contacts	2
number of NO contacts / for auxiliary contacts	2
Suitability	
suitability for use	Plant / motor protection
Adjustable parameters	
adjustable current response value current / of the current- dependent overload release / initial value	800 A
Product details	
product component	
• trip indicator	Yes
voltage trigger	Yes
undervoltage release	Yes

design of the auxiliary switch	2 NO + 2 NC	
product extension / optional / motor drive	No	
Product function		
product function		
 grounding protection 	No	
 phase failure detection 	Yes	
Display and operation		
display version	without display	
Short circuit		
operating short-circuit current breaking capacity (lcs)		
• at 415 V / rated value	100 kA	
• at 500 V / rated value	100 kA	
• at 690 V / rated value	85 kA	
maximum short-circuit current breaking capacity (Icu)		
• at 415 V / rated value	100 kA	
• at 500 V / rated value	100 kA	
• at 690 V / rated value	85 kA	
Connections		
arrangement of electrical connectors / for main current circuit	without guide frame	
type of electrical connection / for main current circuit	Blade contacts	
Mechanical Design		
height	411.5 mm	
width	451 mm	
depth	337 mm	
fastening method	drawer unit	
Environmental conditions		
ambient temperature / during operation		
• minimum	-20 °C	
maximum	70 °C	
ambient temperature / during storage		
• minimum	-40 °C	
• maximum	70 °C	
Further information		
	·	

Information on the packaging

com/cs/ww/en/view/109813875

Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1220-4CB35-5FM2-Z C11+C22+F31+K07+S07

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3WL1220-4CB35-5FM2-Z C11+C22+F31+K07+S07


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1220-4CB35-5FM2-Z C11+C22+F31+K07+S07


CAx-Online-Generator


http://www.siemens.com/cax


Tender specifications


http://www.siemens.com/specifications









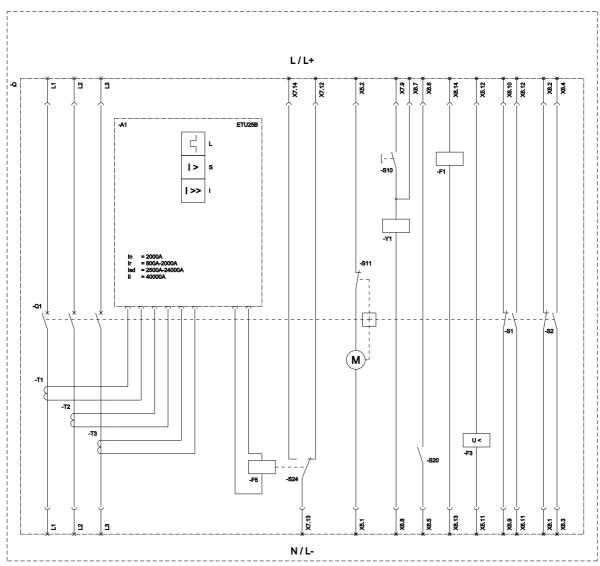

L (Long Time Delay / Überlantschnic); S(Short Time Delay / Kurzachlassechniz, kurzachlassechniz, kurzachlassechniz, kurzachlassechniz, unverzügert); I (Instantaneous / Kurzachlassechniz, unverzügert); S11 (Instantaneous / Kurzachlassechniz, unverzügert); S11 (Instantaneous / Kurzachlassechniz, kurvachlassechniz, kurvachlassechniz, kurvachlassechniz, kurzachlassechniz, kur

last modified: 11/11/2024 **C**

