

withdrawable circuit breaker with guide frame 3-pole, size II, IEC
In=2500A to 690V, AC50/60Hz Icu=66kA at 500V rear connection
vertical Overcurrent release ETU45 LSIN protection adjustable 0.4-1
in with display and cubicle bus Opt.: Comm. /measuring func./ground
fault/ ZSS Motorized/manual operating mechanism with spring
charging motor AC 50/60 Hz 208-240 V or 220-250 V DC Activation
AC 50/60 Hz 230 V, 220 V DC With 1st auxiliary release Shunt
release "F", F1 50/60 Hz 230 V AC/220 V DC, 100% on-load factor
without 2nd auxiliary release 4NO+4NC K07= Tripped signaling
contact, 1 CO not possible with option F02



Model	
Product brand name	SENTRON
Product designation	ACB
Design of the product	IEC 60947-2
Design of the operating mechanism	Pushbutton
Type of the driving mechanism	Manual/motorized operating mechanism with mechanical and electrical closing

Type of the driving mechanism / motor drive	Yes
Design of the overcurrent release	ETU45B
General technical data	
Number of poles	3
Size of the circuit-breaker	2
Usage category	B
circuit-breaker / Design	3WL1
Voltage	
Rated insulation voltage U_i	1 000 V
Operating voltage at AC / at 50/60 Hz / rated value	690 V
Protection class	
Protection class IP	IP20
Protection class IP / on the front	IP20
protection function of the overcurrent release	LSIN
Dissipation	
Power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	173.3 W
Current	
Operating current / at 45 °C / rated value	2 500 A
Continuous current / rated value	2 500 A
Adjustable pick-up value current - of the current-dependent overload release / Full-scale value - of instantaneous short-circuit trip unit / initial value - of instantaneous short-circuit trip unit / Full-scale value	2 500 A 3 750 A 30 000 A
Main circuit	
Operating frequency 1 / rated value 2 / rated value	50 Hz 60 Hz
Operating current - at 40 °C / rated value - at 50 °C / rated value - at 55 °C / rated value	2 500 A 2 500 A 2 500 A
Auxiliary circuit	
Number of NC contacts / for auxiliary contacts	4
Number of NO contacts / for auxiliary contacts	4
Suitability	

Suitability for use	Plant / motor protection
Adjustable parameters	
Adjustable pick-up value current	
• of the L-trip / with I4t characteristic / initial value	1 000 A
• of the L-trip / with I4t characteristic / Full-scale value	2 500 A
Adjustable pick-up value current / of the current-dependent overload release / initial value	1 000 A
Product details	
Product component	
• Trip indicator	Yes
• Voltage trigger	Yes
• undervoltage release	No
Product extension / optional / motor drive	No
Product function	
Product function	
• Ground fault protection	No
• Phase failure detection	Yes
Display and operation	
Display version	WITH 4-LINE DISPLAY
Short circuit	
Operational short-circuit current breaking capacity (Ics)	
• at 415 V / rated value	66 kA
• at 500 V / rated value	66 kA
• at 690 V / rated value	50 kA
Maximum short-circuit current breaking capacity (Icu)	
• at 415 V / rated value	66 kA
• at 500 V / rated value	66 kA
• at 690 V / rated value	50 kA
Connections	
Arrangement of electrical connectors / for main current circuit	Main terminal on the rear vertical
Type of electrical connection / for main current circuit	busbar connection
Mechanical Design	
Height	465.5 mm
Width	460 mm
Depth	465.5 mm
Mounting type	drawer unit
Environmental conditions	

Ambient temperature / during operation	
• minimum	-20 °C
• maximum	55 °C
Ambient temperature / during storage	
• minimum	-40 °C
• maximum	70 °C

Certificates

Reference code

- acc. to DIN EN 61346-2
- acc. to DIN EN 81346-2

Q
Q

General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval
 CCC	 VDE	 EG-Konf.	Special Test Certificate Miscellaneous  ABS

Shipping Approval	other
 BUREAU VERITAS	CCS / China Classification Society Environmental Confirmations Manufacturer Declaration
 LRS	
 RMRS	

other
Confirmation Miscellaneous

Further information

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1225-2FB37-4GA4-Z K07>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1225-2FB37-4GA4-Z K07>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1225-2FB37-4GA4-Z K07

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

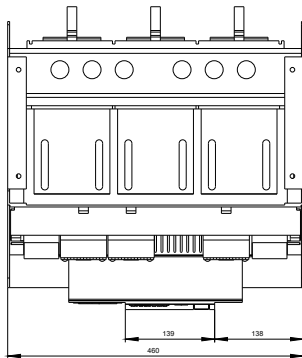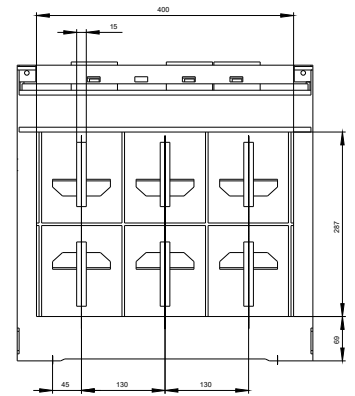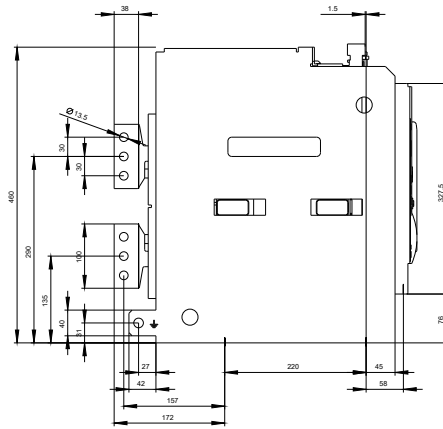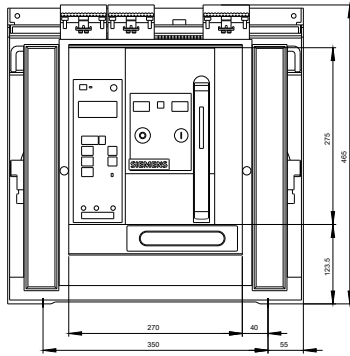

last modified:

06/17/2020