



fixed-mounted circuit breaker 3-pole, size II, IEC In=2500A to 690V, AC50/60Hz Icu=100kA at 500V frnt.conn. top/bot. dual-hole Overcurrent release ETU 25 LSI protection adjustable 0.4-1 in Motorized/manual operating mechanism with spring charging motor AC 50/60 Hz 208-240 V or 220-250 V DC Activation AC 50/60 Hz 230 V, 220 V DC without 1st auxiliary release With 2nd auxiliary release "R", F3 Undervoltage, instant. 208-240 V AC, 220-250 V DC 2NO+2NC A05= Version for 1000 V C11= electrical On with sealing cap not possible with option F02 C22= Ready indicator F31= EMC filter K07= Tripped signaling contact, 1 CO not possible with option F02 S07= Castell/Fortress in Off position with 4 padlocks (Safe Off/disconnector function) Disconnector condition in compliance with IEC 60947-2 T40= Door sealing frame

Model	
product brand name	SENTRON
product designation	ACB
design of the product	IEC 60947-2
design of the actuating element	Pushbutton
type of the driving mechanism	Manual/motorized operating mechanism with mechanical and electrical closing
type of the driving mechanism / motor drive	Yes
design of the overcurrent release	ETU25B
General technical data	
number of poles	3
size of the circuit-breaker	2
utilization category	B
circuit-breaker / Design	3WL1
Voltage	
Rated insulation voltage Ui	1 000 V
insulation voltage / rated value	1 000 V
operating voltage	
• at AC / at 50/60 Hz / rated value	1 000 V
Protection class	
protection class IP	IP20
protection function of the overcurrent release	LSI
Dissipation	
power loss [W]	
• for rated value of the current / at AC / in hot operating state / per pole	90 W
• maximum	270 W
Current	
continuous current / rated value / maximum	2 500 A
continuous current / rated value	2 500 A
adjustable current response value current	
• of instantaneous short-circuit trip unit / initial value	50 000 A
• of instantaneous short-circuit trip unit / full-scale value	50 000 A
Main circuit	
operating frequency	
• 1 / rated value	50 Hz
• 2 / rated value	60 Hz
operational current	
• at 40 °C / rated value	2 500 A
• at 50 °C / rated value	2 500 A

• at 55 °C / rated value • at 60 °C / rated value • at 65 °C / rated value • at 70 °C / rated value	2 500 A 2 500 A 2 500 A 2 280 A
Auxiliary circuit	
number of NC contacts / for auxiliary contacts	2
number of NO contacts / for auxiliary contacts	2
Suitability	
suitability for use	Plant / motor protection
Product details	
product component	
• trip indicator • voltage trigger • undervoltage release	Yes No Yes
design of the auxiliary switch	2 NO + 2 NC
product extension / optional / motor drive	No
Product function	
product function	
• grounding protection • phase failure detection	No Yes
Display and operation	
display version	without display
Short circuit	
breaking capacity operating short-circuit current (Ics)	
• at 415 V / rated value • at 500 V / rated value • at 690 V / rated value	100 kA 100 kA 85 kA
breaking capacity maximum short-circuit current (Icu)	
• at 415 V / rated value • at 500 V / rated value • at 690 V / rated value	100 kA 100 kA 85 kA
Connections	
arrangement of electrical connectors / for main current circuit	Main connection top front/bottom double hole
type of electrical connection / for main current circuit	busbar connection
Mechanical Design	
height	512 mm
width	460 mm
depth	379 mm
fastening method	fixed mounting
Environmental conditions	
ambient temperature / during operation	
• minimum • maximum	-20 °C 70 °C
ambient temperature / during storage	
• minimum • maximum	-40 °C 70 °C
Certificates	
reference code	
• acc. to DIN EN 61346-2 • acc. to IEC 81346-2	Q Q
Further information	
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1225-4CB34-4AN2-Z A05+C11+C22+F31+K07+S07+T40 Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3WL1225-4CB34-4AN2-Z A05+C11+C22+F31+K07+S07+T40 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1225-4CB34-4AN2-Z A05+C11+C22+F31+K07+S07+T40	

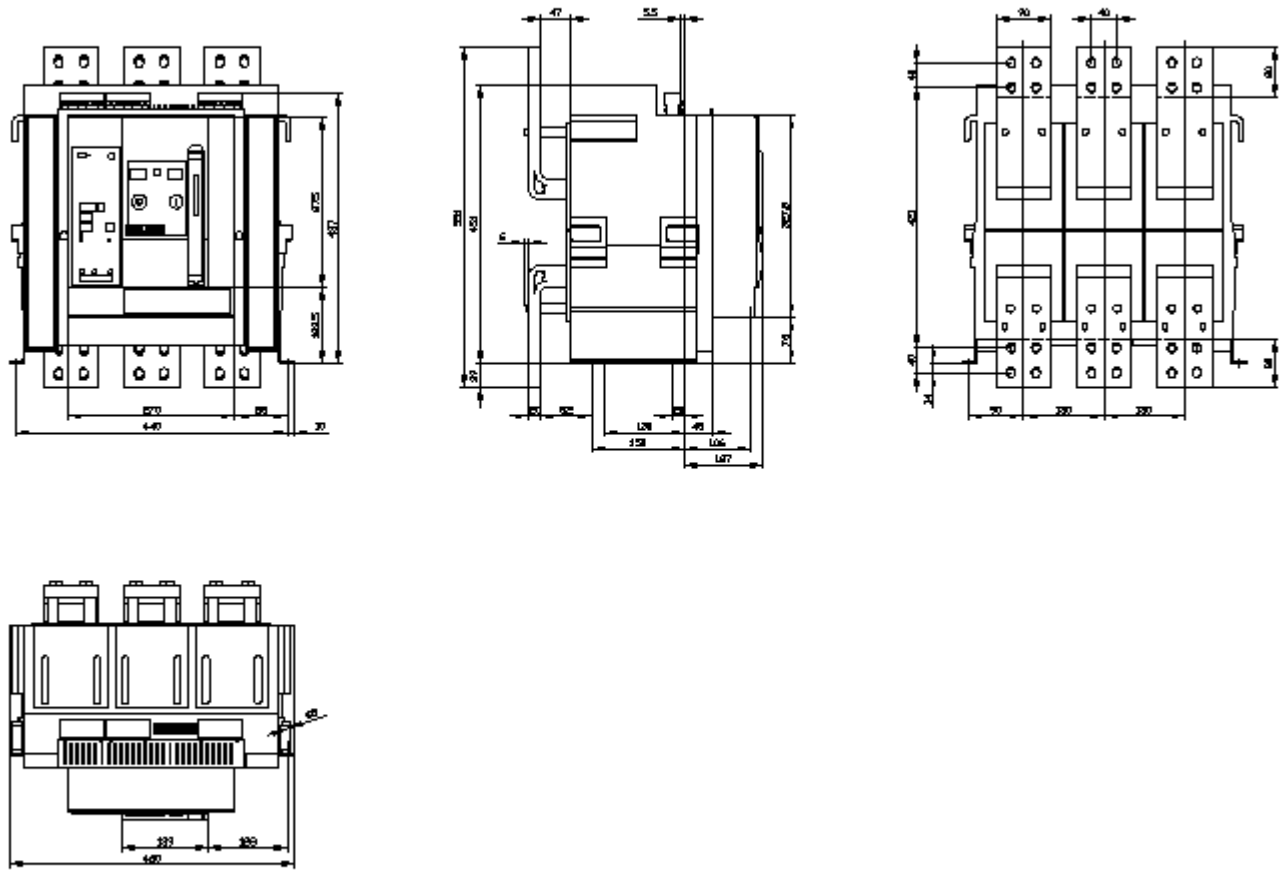

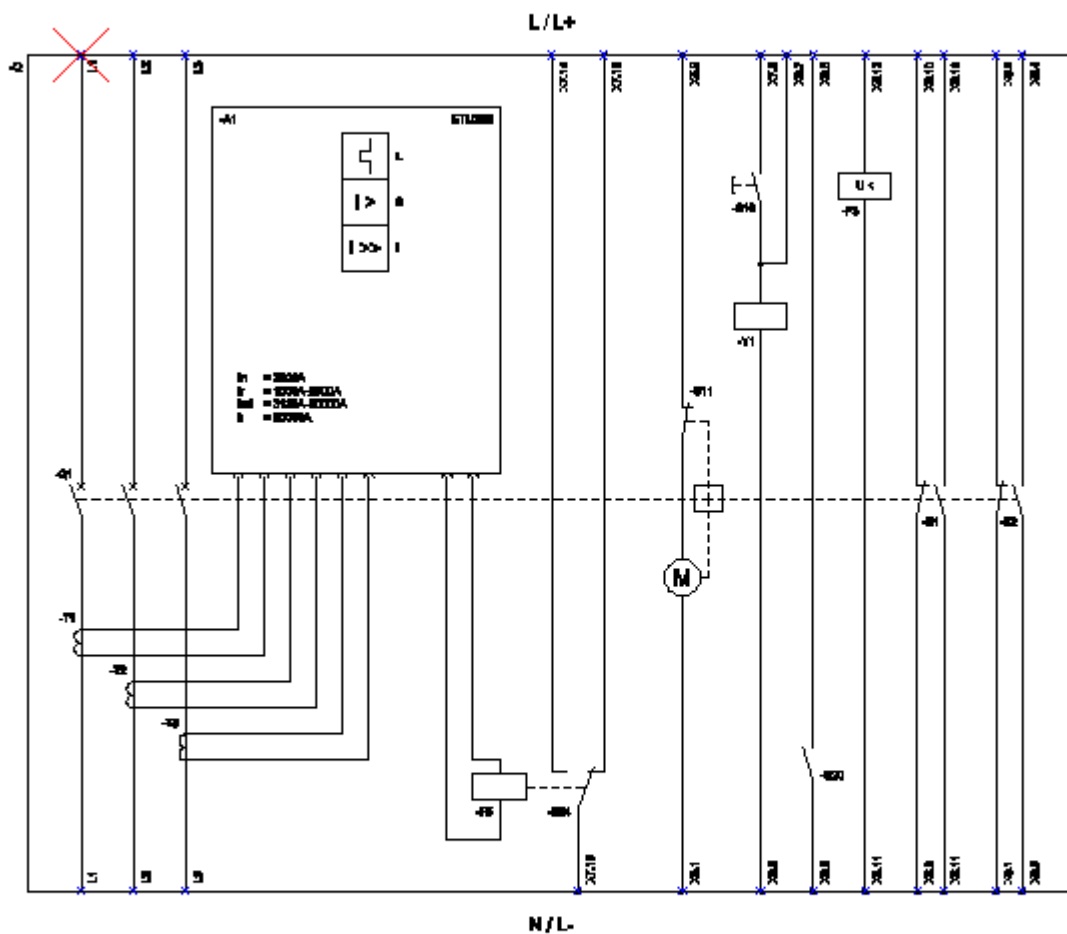

S1 (Long time delay / Überlastschütz); S2 (Short time delay / Kurzschlusschutz, Inversenverschiebung); S3 (Drehrichtung / Drehrichtungsschutz, Inversenverschiebung);
 RT (Thermal relay shutdown switch, if spring is tensioned / Interlock Notabschaltelockschalter, wenn Feder gespannt); S0 (Under-voltage release / Unterspannungsschalter);
 S4 (Stop button for trip unit / Stoppknopf); S1 - S4 (Auxiliary switch / Hilfskontakt); S0 (Reset / Reset); S0 (Reset / Reset); S0 (Reset / Reset); S0 (Reset / Reset);
 S4 (Stop button for trip unit / Stoppknopf); S1 - S4 (Auxiliary switch / Hilfskontakt); S0 (Reset / Reset); S0 (Reset / Reset); S0 (Reset / Reset); S0 (Reset / Reset);

last modified:

3/26/2020