



fixed-mounted circuit breaker 3-pole, size II, IEC
In=3200A to 690V, AC50/60Hz Icu=100kA at 500V rear
connection horizontal Overcurrent release ETU 25 LSI
protection adjustable 0.4-1 in With manual operating
mechanism with storage with mechanical request
without 1st auxiliary release With 2nd auxiliary release
"R", F3 Undervoltage, instant. 24 V DC 2NO+2NC K07=
Tripped signaling contact, 1 CO not possible with option
F02 S01= CES locking device in OFF position (safe
OFF/disconnector functionality) Disconnecter condition
in compliance with IEC 60947-2

Model		
Product brand name		SENTRON
Product designation		ACB
Design of the product		IEC 60947-2
Design of the auxiliary switch		2 NO + 2 NC
Design of the operating mechanism		Pushbutton

Type of the driving mechanism		Manual operating mechanism with mechanical closing
Type of the driving mechanism / motor drive		No
Design of the overcurrent release		ETU25B

General technical data

Number of poles		3
Size of the circuit-breaker		2
Electrical endurance (switching cycles) / typical		15 000
Usage category		B
circuit-breaker / Design		3WL1
Mechanical service life (switching cycles) / typical		15 000

Voltage

Rated insulation voltage Ui	V	1 000
-----------------------------	---	-------

Protection class

Protection class IP		IP20
Protective function of the overcurrent release		LSI

Dissipation

Power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	W	136.7
---	---	-------

Electricity

Operating current / at 45 °C / rated value	A	3 200
Continuous current / rated value	A	3 200
Adjustable pick-up value current		
• of the current-dependent overload release / Full-scale value	A	3 200
• of instantaneous short-circuit trip unit / initial value	A	50 000
• of instantaneous short-circuit trip unit / Full-scale value	A	50 000
Short-time current resistance (Icw)		
• limited to 0.5 s / rated value	kA	100
• limited to 1 s / rated value	kA	85
• limited to 2 s / rated value	kA	70
• limited to 3 s / rated value	kA	65

Main circuit

Operating frequency		
• 1 / rated value	Hz	50
• 2 / rated value	Hz	60
Operating voltage		
• at AC / at 50/60 Hz / rated value	V	690
Operating current		

• at 40 °C / rated value	A	3 200
• at 50 °C / rated value	A	3 200
• at 55 °C / rated value	A	3 200
• at 60 °C / rated value	A	3 020
• at 65 °C / rated value	A	3 020
• at 70 °C / rated value	A	2 870

Auxiliary circuit

Number of NC contacts / for auxiliary contacts		2
Number of NO contacts / for auxiliary contacts		2

Suitability

Suitability for use		Plant / motor protection
---------------------	--	--------------------------

Adjustable parameters

Adjustable pick-up value current / of the current-dependent overload release / initial value	A	1 280
--	---	-------

Product details

Product component		
• Trip indicator		Yes
• Voltage trigger		No
• undervoltage release		Yes
Product extension / optional / motor drive		Yes

Product function

Product function		
• Ground fault protection		No
• Phase failure detection		Yes

Display and operation

Display version		without display
-----------------	--	-----------------

Short circuit

Operational short-circuit current breaking capacity (Ics)		
• at 415 V / rated value	kA	100
• at 500 V / rated value	kA	100
• at 690 V / rated value	kA	85
Maximum short-circuit current breaking capacity (Icu)		
• at 415 V / rated value	kA	100
• at 500 V / rated value	kA	100
• at 690 V / rated value	kA	85
• at 1000/1150 V / rated value	kA	50

Connections

Type of electrical connection / for main current circuit		busbar connection
--	--	-------------------

Mechanical Design

Height	mm	440.5
Width	mm	460
Depth	mm	337
Mounting type		fixed mounting

Environmental conditions

Ambient temperature		
• during operation / minimum	°C	-20
• during operation / maximum	°C	70
• during storage / minimum	°C	-40
• during storage / maximum	°C	70

Certificates

Reference code		
• acc. to DIN EN 61346-2		Q
• acc. to DIN EN 81346-2		Q

General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval
 CCC	 VDE	 EG-Konf.	Special Test Certificate Miscellaneous  ABS

Shipping Approval	other
 BUREAU VERITAS	 GL
 LRS	 PRS
	 RMRS
	Environmental Confirmations

other
Miscellaneous

Further information

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1232-4CB32-1AJ2-Z K07+S01>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3WL1232-4CB32-1AJ2-Z K07+S01>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1232-4CB32-1AJ2-Z K07+S01

CAX-Online-Generator

<http://www.siemens.com/cax>



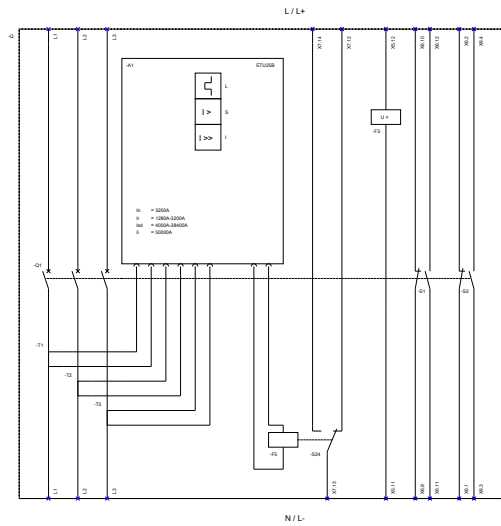

L (Long Time Delay / Überstromschutz); S (Short Time Delay / Kurzstromschutz, kurzzeitverzögert); I (Instantaneous / Kurzstromschutz, unverzögert);
 S2 (Shunt-release / Unterstromverriegelung); S2 (Shunt for trip unit / Auslöseverriegelung); S1 - S8 (Auxiliary switch / Hilfskontakt);
 S24 (1st trip signaling switch K07 (Reset position) / Erster Ausgabelasteinschalter K07 (Reset Position))

last modified:

12/26/2018