


Withdrawable non-automatic air circuit breaker with slide-in module frame 4-pole, Size 3, IEC $I_n=4000$ A up to 690 V, 50/60 Hz AC $I_{cu}=100$ kA at 500 V Rear horizontal connection

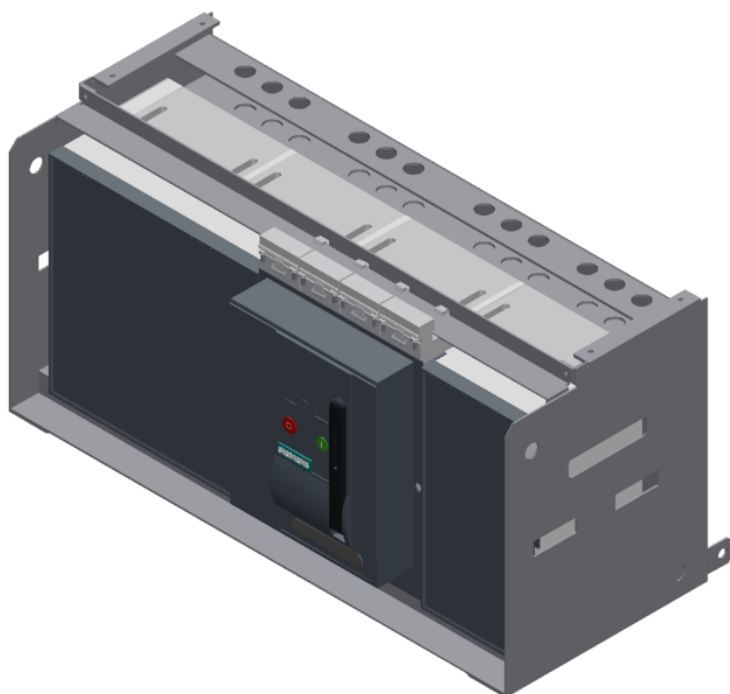

Model		
Product brand name		SENTRON
Product designation		ACB
Design of the product		IEC 60947-2
Design of the auxiliary switch		4 NO + 4 NC
Design of the operating mechanism		Pushbutton
Type of the driving mechanism		Manual/motorized operating mechanism with mechanical and electrical closing
Type of the driving mechanism / motor drive		Yes
Design of the overcurrent release		without

General technical data		
Number of poles		4
Size of the circuit-breaker		3
Electrical endurance (switching cycles) / typical		10 000
Usage category		B
circuit-breaker / Design		3WL1340
Mechanical service life (switching cycles) / typical		10 000

Voltage		
Rated insulation voltage Ui	V	1 000

Protection class		
Protection class IP		IP20
Protective function of the overcurrent release		without

Dissipation		
Power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	W	270

Electricity		
Operating current / at 45 °C / rated value	A	4 000
Continuous current / rated value	A	4 000
Short-time current resistance (I _{cw})		
• limited to 0.5 s / rated value	kA	100
• limited to 1 s / rated value	kA	100
• limited to 2 s / rated value	kA	80
• limited to 3 s / rated value	kA	65

Main circuit		
Operating frequency		
• 1 / rated value	Hz	50
• 2 / rated value	Hz	60
Operating voltage		
• at AC / at 50/60 Hz / rated value	V	690
Operating current		
• at 40 °C / rated value	A	4 000

- at 50 °C / rated value
- at 55 °C / rated value
- at 60 °C / rated value
- at 65 °C / rated value
- at 70 °C / rated value

A	4 000
A	4 000
A	4 000
A	4 000
A	4 000

Auxiliary circuit

Number of NC contacts / for auxiliary contacts		4
Number of NO contacts / for auxiliary contacts		4

Suitability

Suitability for use		Contact unit without release
---------------------	--	------------------------------

Product details

Product component		
• Trip indicator		No
• Voltage trigger		Yes
• undervoltage release		No
Product extension / optional / motor drive		No

Product function

Product function		
• Ground fault protection		No

Display and operation

Display version		without display
-----------------	--	-----------------

Short circuit

Operational short-circuit current breaking capacity (Ics)		
• at 415 V / rated value	kA	100
• at 500 V / rated value	kA	100
• at 690 V / rated value	kA	85
Maximum short-circuit current breaking capacity (Icu)		
• at 415 V / rated value	kA	100
• at 500 V / rated value	kA	100
• at 690 V / rated value	kA	85
• at 1000/1150 V / rated value	kA	50

Connections

Arrangement of electrical connectors / for main current circuit		Main terminal on the rear horizontal
Type of electrical connection / for main current circuit		busbar connection

Mechanical Design

Height	mm	466.5
Width	mm	914

Depth	mm	456
Mounting type		drawer unit

Environmental conditions

Ambient temperature

- during operation / minimum
- during operation / maximum
- during storage / minimum
- during storage / maximum

°C	-25
°C	70
°C	-40
°C	70

Certificates

Reference code

- acc. to DIN EN 61346-2
- acc. to DIN EN 81346-2

Q
Q

General Product Approval	Declaration of Conformity	Test Certificates		Shipping Approval
 CCC	 VDE	 EG-Konf.	Miscellaneous Special Test Certificate	 ABS

Shipping Approval



other

[Environmental Confirmations](#)
[Miscellaneous](#)

Further information

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1340-4AA46-5FA4-Z C11>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1340-4AA46-5FA4-Z C11>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1340-4AA46-5FA4-Z C11


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

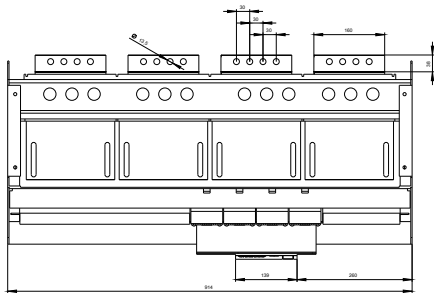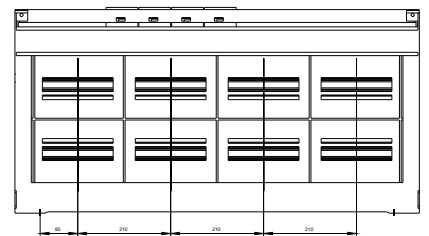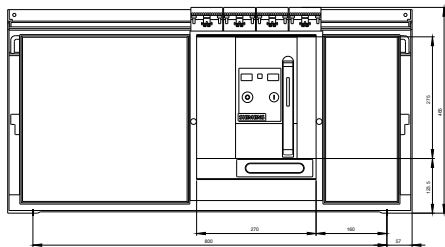

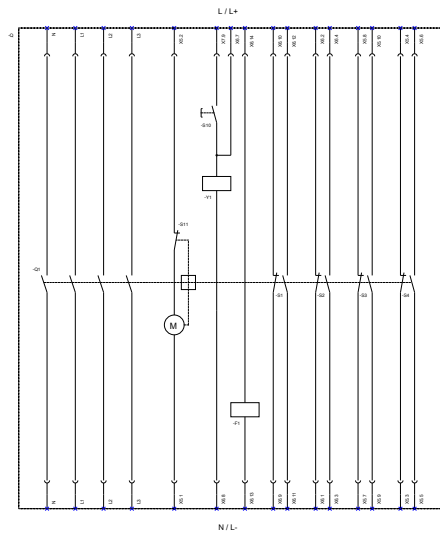

S11 (Internal motor shutdown switch, if spring is tensioned / interner Motorschutzschalter, wenn Feder gespannt)
 F1 (1st auxiliary release / Erste Hilfskontakt), S1 - S2 (Auxiliary switch / Hilfskontakt), S10 (Local Electrical - TT (Closing coil / Einschaltmagnet)

last modified:

07/18/2018