


withdraw. non-aut. circuit-b. with guide frame 4-pole, size III, IEC
In=4000A to 690V, AC50/60Hz Icu=100kA at 500V rear connection
horizontal without overcurrent release Motorized/manual operating
mechanism with spring charging motor AC 50/60 Hz 110-127 V AC
or 110-125 V DC Activation 50/60 Hz 110 V AC, 110 V DC With 1st
auxiliary release Shunt release "F", F1 50/60 Hz 110 V AC/110 V DC,
100% on-load factor without 2nd auxiliary release 4NO+4NC

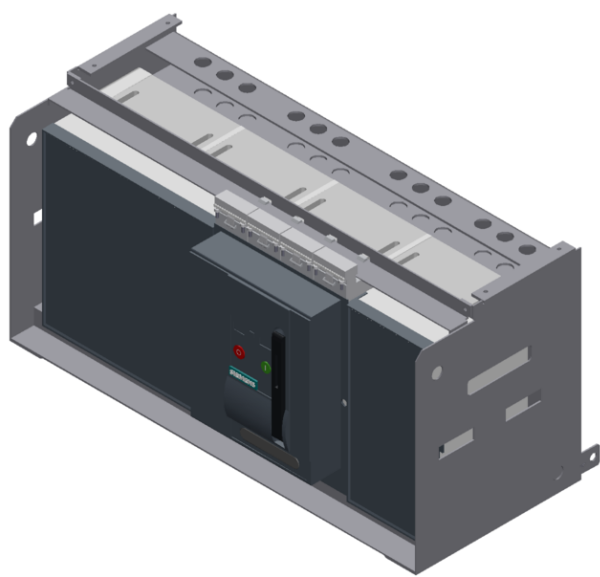

Model	
Product brand name	SENTRON
Product designation	ACB
Design of the auxiliary switch	4 NO + 4 NC
Design of the product	IEC 60947-2
Design of the operating mechanism	Pushbutton

Type of the driving mechanism	Manual/motorized operating mechanism with mechanical and electrical closing
Type of the driving mechanism / motor drive	Yes
Design of the overcurrent release	without

General technical data

Number of poles	4
Size of the circuit-breaker	3
Usage category	B
circuit-breaker / Design	3WL1

Voltage

Rated insulation voltage U_i	1 000 V
--------------------------------	---------

Protection class

Protection class IP	IP20
Protection class IP / on the front	IP20
Protective function of the overcurrent release	without

Dissipation

Power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	270 W
---	-------

Electricity

Operating current / at 45 °C / rated value	4 000 A
Continuous current / rated value	4 000 A

Main circuit

Operating frequency	
• 1 / rated value	50 Hz
• 2 / rated value	60 Hz
Operating voltage	
• at AC / at 50/60 Hz / rated value	690 V
Operating current	
• at 40 °C / rated value	4 000 A
• at 50 °C / rated value	4 000 A
• at 55 °C / rated value	4 000 A
• at 60 °C / rated value	4 000 A
• at 65 °C / rated value	4 000 A
• at 70 °C / rated value	4 000 A

Auxiliary circuit

Number of NC contacts / for auxiliary contacts	4
Number of NO contacts / for auxiliary contacts	4

Suitability

Suitability for use	Contact unit without release
---------------------	------------------------------

Product details	
Product component	
• Trip indicator	No
• Voltage trigger	Yes
• undervoltage release	No
Product extension / optional / motor drive	No
Product function	
Product function	
• Ground fault protection	No
Display and operation	
Display version	without display
Short circuit	
Operational short-circuit current breaking capacity (Ics)	
• at 415 V / rated value	100 kA
• at 500 V / rated value	100 kA
• at 690 V / rated value	85 kA
Maximum short-circuit current breaking capacity (Icu)	
• at 415 V / rated value	100 kA
• at 500 V / rated value	100 kA
• at 690 V / rated value	85 kA
Connections	
Arrangement of electrical connectors / for main current circuit	Main connection rear side horizontal
Type of electrical connection / for main current circuit	busbar connection
Mechanical Design	
Height	466.5 mm
Width	914 mm
Depth	456 mm
Mounting type	drawer unit
Environmental conditions	
Ambient temperature	
	-25 ... +70 °C
	-40 ... +70 °C
Certificates	
Reference code	
• acc. to DIN EN 61346-2	Q
• acc. to DIN EN 81346-2	Q

General Product Approval		Declaration of Conformity	Test Certificates		Shipping Approval
			Miscellaneous	Special Test Certificate	
CCC	VDE	EG-Konf.			ABS

Shipping Approval					other
				CCS / China Classification Society	Environmental Confirmations
BUREAU VERITAS	LRS	PRS	RMRS		

other		
Manufacturer Declaration	Confirmation	Miscellaneous

Further information

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1340-4AA46-5FA4>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1340-4AA46-5FA4>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1340-4AA46-5FA4

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

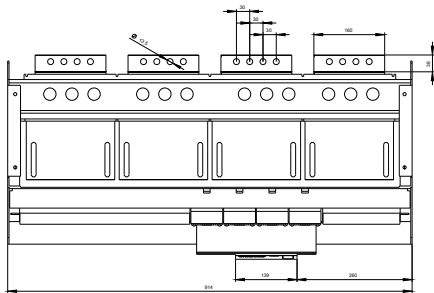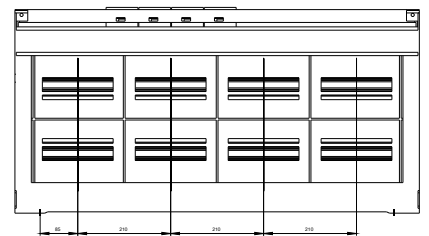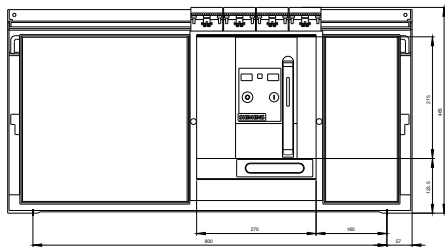

last modified:

12/13/2019