SIEMENS

Data sheet 3WL1350-4FG36-4GG4

withdrawable circuit breaker with guide frame 3-pole, size iii, IEC In=5000A to 690V, AC50/60Hz Icu=100kA at 500V rear connection horizontal Overcurrent release ETU 45 LSING protection adjustable 0.4-1 in with display and cubicle bus with ground fault protection Opt.: Comm./measuring func./ZSS Motorized/manual operating mechanism with spring charging motor AC 50/60 Hz 208-240 V or 220-250 V DC Activation AC 50/60 Hz 230 V, 220 V DC With 1st auxiliary release Shunt release "F", F1 50/60 Hz 230 V AC/220 V DC, 100% on-load factor With 2nd auxiliary release "F", F2 Shunt release 230 V AC/220 V DC, 100% on-load factor 4NO+4NC

Model	
product brand name	SENTRON
product designation	ACB
design of the product	IEC 60947-2
design of the actuating element	Pushbutton
type of the driving mechanism	Manual/motorized operating mechanism with mechanical and electrical closing
type of the driving mechanism / motor drive	Yes
design of the overcurrent release	ETU45B
General technical data	
number of poles	3
size of the circuit-breaker	3
utilization category	B
circuit-breaker / Design	3WL1
Voltage	
Rated insulation voltage Ui	1 000 V
insulation voltage / rated value	1 000 V
operating voltage	
● at AC / at 50/60 Hz / rated value	690 V
Protection class	
protection class IP	IP20
● protection class IP / on the front	IP20
● protection function of the overcurrent release	LSING
Dissipation	
power loss [W]	
● for rated value of the current / at AC / in hot operating state / per pole	350 W
● maximum	1 050 W
Main circuit	
operating frequency	
● 1 / rated value	50 Hz
● 2 / rated value	60 Hz
Auxiliary circuit	
number of NC contacts / for auxiliary contacts	4
number of NO contacts / for auxiliary contacts	4
Suitability	
suitability for use	Plant / motor protection
Product details	
product component	
● trip indicator	Yes
● voltage trigger	Yes
● undervoltage release	No
design of the auxiliary switch	4 NO + 4 NC
product extension / optional / motor drive	No
Product function	
product function	

Subject to change without notice
© Copyright Siemens

● grounding protection	Yes
● phase failure detection	Yes
Display and operation	
display version	WITH 4-LINE DISPLAY
Short circuit	
operating short-circuit current breaking capacity (Ics)	
● at 415 V / rated value	100 kA
● at 500 V / rated value	100 kA
● at 690 V / rated value	85 kA
maximum short-circuit current breaking capacity (Icu)	
● at 415 V / rated value	100 kA
● at 500 V / rated value	100 kA
● at 690 V / rated value	85 kA
Connections	
arrangement of electrical connectors / for main current circuit	Main connection rear side horizontal
type of electrical connection / for main current circuit	busbar connection
Mechanical Design	
height	466.5 mm
width	704 mm
depth	456 mm
fastening method	drawer unit
Environmental conditions	
ambient temperature / during operation	
● minimum	-20 °C
● maximum	55 °C
ambient temperature / during storage	
● minimum	-40 °C
● maximum	70 °C
Further information	

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1350-4FG36-4GG4
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3WL1350-4FG36-4GG4
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1350-4FG36-4GG4
CAx-Online-Generator
http://www.siemens.com/cax
Tender specifications
http://www.siemens.com/specifications

Subject to change without notice
© Copyright Siemens

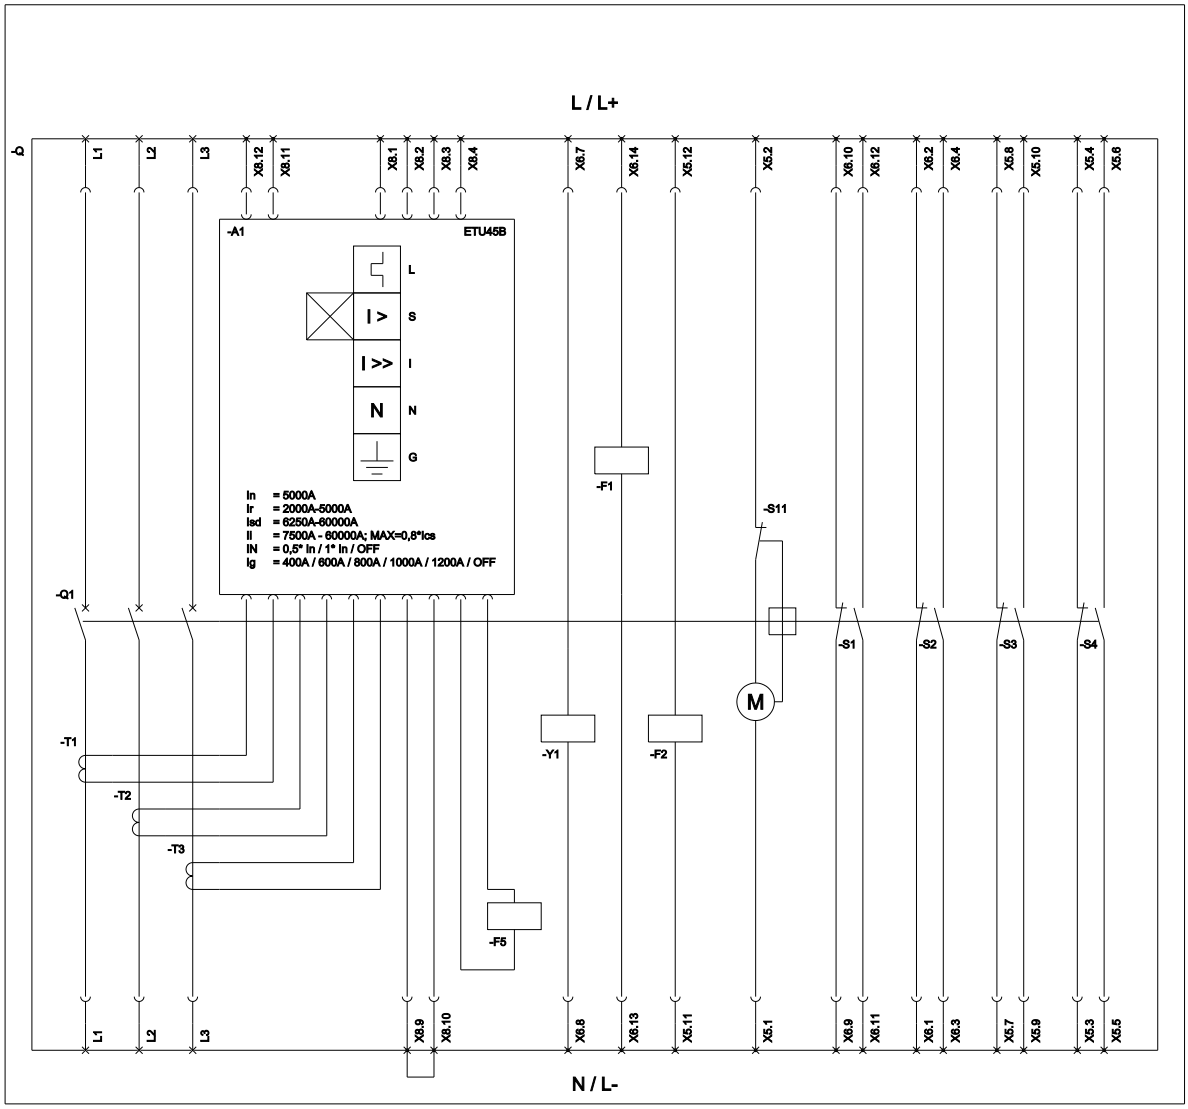

L (Long Time Delay / Überlastschutz); S (Short Time Delay / Kurzschlussschutz, kurzzeitverzögert); I (Instantaneous / Kurzschlussschutz, unverzögert); N (Neutral Protection / Neutralleiterschutz);
G (Ground Fault Protection / Erdschlussschutz); S11 (Internal motor shutdown switch, if spring is tensioned / Interner Motorabstellschalter, wenn Feder gespannt); F1 (1st auxiliary release / Erster Hilfsauslöser);
F2 (2nd auxiliary release / Zweiter Hilfsauslöser); F5 (Maglatch for trip unit / Auslösemagnet); S1 - S8 (Auxiliary switch / Hilfsschalter); Y1 (Closing coil / Einschaltmagnet);

last modified: 3/6/2020

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens