



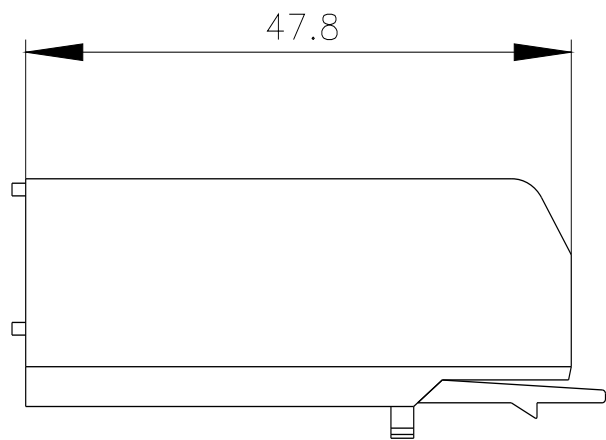

Removable terminal 2-pole, push-in terminals up to maximal 2 x 1.5 mm²
For SIRIUS devices in industrial standard mounting rail enclosure

product brand name	SIRIUS
product category	Removable terminals
product designation	Terminal for control circuit/2-pole
design of the product	Spring-loaded terminal (push-in)/up to max. 2 x 1.5 mm ²
General technical data	
protection class IP	IP20
Substance Prohibitance (Date)	01.03.2017
type of connectable conductor cross-sections	• solid 1x (0.5 ... 1.5 mm²), 2x (0.5 ... 1.5 mm²) • finely stranded with core end processing 1x (0.5 ... 1.0 mm²), 2x (0.5 ... 1.0 mm²) • finely stranded without core end processing 1x (0.5 ... 1.5 mm²), 2x (0.5 ... 1.5 mm²) • at AWG cables solid 1x (20 ... 16), 2x (20 ... 16) • at AWG cables stranded 1x (20 ... 16), 2x (20 ... 16)
width	7.5 mm
Further information	
Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10	
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3ZY1121-2BA00	
Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3ZY1121-2BA00	
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3ZY1121-2BA00	
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3ZY1121-2BA00&lang=en	
Characteristic: Derating https://support.industry.siemens.com/cs/ww/en/ps/3ZY1121-2BA00/manual	

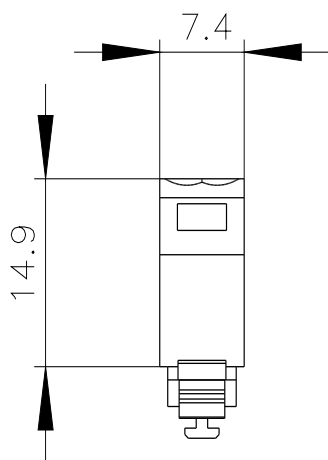

last modified:

1/28/2021 