



POWER SUPPLY FOR CONSTANT LOAD PRIM 85..265V AC,
85..300V DC SEC 24V DC +- 5% MOUNTING WIDTH 2WU
(WIDTH UNIT) SHORT CIRCUIT AND OVERLOAD PROTECTION

Similar to image

Technical data:		
Input voltage	V	265
Design of the transformer		power transformer
Number of pitch units for width		2
Product function / thermoprotection		Yes
Characteristic feature of the output / short-circuit protected		Yes
Type of fixing/fixation / series installation		Yes
Active power loss / maximum	W	0
Suitability for integration / flush mounting		No
Output current / maximum	A	0.35
4		No
Output voltage / _ 1 / rated value	V	24
Output voltage / _ 2 / rated value	V	0
Output voltage / _ 3 / rated value	V	0
Output current / _ 1 / rated value	A	0.35
Output current / _ 2 / rated value	A	0
Output current / _ 3 / rated value	A	0
Length	mm	90
Width	mm	36

Height	mm	64
Active power supplied / maximum	W	8.4
Suitability for integration / surface-mounted installation		No

Certificates/approvals:

General Product Approval	Declaration of Conformity	other
--------------------------	---------------------------	-------



GOST



EG-Konf.

[Confirmation](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/4AC2402/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=4AC2402


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

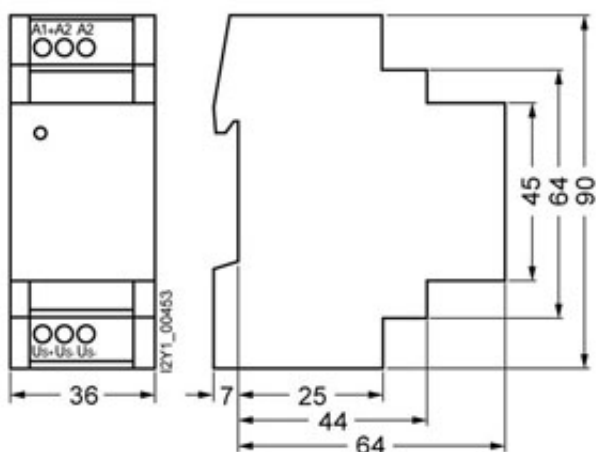

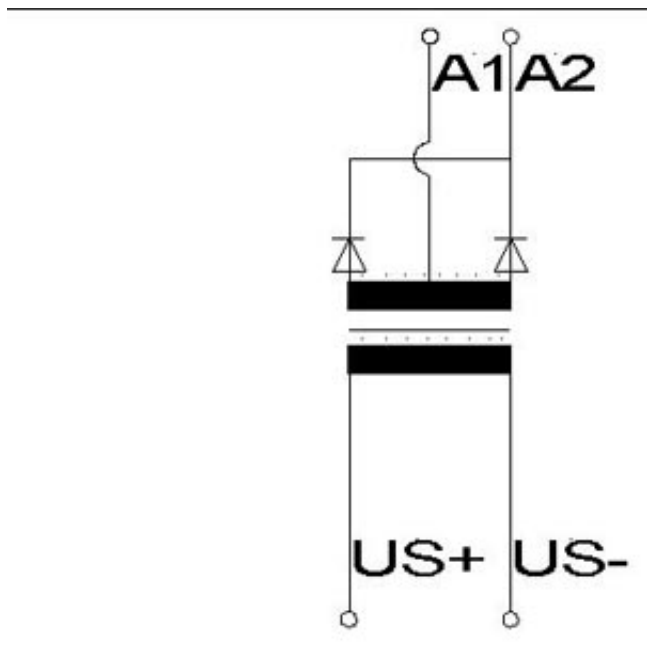

last change:

Feb 17, 2013