



DIAZED FUSE LINK 500V F. CABLE AND LINE PROTECTION OP.CLASS GL, SIZE DIII THREAD E33, 63A

Similar to image

Technical data:

Color coding of the fuse link		copper
Current / for AC / rated value	A	63
Tripping characteristic class		others
Size of the fallback-system / acc. to DIN EN 60269-1		DIII
Supply voltage		
• for AC / rated value	V	500
• for DC	V	500
Switching capacity current		
• in accordance with IEC 60947-2 / rated value	kA	50
• with DC / in accordance with IEC 60947-2 / rated value	kA	8
Ambient temperature		
• minimum	°C	-5
• maximum	°C	40

Certificates/approvals:

General Product Approval**Declaration of Conformity**

GOST



KEMA



VDE



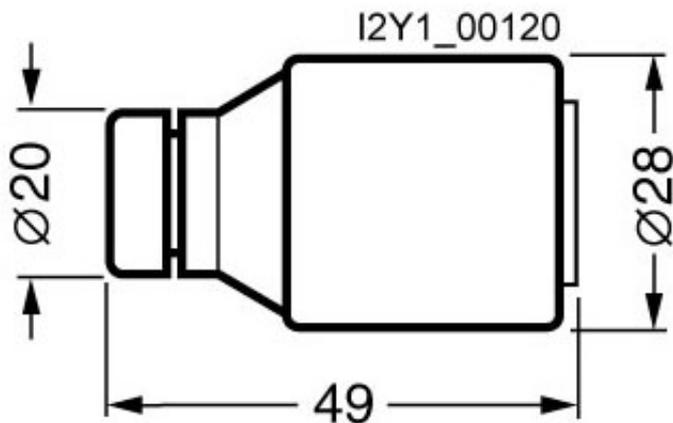
ÖVE



EG-Konf.

Test Certificates**Shipping Approval****other**[Special Test Certificate](#)[Type Test Certificates/Test Report](#)

GL

[Environmental Confirmations](#)**Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/lowvoltage/catalogs>**Industry Mall (Online ordering system)**<http://www.siemens.com/lowvoltage/mall>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<http://support.automation.siemens.com/WW/view/en/5SB431/all>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SB431**CAX-Online-Generator**<http://www.siemens.com/cax>

last change:

Nov 4, 2012