



BASE ELEMENT 2 WIRE ROUGH PROT. FOR DIN RAIL  
MOUNTING FOR ROUGH PROTECTION OF 2 SIGNAL  
WIRES MOUNTING FOOT DIRECT EARTHED FOR  
PLUGGING MODULE 5SD7502-0

Similar to image

| Technical data:                                                                                                                                                                                                  |     |                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----------------------|
| product brand name                                                                                                                                                                                               |     | SETRON               |
| Degree of pollution                                                                                                                                                                                              |     | 2                    |
| Overvoltage category / according to IEC 61010-1                                                                                                                                                                  |     | III                  |
| Product component / fuse                                                                                                                                                                                         |     | No                   |
| Protection class IP                                                                                                                                                                                              |     | IP20                 |
| Insulation material                                                                                                                                                                                              |     | PA 6.6               |
| Combustibility class acc. to UL 94                                                                                                                                                                               |     | V0                   |
| Ambient temperature                                                                                                                                                                                              | °C  | -40 ... +85          |
| Mounting type <ul style="list-style-type: none"><li>• for rigid conductor / maximum</li><li>• for rigid conductor / minimum<ul style="list-style-type: none"><li>• maximum</li><li>• minimum</li></ul></li></ul> |     | Rail-mountable NS 35 |
|                                                                                                                                                                                                                  | mm² | 4                    |
|                                                                                                                                                                                                                  | mm² | 0.2                  |
|                                                                                                                                                                                                                  | mm² | 2.5                  |
|                                                                                                                                                                                                                  | mm² | 0.2                  |
| Connectable AWG conductor cross-section / as coded AWG spec. / for grounding <ul style="list-style-type: none"><li>• finely stranded</li></ul>                                                                   |     |                      |
|                                                                                                                                                                                                                  | mm² | 24 ... 12            |
| Product component / remote-signaling contact                                                                                                                                                                     |     | No                   |
| Size of the surge arrester                                                                                                                                                                                       |     | 1WM                  |

**SPD classification / according to EN 61643-11**

- test class II type 2

No

**Net weight**


g

50

**Certificates/approvals:****General Product Approval**

GOST

**Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/lowvoltage/catalogs>**Industry Mall (Online ordering system)**<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SD7500-0>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<http://support.automation.siemens.com/WW/view/en/5SD7500-0/all>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SD7500-0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SD7500-0)**CAX-Online-Generator**<http://www.siemens.com/cax>

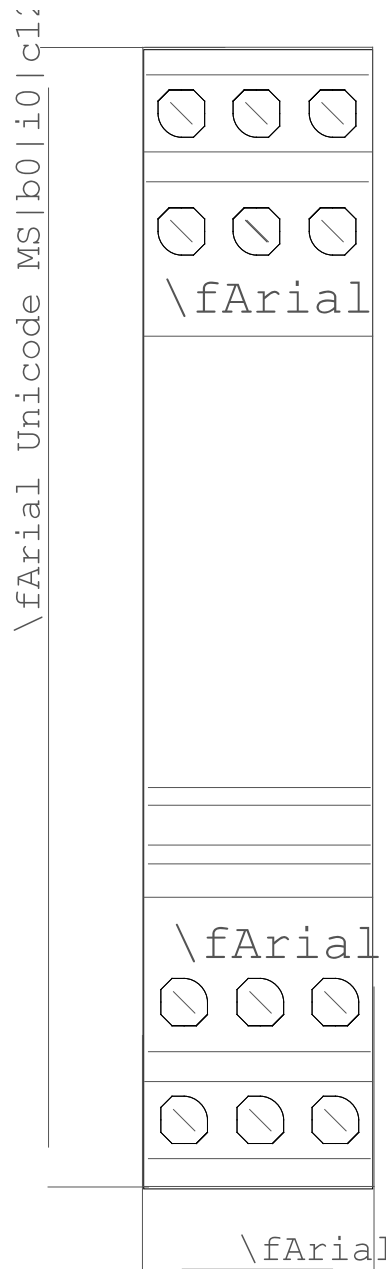

last change:

Jun 30, 2014