



SILIZED FUSE LINK 400 V  
GR, SEMICOND. PROTECT. GR. D02 25 A

Similar to image

### Technical data:

|                                                      |   |                                    |
|------------------------------------------------------|---|------------------------------------|
| Operating class of the fuse link                     |   | gR (complete converter protection) |
| Color coding of the fuse link                        |   | others                             |
| Size of the fallback-system / acc. to DIN EN 60269-1 |   | D02                                |
| Operating voltage / rated value                      | V | 400                                |
| Operating current / rated value                      | A | 25                                 |

### Certificates/approvals:

General Product  
Approval

other



[Environmental  
Confirmations](#)

### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)


<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SE1325/all>

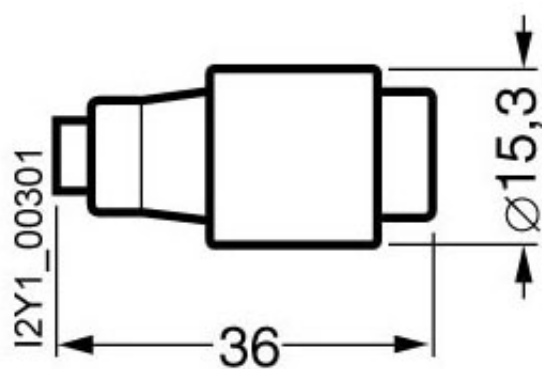

last change:

Jan 23, 2013