

NEOZED FUSE LINK 400V GL, SIZE D03, 80A



Similar to image

Technical data:		
Color coding of the fuse link		blue
Current / for AC / rated value	A	80
Operating class of the fuse link		gG
Size of the fallback-system / acc. to DIN EN 60269-1		D03
Supply voltage		
• for AC / rated value	V	400
Switching capacity current / in accordance with IEC 60947-2 / rated value	kA	50
Design of the fuse link		NEOZED fuse links
mounting position		Any, preferably vertical
Protection class IP		IP20, with connected conductors
Climatic class		Up to 45°C at 95 % rel. humidity
Ambient temperature		
• minimum	°C	-5
• maximum	°C	40
Certificates/approvals:		

General Product Approval		Declaration of Conformity	Test Certificates		other
			Special Test Certificate	Type Test Certificates/Test Report	Environmental Confirmations
GOST	VDE	EG-Konf.			

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SE2280>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SE2280/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SE2280

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

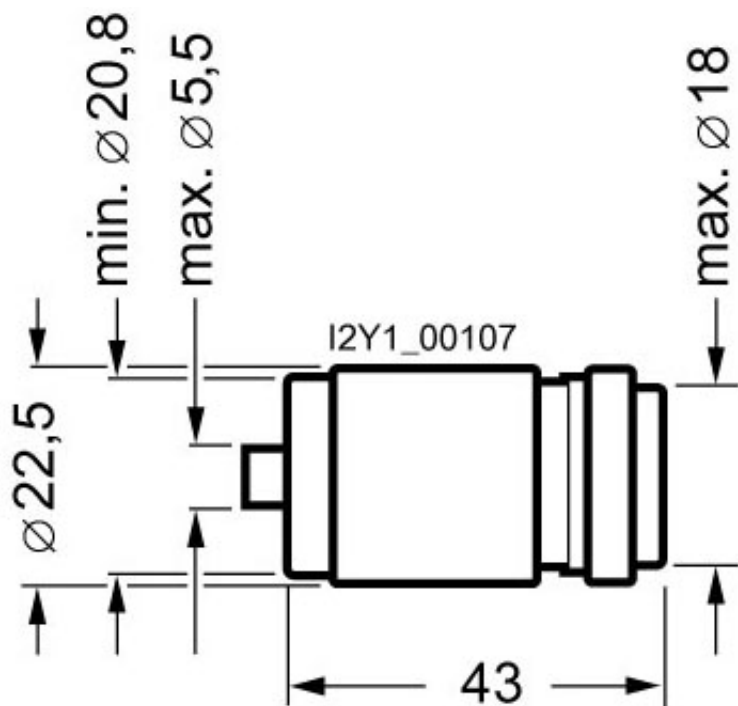

last change:

Jul 7, 2014