



MINIIZED SWITCH DISCONNECTOR FOR NEOZED FUSE-LINK 50 A D02,
3-POLE DRAW-OUT ASSEMBLY

Similar to image

Technical data:

Number of poles		3
Size of the fallback-system / acc. to DIN EN 60269-1		D02
Operating voltage / for AC / rated value	V	400
Current / for AC / rated value	A	50

Certificates/approvals:

General Product Approval

Declaration of
Conformity

Test Certificates



GOST



VDE



EG-Konf.

[Type Test
Certificates/Test
Report](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)




<http://support.automation.siemens.com/WW/view/en/5SG7133-8BA50/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SG7133-8BA50

Tender specifications

Datanorm [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

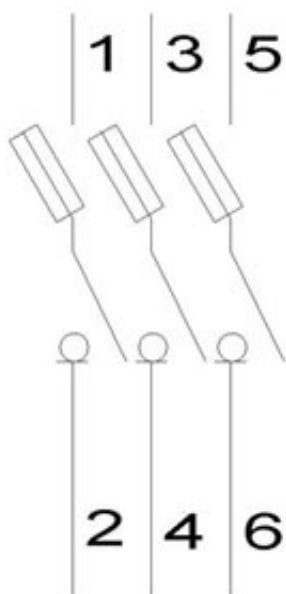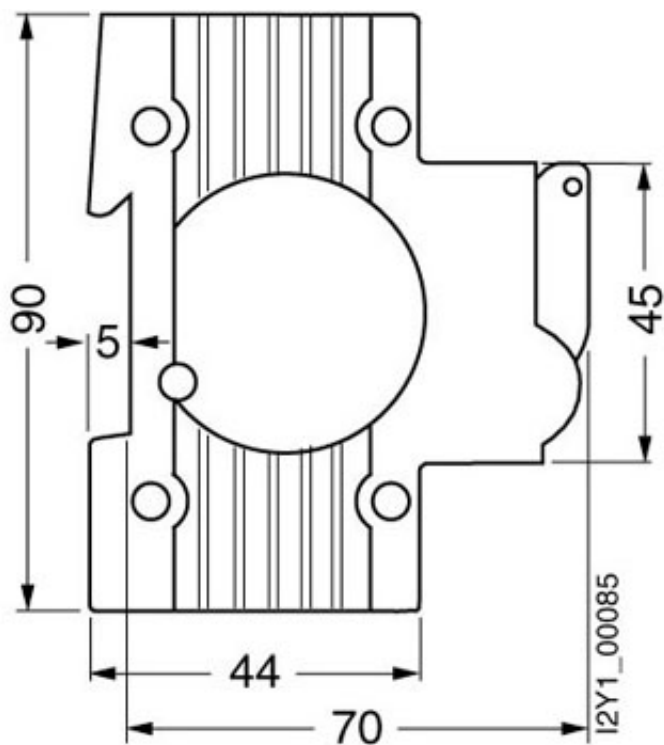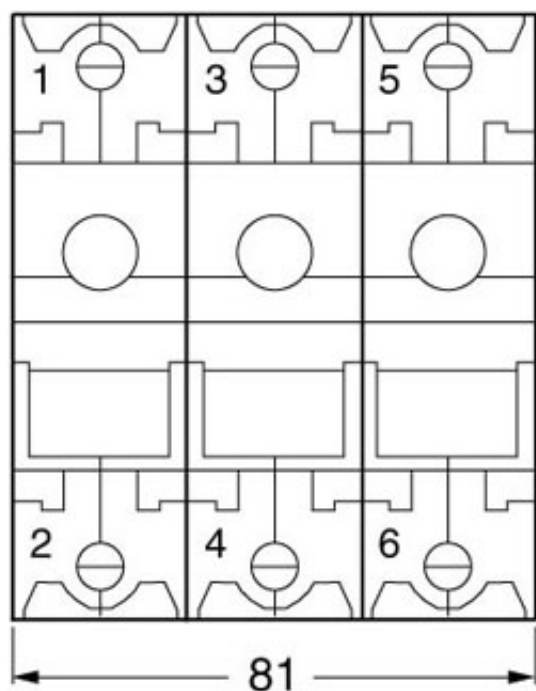

last change:

Jan 30, 2013