

MINIZED, Fuse switch disconnecter, D01, 1-pole, In: 16 A, Un AC: 230 V



Figure similar

General technical data		
Number of poles		1
Size of fuse system / acc. to DIN EN 60269-1		D01
Overvoltage category		4
Voltage		
Surge voltage resistance / rated value	kV	6
Protection class		
Protection class IP		IP20, with connected conductors
Electricity		
Current / at AC / rated value	A	16
Main circuit		
Operating voltage / at AC / rated value	V	230
Product details		
Product feature / sealable		Yes
Connections		

Tightening torque / with screw-type terminals		
• minimum	N·m	2.5
• maximum	N·m	3

Mechanical Design

Height	mm	70
Width	mm	18
Depth	mm	88
Mounting position		any, preferably vertical
Net weight	g	67

Certificates

Equipment marking		
• acc. to DIN EN 61346-2		F
• acc. to DIN EN 81346-2		F

General Product Approval	Declaration of Conformity
---------------------------------	----------------------------------



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SG7611-0KK16>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SG7611-0KK16/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SG7611-0KK16

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

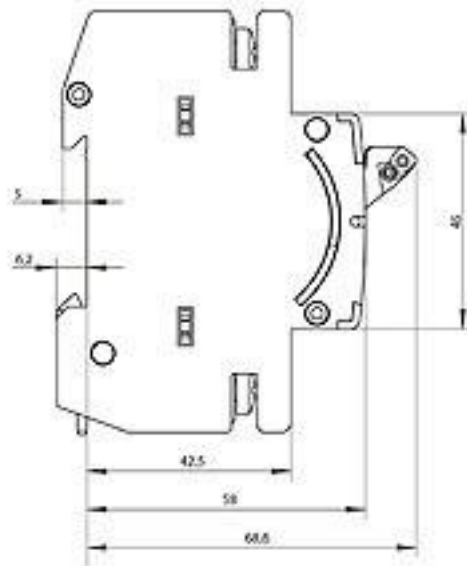
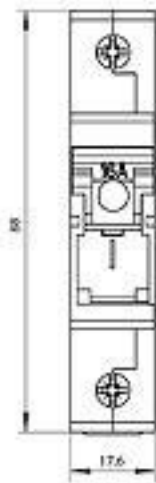


Figure similar

last modified:

08/11/2016