



MINIZED-FUSE-SWITCH-DISCONNECT. FOR NEOZED  
FUSE LINK 2-16A D01/16A,  
2POLE, D=70MM

Similar to image

### Technical data:

|                                                      |   |     |
|------------------------------------------------------|---|-----|
| Number of poles                                      |   | 2   |
| Size of the fallback-system / acc. to DIN EN 60269-1 |   | D01 |
| Operating voltage / for AC / rated value             | V | 230 |
| Current / for AC / rated value                       | A | 16  |

### Certificates/approvals:

General Product Approval

Declaration of Conformity



### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)


<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SG7620/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SG7620](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SG7620)

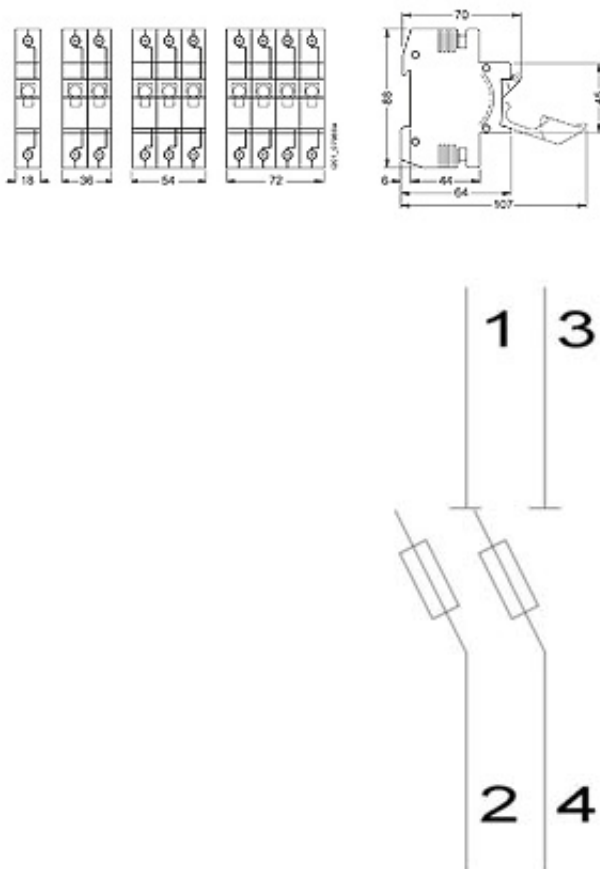

last change:

Jan 30, 2013