

MINIZED, Fuse switch disconnecter, D01, 3-pole, In: 16 A, Un AC: 400 V



| General technical data                        |    |                                 |
|-----------------------------------------------|----|---------------------------------|
| Number of poles                               |    | 3                               |
| Size of fuse system / acc. to DIN EN 60269-1  |    | D01                             |
| Overvoltage category                          |    | 4                               |
| Voltage                                       |    |                                 |
| Surge voltage resistance / rated value        | kV | 6                               |
| Protection class                              |    |                                 |
| Protection class IP                           |    | IP20, with connected conductors |
| Electricity                                   |    |                                 |
| Current / at AC / rated value                 | A  | 16                              |
| Main circuit                                  |    |                                 |
| Operating voltage / at AC / rated value       | V  | 400                             |
| Product details                               |    |                                 |
| Product feature / sealable                    |    | Yes                             |
| Connections                                   |    |                                 |
| Tightening torque / with screw-type terminals |    |                                 |

- minimum
- maximum

|     |     |
|-----|-----|
| N·m | 2.5 |
| N·m | 3   |

## Mechanical Design

|                   |    |                          |
|-------------------|----|--------------------------|
| Height            | mm | 70                       |
| Width             | mm | 54                       |
| Depth             | mm | 88                       |
| Mounting position |    | any, preferably vertical |
| Net weight        | g  | 203                      |

## Certificates

### Equipment marking

- acc. to DIN EN 61346-2
- acc. to DIN EN 81346-2

F  
F

## General Product Approval

## Declaration of Conformity



EG-Konf.

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SG7631-0KK16>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SG7631-0KK16/all>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SG7631-0KK16](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SG7631-0KK16)

### CAX-Online-Generator

<http://www.siemens.com/cax>

### Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

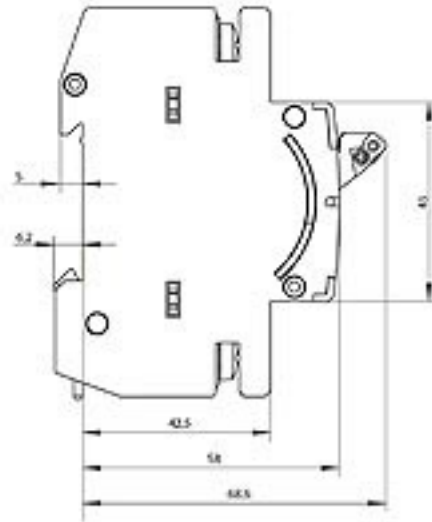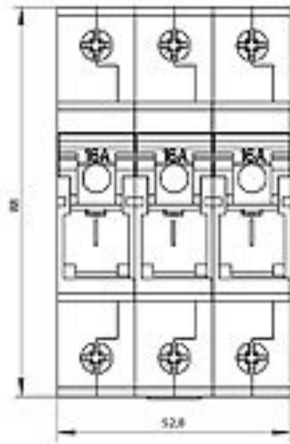

last modified:

08/24/2016