

BUSBAR W. PUNCHINGS,  
MODULAR SIZE 27MM FOR NEOZED FUSE BASE D02  
COPPER BARE,  
36SQMM, 1000MM



Similar to image

### Technical data:

|                                 |    |            |
|---------------------------------|----|------------|
| product brand name              |    | SETRON     |
| Operating current / rated value | A  | 168        |
| Busbar design                   |    | flat       |
| Traitement de surface / étamé   |    | No         |
| Material / of the busbar        |    | SF-Cu F 24 |
| Product property / flexible     |    | Yes        |
| Length                          | mm | 1,000      |
| Width                           | mm | 3          |
| Thickness / of busbar           | mm | 12         |
| Net weight                      | g  | 256.79     |

### Certificates/approvals:

|                          |                           |
|--------------------------|---------------------------|
| General Product Approval | Declaration of Conformity |
|--------------------------|---------------------------|



### Further information:

---

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

---

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SH5322>

---

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SH5322/all>

---


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SH5322](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SH5322)

---

CAX-Online-Generator

<http://www.siemens.com/cax>

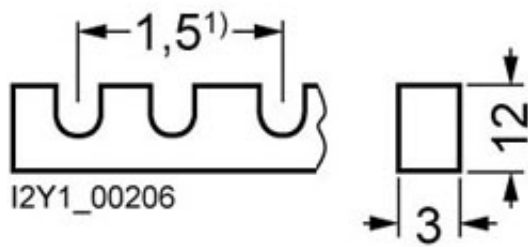

<sup>1)</sup> Fork spacings in MW (Modular widths, 1 MW = 18 mm).

last change:

Jul 10, 2014