SIEMENS


Data sheet 5SL4304-8



Miniature circuit breaker 400 V 10kA, 3-pole, D, 4A

Model		
product brand name	SENTRON	
product designation	Miniature circuit breaker	
General technical data		
number of poles	3	
design of pole	3P	
tripping characteristic class	D	
mechanical service life (operating cycles) typical	10 000	
overvoltage category	III	
degree of pollution	2	
Voltage		
type of voltage of the operating voltage	AC	
insulation voltage (Ui)		
 with multi-phase operation at AC rated value 	440 V	
operational current		
 at 30 °C rated value 	4 A	
 at 40 °C rated value 	3.84 A	
• at 55 °C rated value	3.58 A	
at AC rated value	4 A	
Supply voltage		
supply voltage at AC rated value	400 V	
value range of the supply voltage frequency	50/60 Hz	
operating voltage		
 with multi-phase operation at AC maximum 	440 V	
at DC rated value maximum	72 V	
Protection class		
protection class IP	IP20, with connected conductors	
Breaking Capacity		
switching capacity current		
 according to EN 60898 rated value 	10 kA	
 according to IEC 60947-2 rated value 	10 kA	
energy limitation class	3	
Dissipation		
power loss [W] for rated value of the current at AC in hot operating state per pole	1.1 W	
suitability for operation	Residential buildings/infrastructure	
Product details		
product feature		
• halogen-free	Yes	
sealable	Yes	

• silicon-free	Yes
product extension installable supplementary devices	Yes
Connections	
connectable conductor cross-section solid	
• minimum	0.75 mm²
maximum	25 mm²
connectable conductor cross-section stranded	
• minimum	0.75 mm²
maximum	25 mm²
connectable conductor cross-section finely stranded with core end processing	
• minimum	0.75 mm²
maximum	25 mm²
tightening torque with screw-type terminals	
• minimum	2.5 N·m
• maximum	3 N·m
Mechanical Design	
height	90 mm
width	54 mm
depth	76 mm
installation depth	70 mm
number of modular width units	3
mounting position	any
net weight	440 g
Environmental conditions	
ambient temperature during operation	
• minimum	-25 °C
maximum	55 °C
ambient temperature during storage	
• minimum	-40 °C
• maximum	75 °C
Approvals Certificates	
Ganaral Braduet Approval	





Confirmation









General Product Approval Test Certificates other **Environment** Miscellaneous Miscellaneous Confirmation Miscellaneous **Environmental Confirmations**

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SL4304-8

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/5SL4304-8

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SL4304-8

CAx-Online-Generator Tender specifications

http://www.siemens.com/cax

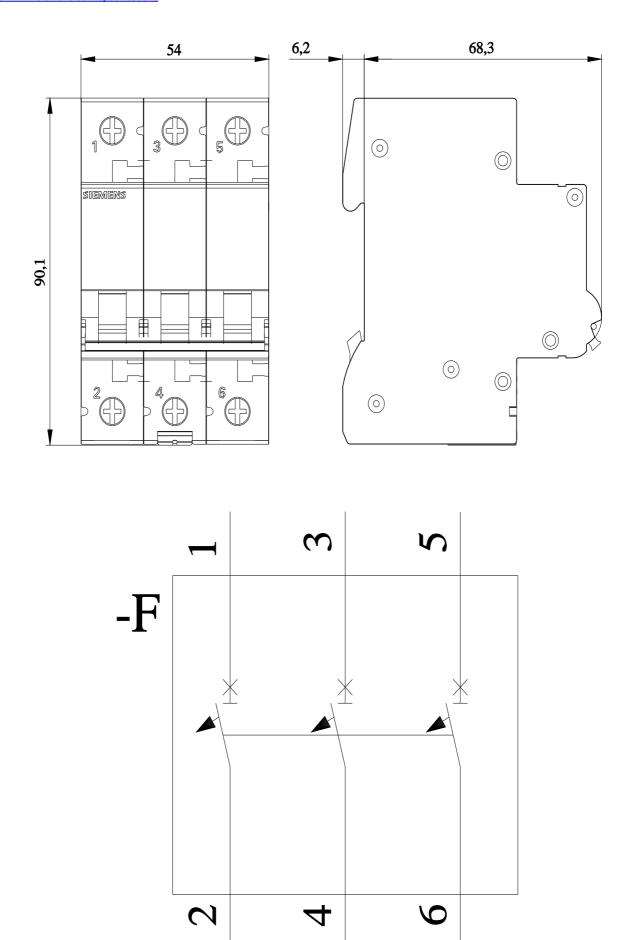

last modified: 8/12/2022 🖸