SIEMENS

Product data sheet 5SM3322-4

Similar to image

RES.CURR. OP.CIRC. BR. SIQUENCE TYPE B SENS. TO. UNIV. CURRENT 25A 1+N POL IFN 30MA 230V 4MW SHORT-TIME DELAYED DIN VDE 0664-100

Technical data:		
mounting position		any
Height	mm	90
Width	mm	36
Depth	mm	70
Design of the product		Short-time delayed
Supply voltage / for AC / rated value	V	230
Resistance against the impulse current / rated value	kA	3
Ambient temperature	°C	-25 … +45
Ambient temperature		
• during storage	°C	-40 … +75
Mechanical operating cycles as operating time / typical		10,000
Overvoltage class		III
Supply voltage / for testing equipment / minimum	V	150
Protection against electrical shock		Finger and back-of-hand safe
Position / of power supply cord		top or bottom
Tightening torque		
• with screw-type terminals	N·m	2.5 … 3
Section de conducteur raccordable		

subject to modifications
© Copyright Siemens AG 2013

• solid	mm²	1.5 … 25
• multibrin	mm²	1.5 … 25
Product feature		
• [not supplied - silicon-free]		Yes
• halogen-free		Yes
Number of test cycles / for environmental testing / in accordance with IEC 60068-2-30		28
Device tag		
• according to DIN EN 61346-2		F
• according to DIN EN 81346-2		F

Certificates/approvals:

General Product Approval	Declaration of Conformity

Further information:

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
http://www.siemens.com/lowvoltage/mall

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
http://support.automation.siemens.com/WW/view/en/5SM3322-4/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SM3322-4

CAx-Online-Generator
http://www.siemens.com/cax

Tender specifications
Datanorm GAEB81 GAEB83 RTF TXT

© Copyright Siemens AG 2013

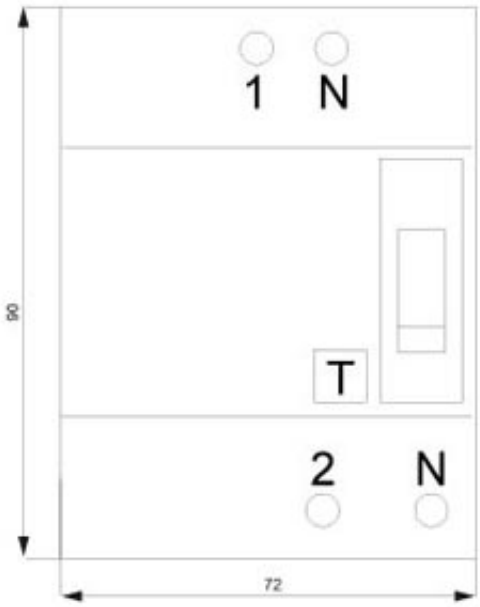

last change: Dec 31, 2012

© Copyright Siemens AG 2013