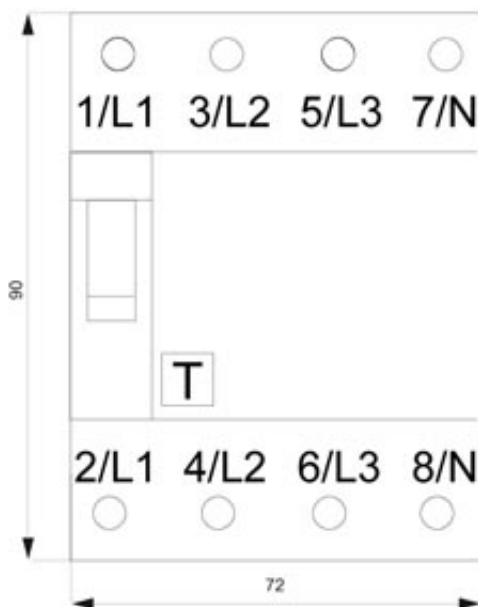


Similar to image

RES.CURRENT OP.CIRCUIT BREAKER TYPE A PSE/SSF
100A 3+N-POL IFN 100MA 400V 4MW

Technical data:		
mounting position		any
Height	mm	90
Width	mm	72
Depth	mm	77
Design of the product		Instantaneous
Supply voltage / for AC / rated value	V	400
Resistance against the impulse current / rated value	kA	1
Ambient temperature	°C	-25 ... +45
Ambient temperature during storage	°C	-40 ... +75
Mechanical operating cycles as operating time / typical		10,000
Overvoltage class		III
Supply voltage / for testing equipment / minimum	V	195
Protection against electrical shock		Finger and back-of-hand safe
Position / of power supply cord		top or bottom
Tightening torque with screw-type terminals	N·m	3 ... 3.5
Section de conducteur raccordable - solid - multibrin	mm ² mm ²	2.5 ... 50 2.5 ... 50
Product feature [not supplied - silicon-free] - halogen-free		Yes Yes
Number of test cycles / for environmental testing / in accordance with IEC 60068-2-30		28
Device tag - according to DIN EN 61346-2 - according to DIN EN 81346-2		F F

Certificates/approvals:

**Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/lowvoltage/catalogs>**Industry Mall (Online ordering system)**<http://www.siemens.com/lowvoltage/mall>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<http://support.automation.siemens.com/WW/view/en/5SM3448-6/all>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SM3448-6**CAX-Online-Generator**<http://www.siemens.com/cax>**last change:**

Dec 31, 2012