

FORK-TYPE BUSBAR SHOCK-PROOF,
2-PHASE 16 SQMM, 12 SPACING UNITS



Similar to image

Technical data:

product brand name		SETRON
Operating current / rated value	A	120
Busbar design		laminated
Traitement de surface / étamé		No
Material / of the busbar		SF-Cu F 24
Product property / flexible		Yes
Length	mm	220
Width	mm	15.1
Thickness / of busbar	mm	15

Certificates/approvals:

General Product Approval	Declaration of Conformity	other
--------------------------	---------------------------	-------



GOST



EG-Konf.

[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5ST2187>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/5ST2187/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST2187

CAX-Online-Generator

<http://www.siemens.com/cax>

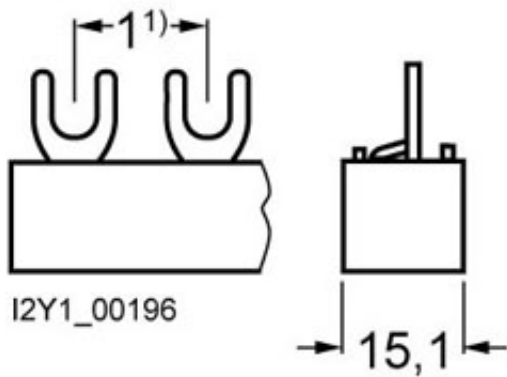

1) Fork spacings in MW (Modular widths, 1 MW = 18 mm).

last change:

Jul 10, 2014