

REMOTE-CONTR.MECHAN. 230V FOR 5SM3



Similar to image

Technical data:		
Number of NC contacts		0
Product extension		remote operating mechanism
Number of change-over switches		0
Number of NO contacts		0
Number of pitch units for width		3.5
Breaking capacity current / nominal value	A	125
Operating voltage / rated value	V	230
Design of product / factory mounted		No
Product extension / can be mounted		residual current operated circuit breaker
Number of fault signal contacts		0
Type of voltage / of the control voltage		AC

Certificates/approvals:		
General Product Approval	Declaration of Conformity	other



[other](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5ST3051/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3051


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

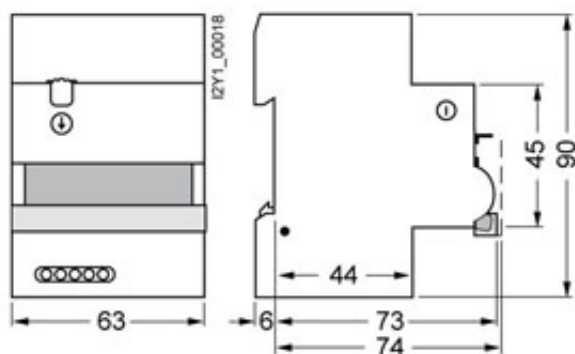

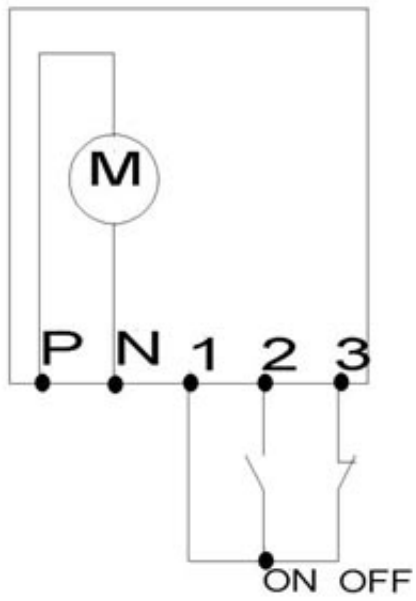

last change:

Feb 15, 2013