


PIN BUSBAR,
10 SQMM CONNECT.: 2X(3X(1XPHASE+HS/FS)) SAFE-TO
-TOUCH

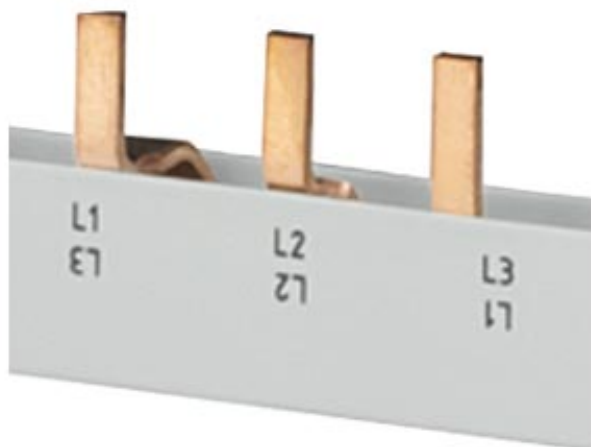

Similar to image

Technical data:

Busbar design		laminated
Length	mm	125
Width	mm	9.2
Operating current / rated value	A	63
Thickness / of busbar	mm	15.2
Material / of the busbar		SF-Cu F 24
Product property / flexible		No
Traitement de surface / étamé		No

Certificates/approvals:

General Product Approval	other
--------------------------	-------




[other](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

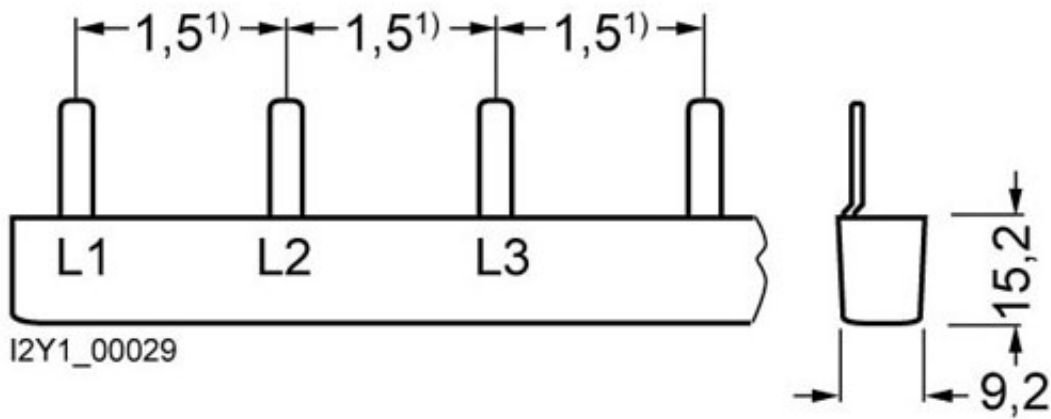

¹) Pin spacings in MW (Modular widths, 1 MW = 18 mm).

last change:

Nov 29, 2012